

ATTACHMENT F
RCRA CONTINGENCY PLAN

(This page intentionally blank)

ATTACHMENT F

RCRA CONTINGENCY PLAN

TABLE OF CONTENTS

List of Tables	F-iii
List of Figures	F-iii
List of Drawings	F-iii
<u>Introduction</u>	F-1
F-1 <u>General Information</u>	F-1
F-1a <u>Disposal Phase Overview</u>	F-3
F-1b <u>Waste Description</u>	F-4
F-1c <u>Containers</u>	F-5
F-1d <u>Description of Containers</u>	F-6
F-1e <u>Description of Surface Hazardous Waste Management Units</u>	F-6
F-1e(1) <u>CH Bay Operations</u>	F-6
F-1e(2) <u>RH Complex Operations</u>	F-7
F-1e(3) <u>Parking Area Container Storage Unit (Parking Area Unit)</u>	F-7
F-1f <u>Off-Normal Events</u>	F-8
F-1g <u>Containment</u>	F-8
F-2 <u>Response Personnel</u>	F-9
F-3 <u>Implementation</u>	F-10
F-4 <u>Emergency Response Method</u>	F-12
F-4a <u>Notification</u>	F-13
F-4a(1) <u>Initial Emergency Response and Alerting the RCRA Emergency Coordinator</u>	F-13
F-4a(2) <u>Communication of Emergency Conditions to Facility Employees</u> ..	F-15
F-4a(3) <u>Notification of Local, State, and Federal Authorities</u>	F-16
F-4a(4) <u>Notification of the General Public</u>	F-18
F-4b <u>Identification of Hazardous Materials</u>	F-18
F-4c <u>Assessment of the Nature and Extent of the Emergency</u>	F-19
F-4d <u>Control, Containment, and Correction of the Emergency</u>	F-20
F-4d(1) <u>All Emergencies</u>	F-20
F-4d(2) <u>Fire</u>	F-22
F-4d(3) <u>Explosion</u>	F-24
F-4d(4) <u>Spills</u>	F-25
F-4d(5) <u>Decontamination of Personnel</u>	F-26

F-4d(6) <u>Control of Spills or Leaking or Punctured Containers of CH and RH TRU Mixed Waste</u>	F-26
<u>CH TRU Mixed Waste</u>	
<u>RH TRU Mixed Waste</u>	
F-4d(7) <u>Natural Emergencies</u>	F-30
F-4d(8) <u>Roof Fall</u>	F-30
<u>Spalling-of-Ground Scenario</u>	
<u>Fall-of-Ground Scenario</u>	
<u>Spalling-of-Ground Actions</u>	
<u>Fall-of-Ground Actions</u>	
F-4d(9) <u>Structural Integrity Emergencies</u>	F-34
F-4d(10) <u>Emergency Termination Procedures</u>	F-34
F-4e <u>Prevention of Recurrence or Spread of Fires, Explosions, or Releases</u>	F-36
F-4f <u>Management and Containment of Released Material and Waste</u>	F-37
F-4g <u>Incompatible Waste</u>	F-39
F-4h <u>Post-Emergency Facility and Equipment Maintenance and Reporting</u>	F-39
F-4i <u>Container Spills and Leakage</u>	F-40
F-4j <u>Tank Spills and Leakage</u>	F-40
F-4k <u>Surface Impoundment Spills and Leakage</u>	F-40
F-5 <u>Emergency Equipment</u>	F-40
F-6 <u>Coordination Agreements</u>	F-41
F-7 <u>Evacuation Plan</u>	F-43
F-7a <u>Surface Evacuation On-site and Off-site Staging Areas</u>	F-43
F-7b <u>Underground Assembly Areas and Egress Hoist Stations</u>	F-43
F-7c <u>Plan for Surface Evacuation</u>	F-44
F-7d <u>Plan for Underground Evacuation</u>	F-44
F-7e <u>Further Site Evacuation</u>	F-44
F-8 <u>Required Reports</u>	F-45
F-9 <u>Location of the Contingency Plan and Plan Revision</u>	F-46
References	F-47

List of Tables

Table	Title
F-1	Hazardous Substances in Large Enough Quantities to Constitute a Level II Incident
F-2	Resource Conservation and Recovery Act Emergency Coordinators
F-3	Planning Guide for Determining Incident Levels and Responses
F-4	Physical Methods of Mitigation
F-5	Chemical Methods of Mitigation
F-6	Emergency Equipment Maintained at the Waste Isolation Pilot Plant
F-7	Types of Fire Suppression Systems by Location
F-8	Hazardous Release Reporting, Federal
F-9	Hazardous Release Reporting, State of New Mexico

List of Figures

Figure	Title
F-1	WIPP Surface Structures
F-1a	Legend to Figure F-1
F-2	Spatial View of the WIPP Facility
F-3	WIPP Underground Facilities
F-4	Direction and Control Under Emergency Conditions in Which the Plan Has Been Implemented
F-4a	WIPP Facility Emergency Notifications
F-5	Underground Emergency Equipment Locations and Underground Evacuation Routes
F-6	Fire-Water Distribution System
F-7	Underground Diesel Fuel-Station Area Fire-Protection System
F-8	WIPP On-Site Assembly Areas and WIPP Staging Areas
F-8a	RH Bay Evacuation Routes
F-8b	RH Bay Hot Cell Evacuation Route
F-8c	Evacuation Routes in the Waste Handling Building
F-9	Designated Underground Assembly Areas
F-10	Waste Handling Building Pre-Fire Survey (First Floor)
F-10a	Waste Handling Building Pre-Fire Survey (First Floor - Fire Hydrant/Post Indicator Location)
F-11	Waste Handling Building Pre-Fire Survey (Second Floor)
F-11a	Waste Handling Building Pre-Fire Survey (Second Floor - Fire Hydrant/Post Indicator Location)
F-12	WIPP Hazardous Materials Incident Report

List of Drawings

Drawing	Title
41-F-087-014	Waste Handling Building 411 Fire Water Collection System Flow Diagram

(This page intentionally blank)

ATTACHMENT F

RCRA CONTINGENCY PLAN

1 Introduction

2 The WIPP facility is owned and co-operated by the Department of Energy (**DOE**) and co-
3 operated by its designated Management and Operating Contractor (**MOC**) (Permit Condition
4 I.D.3).

5 This Contingency Plan was prepared in accordance with the Resource Conservation and
6 Recovery Act (**RCRA**) requirements codified in Title 20 of the New Mexico Administrative Code,
7 Chapter 4.1.500 (20.4.1.500 NMAC, incorporating 40 CFR §264.50 to §264.56), "Contingency
8 Plan and Emergency Procedures," and submitted in compliance with 20.4.1.900 NMAC
9 (incorporating 40 CFR §270.14(b)(7)). The purpose of this document is to define
10 responsibilities, to describe coordination of activities, and to minimize hazards to human health
11 and the environment from fires, explosions, or any sudden or nonsudden release of hazardous
12 waste, or hazardous waste constituents to air, soil, or surface water (20.4.1.500 NMAC
13 (incorporating 40 CFR §264.51 [a])). This plan consists of descriptions of processes and
14 emergency responses specific to hazardous substances, contact-handled (**CH**) and remote-
15 handled (**RH**) transuranic (**TRU**) mixed waste and other hazardous waste handled at the WIPP
16 facility.

17 F-1 General Information

18 The WIPP facility is located 26 miles (mi) (42 kilometers [km]) east of Carlsbad, in Eddy County
19 in southeastern New Mexico, and includes an area of 10,240 acres (ac) (4,144 hectares [ha]).
20 The facility is located in an area of low-population density, with fewer than 30 permanent
21 residents living within a 10 mi (16 km) radius of the facility. The area surrounding the facility is
22 used primarily for grazing, potash mining, and mineral exploration. Resource development that
23 would affect WIPP facility operations or the long-term integrity of the facility is not allowed within
24 the 10,240 ac (4,144 ha) that have been set aside for the WIPP Project.

25 The WIPP facility is designed to receive containers of TRU waste, which will be transported to
26 the WIPP facility from the ten major and other minor DOE TRU mixed waste generator and/or
27 storage sites. The waste will be emplaced in the bedded salt of the Salado Formation,
28 2,150 feet (ft) (655 meters [m]) below ground surface.

29 As a geologic facility for the management of TRU mixed waste, the WIPP repository is regulated
30 as a "miscellaneous unit," as defined under 20.4.1.500 NMAC (incorporating 40 CFR §264.601
31 to §264.603). The areas at the WIPP facility subject to this permit include the surface container
32 storage areas in the Waste Handling Building (**WHB**) Container Storage Unit (**WHB Unit**) and
33 the Parking Area Container Storage Unit (**Parking Area Unit**), located south of the WHB, and
34 the areas below ground in which waste will be emplaced.

1 The WIPP facility includes other surface structures, shafts, and underground areas (Figures
2 F-1, F-2, and F-3). Surface structures other than the WHB, that support TRU mixed waste
3 management include:

4 Exhaust Filter Building - houses the filter banks to which the underground ventilation can
5 be diverted in the unlikely event of an underground release of radionuclides.

6 Guard and Security Building - houses the facility security personnel and communications
7 equipment necessary for them to perform their duties. Section F-4a specifies the duties
8 of the security officers relative to contingency actions.

9 Safety and Emergency Services Building - houses the surface emergency response
10 vehicles (fire truck, rescue truck, ambulance), Health Services (first aid), Emergency
11 Operations Center, and the Dosimetry Laboratory. The Hazardous Material Response
12 Trailer is staged at the WIPP facility in an area that is readily accessible to Emergency
13 Services. Emergency Services is located in Building 452. Table F-6 describes
14 emergency equipment and associated locations.

15 Support Building - houses the Central Monitoring Room (see section F-4a).

16 Transuranic Package Transporter-II (**TRUPACT-II**) Maintenance Facility - is located west
17 of the CH bay. No TRU mixed waste management activities will occur in this facility.

18 Surface facilities used for storage of support equipment are identified in Table F-6.

19 Building 452, Safety and Emergency Services Facility, houses the emergency response
20 vehicles, emergency equipment, the mine rescue room, mine rescue team equipment, and the
21 Emergency Operations Center (**EOC**). The Hazardous Material Response Trailer is staged at
22 the WIPP facility in an area readily accessible to Emergency Services. Emergency Services is
23 located in Building 452.

24 The RCRA permit addresses TRU mixed waste management activities in the WHB Unit, the
25 Parking Area Unit, and the disposal units. The provisions of this Contingency Plan apply to
26 hazardous waste disposal units (**HWDU**) in the underground waste disposal panels, storage in
27 the WHB Unit and the Parking Area Unit, the Waste Shaft, and supporting TRU mixed waste
28 handling areas. The remainder of the facility will not manage TRU mixed waste. This
29 Contingency Plan has also been designed in accordance with 20.4.1.300 NMAC (incorporating
30 40 CFR § 262.34(a)(4) - Standards for Generators of Hazardous Waste), and will be
31 implemented whenever there is a fire, explosion, or release of hazardous waste which could
32 threaten human health or the environment. Hazardous substances in the remainder of the
33 facility are included as possible triggers of the Contingency Plan but are outside the scope of
34 the regulations promulgated pursuant to RCRA. This allows WIPP to maintain one emergency
35 response plan which is consistent with the National Response Teams Integrated Contingency
36 Plan Guidance (Federal Register, Vol. 61, No. 109, June 5, 1996). Inclusion is based on their
37 National Fire Protection Association (**NFPA**) ratings in addition to their storage quantities. The
38 majority of hazardous substances on-site are not expected to trigger the Contingency Plan
39 because they are present in the same form and concentration as the product packaged for
40 distribution and use by the general public or are used in a laboratory under the direct

1 supervision of a technically qualified individual. Superfund Amendments and Reauthorization
2 Act (**SARA**) Title III excludes these from emergency planning reporting. The list of hazardous
3 substances in large enough quantities to constitute a Level II incident (Section F-3) is provided
4 in Table F-1. In addition to TRU mixed waste, these are the only hazardous substances
5 currently on site which, if spilled, may be of sufficient impact to cause this Contingency Plan to
6 be implemented. Magnesium Oxide (**MgO**) is stored on-site in large quantities. It is used as
7 backfill in the waste emplacement rooms as a pH buffer. The pH buffer will limit the solubility of
8 radionuclides after the underground rooms are filled and closed. MgO is not a hazardous
9 substance, a release of MgO will not create hazardous waste and poses no threat to human
10 health or the environment, and is therefore not addressed in the Contingency Plan.

11 Wastes generated as a result of maintenance or response actions will be categorized into one
12 of three groups and disposed of accordingly. These are: 1) nonhazardous wastes to be
13 disposed of in an approved landfill, 2) hazardous nonradioactive wastes to be disposed of at an
14 off-site RCRA permitted facility, and 3) TRU mixed waste to be disposed of in the underground
15 HWDUs. Disposal of TRU mixed waste in the WIPP facility is subject to regulation under
16 20.4.1.500 NMAC. As required by 20.4.1.500 NMAC (incorporating 40 CFR §264.601), the
17 Permittees will demonstrate that the environmental performance standards for a miscellaneous
18 unit, which are applied to the HWDUs in the underground, will be met. In addition, the technical
19 requirements of 20.4.1.500 NMAC (incorporating 40 CFR §264.170 to §264.178) are applied to
20 the operation of the container storage units in the WHB Unit and in the Parking Area Unit south
21 of the WHB. Liquid wastes that may be generated as a result of the fire fighting water or
22 decontamination solutions will be managed as follows:

23 Non-Mixed - Hazardous waste liquids contaminated only with hazardous constituents will
24 be placed into containers and managed in accordance with 20.4.1.300 NMAC
25 (incorporating 40 CFR §262.34) requirements. The waste will be shipped to an approved
26 off-site treatment, storage, or disposal facility.

27 Mixed - Liquids contaminated with TRU mixed waste (inside the WHB Unit) will be
28 solidified as they are placed into containers with cement, Aquaset, or absorbent material
29 in them. The solidified materials will be disposed of in the underground WIPP repository
30 as derived waste.

31 This chapter of the permit application describes the HWDUs, the TRU mixed waste
32 management facilities and operations, compliance with the environmental performance
33 standards, and with the applicable technical requirements of 20.4.1.500 NMAC (incorporating
34 40 CFR §264.170 to §264.178 and §264.601, respectively). The configuration of the WIPP
35 facility consists of completed structures; including all buildings and systems for the operation of
36 the facility.

37 F-1a Disposal Phase Overview

38 The Disposal Phase will consist of receiving CH TRU mixed waste shipping containers,
39 unloading and transporting the waste containers to the underground HWDUs, emplacing the
40 waste in the underground HWDUs, and subsequently achieving closure of the underground
41 HWDUs in compliance with applicable State and Federal regulations.

1 The TRU mixed waste that will be disposed at the WIPP facility results primarily from activities
2 related to the reprocessing of plutonium-bearing reactor fuel and fabrication of plutonium-
3 bearing weapons, as well as from research and development. This TRU mixed waste consists
4 largely of such items as paper, cloth, and other organic material; laboratory glassware and
5 utensils; tools; scrap metal; shielding; and solidified sludges from the treatment of wastewater.
6 Much of this TRU mixed waste is also contaminated with substances that are defined as
7 hazardous under 20.4.1.200 NMAC.

8 F-1b Waste Description

9 Waste destined for WIPP are, or were, produced as a byproduct of weapons production and
10 have been identified in terms of waste streams based on the processes that produced them.
11 Each waste stream identified by generators is assigned to a Waste Summary Category to
12 facilitate RCRA waste characterization, and reflect the final waste forms acceptable for WIPP
13 disposal.

14 These Waste Summary Categories are:

15 S3000—Homogeneous Solids

16 Solid process residues defined as solid materials, excluding soil, that do not meet the
17 applicable regulatory criteria for classification as debris (20.4.1.800 NMAC (incorporating
18 40 CFR §268.2[g] and [h])). Included in solid process residues are inorganic process
19 residues, inorganic sludges, salt waste, and pyrochemical salt waste. Other waste
20 streams are included in this Waste Summary Category based on the specific waste
21 stream types and final waste form. This category includes wastes that are at least 50
22 percent by volume solid process residues.

23 S4000—Soils/Gravel

24 This waste summary category includes waste streams that are at least 50 percent by
25 volume soil. Soils are further categorized by the amount of debris included in the matrix.

26 S5000—Debris Wastes

27 This waste summary category includes waste that is at least 50 percent by volume
28 materials that meet the criteria for classification as debris (20.4.1.800 NMAC
29 (incorporating 40 CFR §268.2)). Debris is a material for which a specific treatment is not
30 provided by 20.4.1.800 NMAC (incorporating 40 CFR §268 Subpart D), including
31 process residuals such as smelter slag from the treatment of wastewater, sludges or
32 emission residues.

33 Debris means solid material exceeding a 2.36 inch (60 millimeter) particle size
34 that is intended for disposal and that is: 1) a manufactured object, 2) plant or
35 animal matter, or 3) natural geologic material.

36 Included in the S5000 Waste Summary Category are metal debris, lead containing metal
37 debris, inorganic nonmetal debris, asbestos debris, combustible debris, graphite debris,
38 heterogeneous debris, and composite filters, as well as other minor waste streams.
39 Particles smaller than 2.36 inches in size may be considered debris if the debris is a
40 manufactured object and if it is not a particle of S3000 or S4000 material.

1 Examples of waste that might be included in the S5000 Waste Summary Category are
2 asbestos-containing gloves, fire hoses, aprons, flooring tiles, pipe insulation, boiler
3 jackets, and laboratory tabletops. Also included are combustible debris constructed of
4 plastic, rubber, wood, paper, cloth, graphite, and biological materials. Examples of
5 graphite waste that would be included are crucibles, graphite components, and pure
6 graphite.

7 Wastes may be generated at the WIPP facility as a direct result of managing the TRU and TRU
8 mixed wastes received from the off-site generators. Such generated waste may occur in either
9 the WHB Unit or the Underground. For example, when TRU mixed wastes are received at the
10 WHB Unit, the CH or RH Package shipping containers and the TRU mixed waste containers are
11 checked for surface contamination. Under some circumstances,¹ if contamination is detected,
12 the shipping container and/or the TRU mixed waste containers will be decontaminated. In the
13 underground, waste may be generated as a result of radiation control procedures used during
14 monitoring activities. The waste generated from radiation control procedures will be assumed to
15 be TRU and/or TRU mixed waste. Throughout the remainder of this plan, this waste is referred
16 to as "derived waste." All such derived waste will be placed in the rooms in HWDUs along with
17 the TRU mixed waste for disposal.

18 F-1c Containers

19 The waste containers that will be used at the WIPP facility qualify as "containers," in accordance
20 with 20.4.1.101 NMAC (incorporating 40 CFR §260.10). That is, they are "portable devices in
21 which a material is stored, transported, treated, disposed of, or otherwise handled."

22 TRU mixed waste containers, containing off-site waste, will not be opened at the WIPP facility.
23 Derived waste containers are kept closed at all times unless waste is being added or removed.

24 Liquid waste, including "derived waste" containing liquids, will not be emplaced in the WIPP.
25 TRU mixed waste for emplacement in the WIPP shall contain as little residual liquid as is
26 reasonably achievable. All internal containers (e.g., bottles, cans, etc.) will be well-drained, but
27 may contain residual liquids. As a guideline, residual liquids in well-drained containers will be
28 restricted to approximately one percent of the volume of the internal container. In no case shall
29 the total liquid equal or exceed one volume percent of the waste container (i.e., drum, standard
30 waste box [SWB], ten-drum overpack, or canister).

31 Special requirements for ignitable, reactive, and incompatible waste are addressed in
32 20.4.1.500 NMAC (incorporating 40 CFR §§264.176 and 177). The RCRA Permit Treatment,
33 Storage, and Disposal Facility Waste Acceptance Criteria (**TSDF-WAC**) precludes ignitable,
34 reactive, or incompatible TRU mixed waste from being placed into storage or disposed of at
35 WIPP.

¹Typically contamination that is less than six square feet in area and less than 2000 disintegrations per minute (dpm) alpha or 20,000 dpm beta/gamma, may be decontaminated. Containers that exceed these thresholds will be returned to the point of origin for decontamination.

1 F-1d Description of Containers

2 CH TRU mixed waste containers will be either 55-gallon (gal) (208-liter (L)) drums singly or
3 arranged into seven (7)-packs, 85-gal (321-L) drums (used as singly or arranged into four (4)-
4 packs, 100-gal (379 L) drums singly or arranged into three (3)-packs, ten-drum overpacks
5 (**TDOP**), or 66.3 ft³ (1.88 m³) SWBs.

6 RH TRU mixed waste containers are either canisters or drums. Canisters will be loaded singly in
7 an RH-TRU 72-B cask and drums will be loaded in a CNS 10-160B cask. Drums in the CNS 10-
8 160B cask will be arranged singly or in drum carriage units containing up to five drums each.
9 Canisters and drums are described in Permit Attachment M1.

10 F-1e Description of Surface Hazardous Waste Management Units

11 The WHB is the surface facility where waste handling activities will take place. The WHB has a
12 total area of approximately 84,000 square feet (ft²) (7,804 square meters [m²]) of which
13 43,554 ft² (4,047 m²) are designated as the WHB Unit for TRU mixed waste management.
14 Within the WHB Unit, 26,151 ft² (2,430 m²) are designated for the waste handling and container
15 storage of CH TRU mixed waste and 17,403 ft² (1,617 m²) are designated for the handling and
16 storage of RH TRU mixed waste. These areas are being permitted as container storage units.
17 The concrete floors within the WHB Unit are sealed with an impermeable coating that has
18 excellent resistance to the chemicals in TRU mixed waste and, consequently, provide
19 secondary containment for TRU mixed waste. In addition, a Parking Area Unit south of the WHB
20 will be used for storage of waste in sealed shipping containers awaiting unloading. This area is
21 also being permitted as a container storage unit. The sealed shipping containers provide
22 secondary containment in this hazardous waste management unit (**HWMU**).

23 F-1e(1) CH Bay Operations

24 Once unloaded from the Contact-Handled Package, CH TRU mixed waste containers (7-packs
25 of 55-gal drums, 3-packs of 100-gal drums, 4-packs of 85-gal drums, SWBs, or TDOPs) are
26 placed in one of two positions on the facility pallet. The waste containers are stacked on the
27 facility pallets (one- or two-high, depending on weight considerations). The use of facility pallets
28 will elevate the waste at least 6 inches (in.) (15 centimeters [cm]) from the floor surface. Pallets
29 of waste will then be relocated to the northeast area of the CH bay for normal storage. This
30 storage area will be clearly marked to indicate the lateral limits of the storage area. This storage
31 area will have a maximum capacity of seven facility pallets of waste during normal operations.
32 These pallets will typically be staged in this area for a period of up to five days.

33 In addition, four Contact-Handled Packages, containing up to 640 ft³ of CH TRU waste in
34 containers, may occupy the staging positions at the TRUPACT-II Unloading Docks
35 (**TRUDOCK**).

36 Aisle space shall be maintained in all CH Bay waste storage areas. The aisle space shall be
37 adequate to allow unobstructed movement of fire response personnel, spill-control equipment,
38 and decontamination equipment that would be used in the event of an off-normal event. An aisle
39 space between facility and containment pallets will be maintained in all CH TRU mixed waste
40 storage areas.

1 F-1e(2) RH Complex Operations

2 Loaded RH TRU casks are received in the RH Bay of the WHB. The RH Bay is served by an
3 overhead bridge crane used for cask handling and maintenance operations. Storage in the RH
4 Bay occurs in the RH-TRU 72-B or CNS 10-160B casks. A maximum of two loaded casks may
5 be stored in the RH Bay and a maximum of one cask in the Cask Unloading Room may be
6 stored at one time. A minimum of 44 inches (1.1 m) will be maintained between loaded casks in
7 the RH Bay. The cask serves as secondary containment in the RH Bay for the RH TRU mixed
8 waste payload container. In addition, the RH Bay has a concrete floor.

9 Single RH TRU mixed waste canisters are unloaded from the RH-TRU 72-B casks in the
10 Transfer Cell of the RH Complex where they are transferred to facility casks. Drums of RH TRU
11 mixed waste will be transferred remotely from the CNS 10-160B cask, into the Hot Cell, and
12 loaded into a canister. Storage in the Hot Cell occurs in either drums or canisters. A maximum
13 of 12 55-gallon drums of RH TRU mixed waste and one 55-gallon drum of derived waste (94.9
14 ft³ (2.7 m³)) may be stored in the Hot Cell. Except for the derived waste drum, individual 55-
15 gallon drums may not be stored in the Hot Cell for more than 25 days. The Transfer Cell houses
16 the Transfer Cell Shuttle Car, which is used to facilitate transferring the canister to the facility
17 cask. Storage in this area typically occurs at the end of a shift or in an off-normal event that
18 results in the suspension of waste handling. A maximum of one canister (31.4 ft³ (0.89 m³)) may
19 be stored in the Transfer Cell in a shielded insert in the Transfer Cell Shuttle Car or in a RH-
20 TRU 72-B cask.

21 The Facility Cask Loading Room provides for transfer of a canister to the facility cask for
22 subsequent transfer to the waste hoist and to the Underground Hazardous Waste Disposal Unit.
23 The Facility Cask Loading Room also functions as an air lock between the waste shaft and the
24 Transfer Cell. Storage in this area typically occurs at the end of a shift or in an off-normal event
25 that results in the suspension of waste handling. A maximum of one canister (31.4 ft³ (0.89 m³))
26 may be stored in the Facility Cask in the Facility Cask Loading Room.

27 Derived waste will be stored in the RH Bay and in the Hot Cell.

28 F-1e(3) Parking Area Container Storage Unit (Parking Area Unit)

29 The area extending south from the WHB within the fenced enclosure identified as the Controlled
30 Area on Figure M1-2 is defined as the Parking Area Container Storage Unit. This area provides
31 storage for up to 6,734 ft³ (191 m³) of CH and/or RH TRU mixed waste contained in up to 40
32 loaded Contact-Handled Packages and 8 Remote-Handled Packages. Secondary containment
33 and protection of the waste containers from standing rainwater are provided by the
34 transportation containers. Up to 12 additional Contact-Handled Packages and four additional
35 Remote-Handled Packages may be stored in the Parking Area Surge Area so long as the
36 requirements of Permit Conditions III.A.2.c and III.A.2.d are met. No more than 50 Contact-
37 Handled and 12 Remote-Handled Packages may be stored in the Parking Area Storage Unit.

38 The safety criteria for Contact-Handled and Remote-Handled Packages require that they be
39 opened and vented at a frequency of at least once every 60 days. During normal operations,
40 Contact-Handled and Remote-Handled Packages will not require venting while located in the
41 Parking Area Unit. Any off-normal event which results in the need to store a waste container in

1 the Parking Area Unit for a period of time approaching fifty-nine (59) days shall be mitigated by
2 returning the shipment to the generator prior to the expiration of the 60 day NRC venting period
3 or by moving the Contact-Handled or Remote-Handled Package inside the WHB Unit where the
4 waste will be removed and placed in one of the permitted storage areas or in the underground
5 hazardous waste disposal unit.

6 F-1f Off-Normal Events

7 Off-normal events could interrupt normal operations in the waste management process line.
8 Shipments of waste from the generator sites will be stopped in any event which results in an
9 interruption to normal waste handling operations that exceeds three days.

10 F-1g Containment

11 The WHB Unit has concrete floors, which are sealed with a coating designed to resist all but the
12 strongest oxidizing agents. Such oxidizing agents do not meet the TSDf-WAC and will not be
13 accepted in TRU mixed waste at the WIPP facility. Therefore, TRU mixed wastes pose no
14 compatibility problems with respect to the WHB Unit floor.

15 During normal operations, the floor of the normal storage areas within the CH Bay and RH
16 Complex shall be visually inspected on a weekly basis to verify that it is in good condition and
17 free of obvious cracks and gaps. When a RH TRU mixed waste container is present in the RH
18 Complex, inspections will be conducted visually and/or using closed-circuit television cameras
19 in order to manage worker dose and minimize radiation exposures. Manual inspections of the
20 areas are performed at least annually during routine maintenance periods when waste is not
21 present.

22 Floor areas of the WHB used during off-normal events will be inspected prior to use and weekly
23 while in use. Containers located in the permitted storage areas shall be elevated from the
24 surface of the floor. Facility pallets provide at least 6 in (15 centimeters [cm]) of elevation from
25 the surface of the floor. TRU mixed waste containers that have been removed from Contact-
26 Handled or Remote-Handled Packages shall be stored at a designated storage area inside the
27 WHB so as to preclude exposure to the elements.

28 Secondary containment at permitted storage areas inside the WHB Unit shall be provided by the
29 floor. The Parking Area Unit and TRUDOCK storage area of the WHB Unit do not require
30 engineered secondary containment, since waste is not stored there unless it is protected by the
31 Contact-Handled or Remote-Handled Packaging. Floor drains, the fire suppression water
32 collection sump, and portable dikes, if needed, will provide containment for liquids that may be
33 generated by fire fighting. Sump capacities and locations are shown in Drawing 41-F-087-014.
34 Residual fire fighting liquids will be placed in containers and managed as described above.
35 Secondary containment at storage locations inside the RH Bay, Cask Unloading Room,
36 Transfer Cell, and Facility Cask Loading Room is provided by the cask or canisters that contain
37 drums of RH TRU mixed waste. In the Hot Cell, secondary containment is provided by the Hot
38 Cell subfloor. In addition, the RH Complex contains a 220-gallon (833-L) sump in the Hot Cell, a
39 11,400-gallon (43,152-L) sump in the RH Bay, and a 220-gallon (833-L) sump in the Transfer
40 Cell to collect any liquids.

1 F-2 Response Personnel

2 Persons qualified to act as the RCRA Emergency Coordinator, as required by 20.4.1.500 NMAC
3 (incorporating 40 CFR §264.55), are listed in Table F-2.

4 A RCRA Emergency Coordinator will be on-site at the WIPP facility 24 hours a day, seven days
5 a week, with the responsibility for coordinating emergency response measures. RCRA
6 Emergency Coordinators are listed in Table F-2, where four individuals have been designated
7 primary RCRA Emergency Coordinators. This is because the on-duty Facility Shift Manager
8 (**FSM**) is designated as the RCRA Emergency Coordinator. The four individuals shown serve as
9 FSM on a rotating shift basis.

10 Persons qualified to act as the RCRA Emergency Coordinator are thoroughly familiar with this
11 Contingency Plan, the TRU mixed waste and hazardous waste operations and activities at the
12 WIPP facility, the locations of TRU mixed waste and hazardous waste activities, the locations on
13 the site where hazardous materials are stored and used, and the locations of waste staging and
14 accumulation areas. They are familiar with the characteristics of hazardous substances, TRU
15 mixed waste and hazardous waste handled at the WIPP facility, the location of TRU mixed
16 waste and hazardous waste records within the WIPP facility, and the facility layout. In addition,
17 persons qualified to act as the RCRA Emergency Coordinator have the authority to commit the
18 necessary resources to implement this Contingency Plan. Figure F-4 outlines the RCRA
19 Emergency Coordinator's position relative to other organizations that provide support.

20 In addition to the RCRA Emergency Coordinator, the following individuals or groups have
21 specified responsibilities during any WIPP facility emergency:

- 22 ● Assistant Chief Office Warden (ACOW)—Persons assigned to take
23 accountability for sections of the site, and then reporting the accountability to the
24 Chief Office Warden.
- 25 ● Central Monitoring Room Operator (CMRO)—The on-shift operator responsible
26 for Central Monitoring Room (CMR) operations, including coordination of facility
27 communications. The facility log is maintained by the CMRO.
- 28 ● Chief Office Warden (COW)—A predesignated individual with responsibilities for
29 complete surface accountability at staging areas in the event of an evacuation.
30 The Chief Office Warden receives reports from the ACOWs.
- 31 ● Emergency Response Team (ERT)—Supplemental group trained to respond to
32 surface emergencies, to provide emergency first aid, and to respond to releases
33 of hazardous waste or hazardous material. ERT members are part of the WIPP
34 Supplemental Emergency Response Program.
- 35 ● Emergency Services Technician (EST)/ Fire Protection Technician
36 (FPT)—Regular employee whose job is that of full-time emergency responder.
37 During non-emergency conditions, the EST/FPT inspects facility fire suppression
38 systems and emergency equipment. The EST/FPT completes specific sections of

1 the "WIPP Hazardous Material Incident Report." Additional technical personnel
2 complete identified sections of the report.

- 3 ● Fire Brigade—The fire brigade is a team of five personnel who respond to site
4 emergencies. The team consists of an Incident Commander and four fire fighters.
5 The fire fighters are trained in accordance with NFPA Standards for Industrial
6 Fire Brigades (Fire Brigades that perform both advanced exterior and interior
7 structural fire fighting).
- 8 ● First Line Initial Response Team (FLIRT)—Supplemental primary responders in
9 the event of a general underground emergency for medical and hazardous
10 material response. The FLIRT also provides backup support for the ERT in the
11 event of a general surface-facility emergency. FLIRT members are part of the
12 WIPP Supplemental Emergency Response Program.
- 13 ● Mine Rescue Team (MRT)—Supplemental group responsible for underground
14 reentry and rescue after an emergency evacuation. The MRT responds in
15 accordance with 30 CFR Part 49 requirements. MRT members are part of the
16 WIPP Supplemental Emergency Response Program.
- 17 ● Office Warden—An individual assigned responsibility for assuring that personnel
18 are evacuated from his/her assigned area or building during evacuations. Office
19 Wardens maintain a list of all personnel in their specific area. This list is
20 compared with the physical presence of personnel who assemble at the staging
21 areas. The Office Wardens report area accountability to the ACOWs.
- 22 ● EOC Staff-The EOC consists of a minimum staff of three MOC management
23 positions (the Crisis Manager, a Safety Representative and an Operations
24 Representative) to activate the EOC. The full EOC Staff includes the Crisis
25 Manager, the Deputy Crisis Manager, a Safety Representative, an Operations
26 Representative and the EOC Coordinator. Additional technical and logistics
27 personnel will provide support as necessary. The EOC is activated by the FSM.
28 Since EOC staff are performing duties similar to their normal job functions and
29 providing support related to their area of expertise, no specific RCRA training is
30 required.

31 F-3 Implementation

32 The provisions of this Contingency Plan will be implemented immediately whenever there is an
33 emergency event (e.g., a fire, an explosion, or a natural occurrence that involves or threatens
34 hazardous or TRU mixed wastes or a release of hazardous substances, hazardous materials, or
35 hazardous wastes) that could threaten human health or the environment, or whenever the
36 potential for such an event exists as determined by the RCRA Emergency Coordinator, as
37 required under 20.4.1.500 NMAC (incorporating 40 CFR §264.51(b)). The following information
38 is utilized for categorization of events to determine implementation of the Contingency Plan:

- 39 1. Medical Emergencies (does not implement the Contingency Plan)

- 1 2. Non-emergency (does not implement the Contingency Plan)
- 2 a. Fire already out, did not involve any hazardous materials.
- 3 b. Spill or release involved materials excluded according to the SARA Title
- 4 III, Statute 42 U.S.C. 11021 (e). Such as:
- 5 1) Any substance present in the same form and concentration
- 6 as product packaged for distribution and use by the
- 7 general public. (Example: Cleaning solutions)
- 8 2) Any substance to the extent it is used in a laboratory under
- 9 the direct supervision of a technically qualified individual.
- 10 3) Petroleum, including crude oil or any fraction thereof,
- 11 which is not otherwise specifically listed or designated as a
- 12 hazardous substance by Comprehensive Environmental
- 13 Response, Compensation and Liability Act (**CERCLA**).
- 14 3. Incident Level I: According to the NFPA 471, Responding to Hazardous Materials
- 15 Incidents (See Table F-3). If the product(s) involved in the fire, explosion, spill or
- 16 leakage meets the following criteria, it will be classified as a Level I incident and
- 17 does not implement the Contingency Plan.
- 18 a. The product does not require a U.S. Department of Transportation (**DOT**)
- 19 placard, is a NFPA listed 0 or 1 for all categories, or is Other Regulated
- 20 Materials A, B, C, or D.
- 21 b. The fire is under control and the reactivity rating of the material is less
- 22 than a rating 2, indicating a low potential for subsequent explosion as the
- 23 hazardous material can be considered normally stable.
- 24 c. There was no release or the release can be confined with readily
- 25 available resources.
- 26 d. There is no life-threatening situation.
- 27 e. There is no potential environmental impact.
- 28 4. Incident Level II: According to NFPA 471, Responding to Hazardous Materials
- 29 Incidents, (See Table F-3). If the product(s) involved in the fire, explosion, spill or
- 30 leakage meets the following criteria, it will be classified as a Level II incident and
- 31 the Contingency Plan will be implemented by the RCRA Emergency Coordinator.
- 32 a. The product requires a DOT placard, is an NFPA 2 for any categories, or
- 33 is Environmental Protection Agency (**EPA**) regulated waste (Site-specific:
- 34 Table F-1 and TRU mixed waste) AND
- 35 b. The incident involves multiple packages.
- 36 c. There is potential for the fire to spread since the hazardous material's
- 37 flammability level (rating 2) is below 200 degrees Fahrenheit, or the
- 38 reactivity (rating 2) indicates that violent chemical changes are possible
- 39 and thus may be explosive.
- 40 d. The release may not be controllable without special resources.
- 41 e. The incident requires evacuation of a limited area for life safety.

- 1 f. The potential for environmental impact is limited to soil and air within
2 incident boundaries.
- 3 g. The container is damaged but able to contain the contents to allow
4 handling or transfer of product.
- 5 5. Incident Level III: According to NFPA 471, Responding to Hazardous Materials
6 Incidents. (See Table F-3) If the product(s) involved in the fire, explosion, spill or
7 leakage meet the following criteria, it will be classified as a Level III incident and
8 the Contingency Plan will be implemented by the RCRA Emergency Coordinator.
- 9 a. The product is a poison A (gas), an explosive A/B, organic peroxide,
10 flammable solid, material that is dangerous when wet, chlorine, fluorine,
11 anhydrous ammonia, NFPA 3 and 4 for any categories including special
12 hazards, EPA extremely hazardous substances, and cryogenics.
- 13 b. The site-specific container size for this incident level will be a tank truck.
- 14 c. There is potential for the fire to spread since the hazardous material's
15 flammability level (rating 3 or 4) is below 100 degrees Fahrenheit, or the
16 reactivity (rating 3 or 4) indicates that the material may explode.
- 17 d. The release may not be controlled even with special resources.
- 18 e. The incident requires mass evacuation of a large area for life safety.
- 19 f. Even though the NFPA guidelines for this incident level indicate that the
20 potential for environmental impact is severe, due to the site engineering
21 controls, the impact is contained within the HWMUs.
- 22 g. The container is damaged to such an extent that catastrophic rupture is
23 possible.

24 The above categories include fire situations, weather conditions, natural phenomena, and
25 explosions which will have to be evaluated to make an incident level determination. A Level II
26 (potential threat to human health in localized area, potential for moderate on-site environmental
27 impact) or Level III (potential threat to human health in a larger area, potential for severe
28 environmental impact) incident by definition is considered to be a potential threat to human
29 health or the environment and, therefore, is considered to be an emergency requiring activation
30 of the Contingency Plan.

31 F-4 Emergency Response Method

32 Methods that describe how and when the WIPP Contingency Plan will be implemented cover
33 the following 11 implementation areas:

- 34 1. Notification (Section F-4a)
- 35 2. Identification of hazardous materials (Section F-4b)
- 36 3. Assessment of the nature and extent of the emergency (Section F-4c)
- 37 4. Control, containment, and correction of the emergency (Section F-4d)

- 1 5. Prevention of recurrence or spread of fires, explosions, or releases (Section
2 F-4e)
- 3 6. Management and containment of released material and waste (Section F-4f)
- 4 7. Incompatible waste (Section F-4g)
- 5 8. Post-emergency facility and equipment maintenance and reporting (Section
6 F-4h)
- 7 9. Container spills and leakage (Section F-4i)
- 8 10. Tank spills and leakage (Section F-4j)
- 9 11. Surface impoundment spills and leakage (Section F-4k)

10 F-4a Notification

11 Notification requirements in the event of an emergency at a RCRA hazardous waste
12 management facility are defined by 20.4.1.500 NMAC (incorporating 40 CFR §§264.56(a) and
13 (d)). Necessary notifications in case of an emergency at the WIPP facility are described in this
14 section (Figure F-4a). Personnel at the WIPP facility are trained to respond to emergency
15 notifications.

16 F-4a(1) Initial Emergency Response and Alerting the RCRA Emergency Coordinator

17 The first person to become aware of an incident shall immediately report the situation to the
18 CMRO, and provide the following information, as appropriate:

- 19 ● Name and telephone number of the caller
- 20 ● Location of the incident and the caller
- 21 ● Time and type of incident
- 22 ● Severity of the incident
- 23 ● Magnitude of the incident
- 24 ● Cause of the incident
- 25 ● Assistance needed to deal with or control the incident
- 26 ● Areas or personnel affected by the incident

27 In addition to receiving incident reports, the CMRO, who is located in the Support Building
28 (Building 451) (Figure F-1), continuously monitors (24 hours a day) the status of mechanical,
29 electrical, and/or radiological conditions at selected points on the site, both above and below
30 ground. Alarms to indicate abnormal conditions are located throughout the WIPP facility. The
31 alarm(s) (e.g., fire, radiation) may be the first notification of an emergency situation received by
32 the CMRO. The CMRO monitors alarms, takes telephone calls and radio messages, and
33 initiates outgoing calls to emergency staff and outside agencies.

34 Once the CMRO is notified of a fire, explosion, or a release anywhere in the facility (either by
35 eyewitness or an alarm), the RCRA Emergency Coordinator is immediately notified. Once

1 notified, the RCRA Emergency Coordinator assumes responsibility for the management of
2 activities related to the assessment, abatement, and/or cleanup of the incident.

3 A RCRA Emergency Coordinator is on-site at all times and, therefore, can be reached at any
4 time via a two-way radio or over the public address (**PA**) and plectrons on-site. If the RCRA
5 Emergency Coordinator is unavailable or unable to perform these duties, a qualified alternate
6 RCRA Emergency Coordinator is available.

7 The EST/FPT is also notified in case of fire, explosion, or release. The RCRA Emergency
8 Coordinator, as incident commander, determines if supplemental emergency responders are
9 necessary. Notification of the ERT (surface) is made by using the ERT pagers and/or the public
10 announcement system. Notification of the FLIRT is by using the Mine Page Phone System. If
11 the MRT is needed the RCRA Emergency Coordinator will instruct the CMRO to make a PA
12 announcement for the MRT to assemble in the Mine Rescue Room, located in a predetermined
13 location.

14 Off-shift personnel may be notified using the on-call list, which is updated weekly by the
15 Permittees. The FSM/CMRO, each individual on the on-call list, and WIPP Security receive
16 copies of the on-call list. The CMRO may direct Security to make the notifications.

17 The response to an unplanned event will be performed in accordance with procedures based on
18 the applicable Federal, State, or local regulations and/or guidelines for that response. These
19 include the U.S. Mine Safety and Health Administration (**MSHA**); NMAC; CERCLA; Chapter 74,
20 Article 4B, New Mexico Statutes Annotated 1978, New Mexico Emergency Management Act;
21 and agreements between the Permittees and local authorities (Section F-6) for emergencies
22 throughout the WIPP facility.

23 After notification by the CMRO, the EST/FPT shall immediately investigate to determine
24 pertinent information relevant to the actual or potential threat posed to human health or the
25 environment. The information will include the location of release, type, and quantity of spilled or
26 released material (or potential for release due to fire, explosion, weather conditions, or other
27 naturally occurring phenomena), source, areal extent, and date and time of release. The
28 EST/FPT shall provide information for classification of the incident, according to the emergency
29 response guidelines, to the RCRA Emergency Coordinator. The RCRA Emergency Coordinator
30 then classifies the incident after evaluation of all pertinent information. This classification will
31 consider both direct and indirect effects of the release, fire, or explosion (e.g., the effects of any
32 toxic, irritating, or asphyxiating gases that are generated, or the effects of any hazardous
33 surface water run-off from water or chemical agents used to control fire and heat-induced
34 explosions).

35 When the RCRA Emergency Coordinator determines that an Incident Level II or III has
36 occurred, the Contingency Plan is implemented. The RCRA Emergency Coordinator then may
37 choose to activate the EOC for additional support (Figure F-4). If the RCRA Emergency
38 Coordinator determines that due to extenuating circumstances the potential to upgrade to an
39 incident Level II or III exists, the RCRA Emergency Coordinator also may activate the EOC. The
40 EOC will assist the RCRA Emergency Coordinator in mitigation of the incident with use of
41 communications equipment and technical expertise from any WIPP organization (see Section F-
42 4c).

1 The EOC staff will assess opportunities for coordination and the use of mutual-aid agreements
2 with local outside agencies making additional emergency personnel and equipment available
3 (Section F-6), as well as the use of specialized response teams available through various State
4 and Federal agencies. As a DOE-owned facility, the WIPP facility may use the resources
5 available from the Federal Response Plan, signed by 27 Federal departments and agencies in
6 April 1987, and developed under the authorities of the Earthquake Hazards Reduction Act of
7 1977 (42 U.S.C. 7701 et seq.) and amended by the Stafford Disaster Relief Act of 1988. Most
8 resources are available within 24 hours. The WIPP facility maintains its own emergency
9 response capabilities on-site. In addition to the supplemental emergency responders,
10 radiological control technicians, environmental sampling technicians, wildlife biologists, and
11 various other technical experts are available for use on an as-needed basis.

12 F-4a(2) Communication of Emergency Conditions to Facility Employees

13 Procedures for notifying facility personnel of emergencies depend upon the type of emergency.
14 Methods of notification are:

- 15 ● Local Fire Alarms

16 The local fire alarms sound a bell tone and may be activated automatically or
17 manually in the event of a fire.

- 18 ● Surface Evacuation Signal

19 The evacuation signal is a yelp² tone and is manually activated by the CMRO
20 when needed. The CMRO shall follow the evacuation signal with verbal
21 instructions and ensure the Site Notification System (i.e., the plectron) has been
22 activated.

- 23 ● Underground Evacuation Warning System

24 The evacuation signal is a yelp tone and flashing strobe light. In the event of an
25 evacuation signal, underground personnel will proceed to the nearest egress
26 hoist station (Section F-7b) to be apprised of the nature of the emergency and
27 the evacuation route to take. Underground personnel are trained to report to the
28 underground assembly areas and await further instruction if all power fails or if
29 ventilation stops. If evacuation of underground personnel is required, this will be
30 done using the backup electric generators and in accordance with the applicable
31 requirements of MSHA.

²The yelp tone increases from 500 to 1,000 hertz and drops to 500 hertz.

1 ● Contingency Evacuation Notification

2 If the primary warning system consisting of alarms and signals fails to operate
3 when activated (as in a total power outage and failure of the back-up power
4 systems), WIPP Security will be notified by the CMRO to initiate the contingency
5 evacuation plan. In this event Security officers will alert personnel to evacuate
6 the area and will check trailers, if possible, to ensure that personnel have been
7 alerted/evacuated.

8 WIPP facility personnel are trained and given instruction during General Employee Training to
9 recognize the various alarm signals and the significance of each alarm. WIPP facility employees
10 and site visitors are required to comply with directions from emergency personnel and alarm
11 system notifications and to follow instructions concerning emergency equipment, shutdown
12 procedures, and emergency evacuation routes and exits.

13 F-4a(3) Notification of Local, State, and Federal Authorities

14 If it is determined that the facility has had a fire, an explosion, a spill, or a release of hazardous
15 waste or hazardous waste constituents (included in 20.4.1.200 NMAC (incorporating 40 CFR §
16 261)) in the miscellaneous unit or TRU mixed waste handling areas, or an emergency resulting
17 in a release of a hazardous substance (included in 40 CFR §302.4 and §302.6 or the New
18 Mexico Emergency Management Act, §74-4B-3 and §74-4B-5) that could threaten human
19 health or the environment outside the facility, the RCRA Emergency Coordinator, after
20 consultation with the DOE as the owner of the facility, will assure that local authorities are
21 notified by telephone and/or radio, including:

- 22 ● Carlsbad Police Department (telephone number: [505] 885-2111) (or 911)
- 23 ● Carlsbad Fire Department (telephone number: [505] 885-2111) (or 911)
- 24 ● Eddy County Sheriff (telephone number: [505] 887-7551)
- 25 ● Hobbs Fire Department (telephone number: [505] 397-9265)

26 After local authorities are notified, the RCRA Emergency Coordinator will ensure notification of
27 the following:

- 28 ● New Mexico Environment Department (**NMED**)
29 Department of Public Safety
30 24-Hour Emergency Reporting Telephone Number: (505) 827-9329
31 FAX number: (505) 827-9368
- 32 ● Department of Public Safety WIPP Coordinator
33 Telephone Number: (505) 827-9221
34 FAX number: (505) 829-3434

- 1 ● Hazardous Materials Emergency Response, Chemical Safety Office, Department
2 of Public Safety, State Emergency Response Commission
3 Telephone number: (505) 476-9681
4 FAX number: (505) 476-9695

- 5 ● National Response Center
6 Telephone number: 1-800-424-8802
7 FAX number: (202) 479-7181

- 8 ● Local Emergency Planning Committee
9 Telephone number: (505) 885-3581
10 Fax number: (505) 628-3973

11 The first notification of public safety and regulatory agencies will include the following:

- 12 ● The name and address of the facility and the name and phone number of the
13 reporter

- 14 ● The type of incident (fire, explosion, or release)

- 15 ● The date and time of the incident

- 16 ● The type and quantity of material(s) involved, to the extent known

- 17 ● The exact location of the incident

- 18 ● The source of the incident

- 19 ● The extent of injuries, if any

- 20 ● Possible hazards to human health and the environment (air, soil, water, wildlife,
21 etc.) outside the facility

- 22 ● The name, address, and telephone number of the party in charge of or
23 responsible for the facility or activity associated with the incident

- 24 ● The name and the phone number of the RCRA Emergency Coordinator

- 25 ● The identity of any surface and/or groundwater involved or threatened and the
26 extent of actual and potential water pollution

- 27 ● The steps being taken or proposed to contain and clean up the material involved
28 in the incident

29 The RCRA Emergency Coordinator will also be available to advise the appropriate local, State,
30 or Federal officials on whether or not local areas should be evacuated.

1 F-4a(4) Notification of the General Public

2 Immediate notification of the general public through the public safety and emergency agencies
3 listed above will be made by, or under the direction of, the RCRA Emergency Coordinator
4 following an evaluation to determine if local adjacent areas need to be evacuated. This
5 evaluation will be made in consultation with the DOE who, as the owner of the facility, has
6 management responsibility for the land withdrawal area. DOE policy is to provide accurate and
7 timely information to the public by the most expeditious means possible concerning emergency
8 situations at the WIPP site that may affect off-site personnel, public health and safety, and/or
9 the environment. A DOE Carlsbad Field Office (**DOE/CBFO**) Management representative is
10 always on-call. This person is available by pager or telephone 24 hours a day.

11 A Hazards Assessment was conducted, which indicated no need for protective actions or
12 emergency action levels, as defined by the Permittees, for the facility. Therefore, no procedures
13 are in place for evacuation of the public. Procedures are in place for notification of the public by
14 radio, television, and newspapers for news items which might include notification of on-site
15 emergency situations. These procedures include a Public Affairs Coordinator in the EOC who
16 writes and transmits press releases to the DOE/CBFO office, where formal press conferences
17 are conducted.

18 F-4b Identification of Hazardous Materials

19 The identification of hazardous wastes, hazardous waste constituents, or hazardous materials
20 involved in a fire, an explosion, or a release to the environment is a necessary part of the
21 assessment of an incident, as described in 20.4.1.500 NMAC (incorporating 40 CFR
22 §264.56(b)). RCRA hazardous waste and hazardous substances and materials listed in 40 CFR
23 §302.4 and §302.6 or New Mexico Emergency Management Act, §74-4B-3 and §74-4B-5 and,
24 involved in any release at the WIPP facility will be identified. The identification of likely
25 hazardous materials at any location is enhanced because hazardous materials and hazardous
26 waste are only stored or managed in specified locations throughout the WIPP facility. An
27 attempt will be made to identify products involved by occupancy/location, container shape,
28 markings/color, placards/labels, United Nations/North America/Product Identification Number,
29 on-site technical experts, or field sampling. Further, the ES&H department maintains an updated
30 inventory of hazardous materials/substances that are brought on site, and a master MSDS
31 listing in the Safety and Emergency Services Facility, Building 452.

32 Sources of information available to identify the hazardous wastes, substances, or materials
33 involved in a fire, an explosion, or a release at the WIPP facility include operator/supervisor
34 knowledge of their work areas, materials used, and work activities underway; the WIPP Waste
35 Information System (**WWIS**), which identifies the location within the facility of emplaced TRU
36 mixed waste, including emplaced derived waste; and waste manifests and other waste
37 characterization information in the operating record. The WWIS also includes information on
38 wastes that are in the waste handling process. Also available are MSDSs for hazardous
39 material in the various user areas throughout the facility, waste acceptance records, and
40 materials inventories for buildings and operating groups at the WIPP facility. Information or data
41 from the derived waste accumulation areas, the hazardous waste staging area, satellite staging
42 areas, and nonregulated waste accumulation areas are included.

1 TRU mixed waste received by the WIPP facility during the Disposal Phase will be characterized
2 for hazardous constituents prior to receipt, and acceptable knowledge will be used to
3 characterize derived waste prior to emplacement.

4 Information required for identifying TRU mixed hazardous constituents in case of an incident is
5 readily available through the WWIS and the waste acceptance records. Waste accepted at
6 WIPP is already known to be compatible with all materials used to respond to an emergency. All
7 non-TRU mixed waste materials received on site, other than those listed in Table F-1, are in
8 such small quantities that no reaction could develop which would trigger an Incident Level II or
9 III response.

10 The RCRA Emergency Coordinator will have access to the WWIS through Operations, or
11 through the Facility Shift Manager's Office.

12 The RCRA Emergency Coordinator has access to the inventory lists and MSDSs in the Safety
13 and Emergency Services Facility at all times.

14 F-4c Assessment of the Nature and Extent of the Emergency

15 Once the required notifications have been made, the RCRA Emergency Coordinator will ensure
16 that the identity, exact source, amount, and areal extent of any released materials are
17 determined, as required under 20.4.1.500 NMAC (incorporating 40 CFR §264.56(b)). The
18 RCRA Emergency Coordinator will determine whether the occurrence constitutes an emergency
19 based on knowledge of the area and access to the waste identification/characterization
20 information described in Section F-4b. An emergency will require response by only trained
21 emergency response personnel. The RCRA Emergency Coordinator will be responsible for
22 responding to immediate and potential hazards, using the services of trained personnel to
23 determine: 1) the identity of hazardous wastes, hazardous waste constituents, and other
24 hazardous materials involved in a release, as described in Section F-4b; 2) whether or not a
25 release involved a reportable quantity of a hazardous substance; 3) the areal extent of a
26 release; 4) the exact source of a release; and 5) the potential hazards to human health or to the
27 environment.

28 After the materials involved in an emergency are identified, the specific information on the
29 associated hazards, appropriate personal protective equipment (**PPE**), decontamination, etc.,
30 will be obtained from MSDSs and from appropriate chemical reference materials at the same
31 location. These information sources may be accessed by the RCRA Emergency Coordinator or
32 through several WIPP facility organizations.

33 The emergency assessment requires determination of hazards involving evaluation of several
34 criteria, including:

- 35 ● Exposure: magnitude of actual or potential exposure to employees, the general
36 public, and the environment; duration of human and environmental exposure;
37 pathways of exposure

- 1 ● Toxicity: types of adverse health or environmental effects associated with
2 exposures; the relationship between the magnitude of exposure and adverse
3 effects

- 4 ● Reactivity: hazardous materials or hazardous wastes, which are not TRU mixed
5 wastes, involved in an incident will be assessed for reactivity through accessing
6 the MSDSs for the affected material and the recommended method(s) for
7 managing such waste

- 8 ● Uncertainties: considerations for undeterminable or future exposures; uncertain
9 or unknown health effects, including future health effects

10 F-4d Control, Containment, and Correction of the Emergency

11 The WIPP facility is required to control an emergency and to minimize the potential for the
12 occurrence, recurrence, or spread of releases due to the emergency situation, as described in
13 20.4.1.500 NMAC (incorporating 40 CFR §264.56 (e)). The WIPP Emergency Response
14 procedures utilize the incident mitigation guidelines in NFPA 471, Responding to Hazardous
15 Materials Incidents, with initial response priority being on control, and those actions necessary
16 to ensure confinement and containment (the first line of defense) in the early, critical stages of a
17 spill or leak. The RCRA Emergency Coordinator is responsible for stopping processes and
18 operations when necessary, and removing or isolating containers. TRU mixed waste will remain
19 within the WHB Unit, the Parking Area Unit, and the underground HWDU.

20 F-4d(1) All Emergencies

21 The WIPP Emergency Response procedures include, but are not limited to, the following
22 actions appropriate for control:

- 23 1. Isolate the area from unauthorized person by fences, barricades, warning signs,
24 or other security and site control precautions. Isolation and evacuation distances
25 vary, depending upon the chemical/product, fire, and weather situations.
- 26 2. Identify the chemical/product according to Section F-4b.
- 27 3. Drainage controls.
- 28 4. Stabilization of physical controls (such as dikes or impoundment[s]).
- 29 5. Capping of contaminated soils to reduce migration.
- 30 6. Using chemicals and other materials to retard the spread of the release or to
31 mitigate its effects.
- 32 7. Excavation, consolidation, removal, or disposal of contaminated soils.
- 33 8. Removal of drums, barrels, or tanks where it will reduce exposure risk during
34 situations such as fires.

35 If the facility stops operations in response to a fire, explosion, or release, the RCRA Emergency
36 Coordinator shall ensure continued monitoring for leaks, pressure buildup, gas generation, or
37 ruptures in valves, pipes, or other equipment, wherever appropriate. If operations continue,
38 personnel normally assigned to these tasks will continue.

1 Both natural and synthetic methods will be employed to limit the releases of hazardous
2 materials so that effective recovery and treatment can be accomplished with minimum additional
3 risk to human health or the environment. A combination of the above methods to achieve
4 protection of human health and the environment, with emphasis on two basic methods for
5 mitigation of hazardous materials incidents - Physical and Chemical (Tables F-4, F-5) mitigation,
6 will be used.

7 1. Physical methods of control involve any of several processes to reduce the area
8 of the spill/leak, or other release mechanism (such as fire suppression).

9 A. Absorption is the process in which materials hold liquids through the
10 process of wetting. Absorption is accompanied by an increase in the
11 volume of the sorbate/sorbent system through the process of swelling.
12 Some of the materials utilized in response to Level I incidents or Level II
13 incidents involving liquids will be absorbent sheets of polyolefin-type
14 fibers, spill control bucket materials (specifically for solvents,
15 neutralization, or for acids/caustics), and absorbent socks for general
16 liquids or oils.

17 B. Covering refers to a temporary form of mitigation for radioactive incidents
18 that will be utilized in response to Level II or Level III incidents involving
19 CH TRU mixed waste. These could include absorbent sheets, plastic, or
20 actual ambulance blankets.

21 C. Dikes or Diversions refer to the use of physical barriers to prevent or
22 reduce the quantity of liquid flowing into the environment. Dikes may be
23 soil or other barriers temporarily utilized to hold back the spill or leak.
24 Diversion refers to the methods used to physically change the direction of
25 the flow of the liquid. Absorbent socks or earth may be utilized as dikes or
26 diversions for all levels of incidents.

27 D. Overpacking is accomplished by the use of an oversized container.
28 Overpack containers will be compatible with the hazards of the materials
29 involved.

30 E. Plug and Patch refers to the use of compatible plugs and patches to
31 reduce or temporarily stop the flow of materials from small holes, rips,
32 tears, or gashes in containers. A Series "A" hazardous response kit
33 containing nonsparking equipment to control and plug leaks may be
34 utilized for response to all levels of incidents.

35 F. Transfer refers to the process of moving a liquid, gas, or some forms of
36 solids, either manually or by pump, from a leaking or damaged container.
37 Scoops, shovels, jugs, and pails as well as drum transfer pumps for
38 chemical and petroleum transfer are utilized as needed in response to all
39 levels of incidents.

1 G. Vapor Suppression refers to the reduction or elimination of vapors
2 emanating from a spilled or released material through the most efficient
3 method or application of specially designed agents such as an aqueous
4 foam blanket.

5 2. Chemical Methods of Mitigation

6 A. Neutralization is the process of applying acids or bases to a spill to form a
7 neutral salt. The application of solids for neutralizing can often result in
8 confinement of the spilled material. This would include using the
9 neutralizing adsorbents.

10 B. Solidification is the process whereby a hazardous liquid is added to
11 material such as an absorbent so that a solid material results.

12 The established procedures are based upon the incident level and a graded approach for
13 nonradioactive or CH TRU waste emergencies and initiated to:

- 14 1. Minimize contamination or contact (through PPE, etc.)
15 2. Limit migration of contaminants
16 3. Properly dispose of contaminated materials

17 For RH TRU mixed waste, the detection of contamination on or damage to a RH TRU mixed
18 waste canister or a facility canister may occur outside the Hot Cell during cask to cask transfer
19 of the canister or during loading of the Shielded Insert in the Transfer Cell. When such
20 contamination or damage is found, the Permittees have the option to decontaminate or return
21 the canister to the generator/storage site or another site for remediation. In the case of a
22 damaged facility canister, the Shielded Insert may be used as an overpack to facilitate further
23 management. Contamination may also be detected within the Hot Cell during the unloading of
24 the CNS 10-160B shipping cask. In this case, the Permittees may decontaminate the 55-gallon
25 drums or return them to the generator/storage site or another site for remediation. Spills or
26 releases that occur within the RH Complex or the underground as the result of RH TRU mixed
27 waste handling will be mitigated by using appropriate measures which may include the items
28 above.

29 F-4d(2) Fire

30 The incident level emergency response identified in Section F-3 includes fire/explosion
31 potential. WIPP fire response includes incipient, exterior structure fires, and internal structure
32 fires. The RCRA Emergency Coordinator can implement the Memoranda of Understanding
33 (**MOU**) for additional support.

34 The first option in mine fire response will be to apply mechanical methods to stop fires (e.g., cut
35 electrical power). The last option in mine fire response will be to reconfigure ventilation using
36 control doors associated with the underground ventilation system. The following actions are
37 implemented in the event of a fire:

- 38 1. All emergency response personnel at an incident will wear appropriate PPE.

- 1 2. Only fire extinguishing materials that are compatible with the materials involved
2 in the fire will be used to extinguish fires. Compatibility with materials involved in
3 a fire are determined by pre-fire plans, Emergency Response Guide Book (DOT,
4 1993), DOT labeling, and site-specific knowledge of the emergency response
5 personnel. Water and dry chemical materials have been determined to be
6 compatible with all components of the TRU mixed waste. Pre-fire plans for the
7 WHB are included in Figures F-10 and F-11.
8
9 Fires in areas of the WHB Unit should not propagate, due to limited amount of
10 combustibles, and the concrete and steel construction of the structures.
11 Administrative controls, such as landlord inspections and EST/FPT inspections,
12 help to insure good housekeeping is maintained. Combustible material and TRU
13 mixed waste will be isolated, if possible. Firewater drain trenches collect the
14 water and channel it into a sump. In areas not adjacent to the trenches, portable
15 absorbent dikes (pigs) will be used to retain as much as possible, until it can be
16 transferred to containers or sampled and analyzed for hazardous constituents.
- 17 3. If the fire spreads or increases in intensity, personnel will be directed to
18 evacuate.
- 19 4. The RCRA Emergency Coordinator will remain in contact with responding
20 personnel to advise them of the known hazards.
- 21 5. In order to ensure that storm drains and/or sewers do not receive potentially
22 hazardous runoff, dikes will be built around storm drains to control discharge as
23 needed. Collected waste will be sampled and analyzed for hazardous
24 constituents, before being discharged to evaporation ponds. There are two ponds
25 south of the security fence, opposite the WHB Unit, that will collect drainage from
26 the parking area. The rest of the site, inside the security fence, drains to the large
27 pond to the west. Samples will be taken from these ponds, after the emergency
28 has been abated, to determine any cleanup requirements. NMED will approve
29 any procedures associated with the sampling and analysis of the ponds.
- 30 6. The RCRA Emergency Coordinator maintains overall control of the emergency
31 and may accept and evaluate the advice of WIPP facility personnel and
32 emergency response organization members, but retains overall responsibility.
- 33 7. The RCRA Emergency Coordinator will be in overall control of WIPP facility
34 emergency response efforts until the emergency is terminated.
- 35 8. Materials involved in a fire can be identified in the following ways:
- 36 ● According to Section F-4b.
- 37 ● If the contents of the waste container cannot be determined based
38 on its location and the label is destroyed by fire, the material will
39 be treated as an unknown, evaluated for radiological
40 contamination, and analyzed according to methods in the EPA's
41

1 "Test Methods for Evaluating Solid Waste Physical/Chemical
2 Methods" (**SW-846**), Third Edition, after the fire has been
3 extinguished.

- 4 ● Airborne radioactivity samples may be obtained during a fire
5 involving radioactive materials, using portable and fixed air
6 samplers. Response personnel will be adequately protected from
7 airborne radioactivity by their PPE required for fire response.

8 9. Only materials compatible with the waste may be used for fire response.

9 10. When cleanup has proceeded to the point of finding no radionuclide activity, then
10 the "swipe" can be sent for analysis for hazardous constituents. The use of these
11 confirmation analyses is as follows:

- 12 ● For waste containers, once radiologically clean and free of any
13 visible evidence of hazardous waste spills on the container, it will
14 be placed in the underground without further action.
- 15 ● For area contamination, once the area is cleaned up and is shown
16 to be radiologically clean, it will be sampled for the presence of
17 hazardous waste residues (for further information see Section
18 F-4d, Emergency Termination Procedures).

19
20 11. Fire suppression materials used in response to incidents will be retained on-
21 scene, where an evaluation will be performed to determine appropriate recovery
22 and disposal methods.

23 F-4d(3) Explosion

24 The following actions will be implemented in the event that an explosion that involves or
25 threatens hazardous or TRU mixed waste or hazardous materials has occurred:

- 26 1. The area will be evacuated immediately.
- 27 2. The CMRO will immediately notify the appropriate emergency response
28 personnel and the RCRA Emergency Coordinator about the explosion.
- 29 3. Injured personnel will be treated and transported as necessary.
- 30 4. The RCRA Emergency Coordinator will remain in contact with responding
31 personnel to advise them of the known hazards involved and the degree and
32 location of the explosion and associated fires.
- 33 5. The RCRA Emergency Coordinator will be in command and may accept and
34 evaluate the advice of WIPP facility personnel and emergency response
35 organization members, but retains the overall responsibility. Selections of

1 methods and tactics of response are the responsibility of the Incident
2 Commander.

3 6. The RCRA Emergency Coordinator will be in overall control of WIPP facility
4 emergency response efforts until the emergency is terminated.

5 7. When cleanup has proceeded to the point of finding no radionuclide activity, then
6 samples may be taken for chemical analysis if there is visible evidence to
7 suspect additional hazardous waste residues. Chemical residues on floor
8 surfaces resulting from a hazardous waste explosion will be evaluated, sampled,
9 analyzed (if required), isolated, and returned to appropriate containers, and
10 surfaces will be cleaned using appropriate cleaners.

11 8. The RCRA Emergency Coordinator may shut down operational units (e.g.,
12 process equipment and ventilation equipment) that have been affected directly or
13 indirectly by the explosion. Once the areas have been determined safe for
14 reentry, processes may be reactivated.

15 F-4d(4) Spills

16 Protection of response personnel at a hazardous material incident is paramount. The primary
17 methods to protect personnel are time, distance, and shielding. If a Level II or III incident exists,
18 the RCRA Emergency Coordinator will implement the following actions:

- 19 1. The immediate area will be evacuated.
- 20 2. The RCRA Emergency Coordinator will review facility records to determine the
21 identity and chemical nature of released material.
- 22 3. Entry team procedures will be utilized, with special attention to the following:
- 23 ● Buddy system
 - 24 ● Appropriate PPE
 - 25 ● Backup rescue team
 - 26 ● Supplemental communication signals (hand signals and hand-light
27 signals)
 - 28 ● Monitoring equipment
 - 29 ● Exposure time limitations
- 30 4. If possible, the source of the release will be secured.
- 31 5. A dike to contain runoff may be built.
- 32 6. Emergency responders will ensure that storm drains and/or sewers do not
33 receive potentially hazardous runoff or spilled material. They may build dikes
34 around storm drains to control discharge.

- 1 7. Released wastes may be collected and contained by stabilizing or neutralizing
2 the spilled material, as appropriate, pouring an absorbent over the spilled
3 material, and sweeping or shoveling the absorbed material into drums or other
4 appropriate
5 containers. The absorbents have been determined to be compatible with all
6 components of the TRU mixed waste.
7
8 8. No TRU mixed waste that may be incompatible with the released material will be
9 managed in the affected area until cleanup procedures are complete.
- 10 9. The RCRA Emergency Coordinator will direct spill control, decontamination, and
11 termination procedures described below.

12 F-4d(5) Decontamination of Personnel

13 Decontamination of personnel with radioactive contamination is the responsibility of the
14 Radiological Control (**RC**) section. If a person is contaminated with radioactivity during a site
15 evacuation to the staging areas, the contaminated area will be covered before the person can
16 be moved (under escort by RC personnel) to the staging area. The RC personnel will ensure the
17 contaminated person remains segregated from other site personnel while under RC supervision.

18 In the event of an emergency that requires immediate evacuation of the area, the contamination
19 can be covered by any method warranted, given the circumstance (e.g., clean clothing wrapped
20 around the area). If the size of the radioactive contamination on the body is small and localized,
21 it can be covered with clothing (e.g., glove, shoe cover, coveralls). If the size of the radioactive
22 contamination on the body is large, it may be covered by dressing the individual in a full set of
23 Anti-Contamination clothing (coveralls, hood, gloves, shoe covers, etc.).

24 If time and location permit and the contamination is on the face, it will be decontaminated
25 immediately using a cloth moistened with tepid water (and a mild detergent, if necessary). If the
26 size of the radioactive contamination on the individual's body is small and localized, it will be
27 decontaminated using the same method as for the face, but after the individual has been
28 transferred to an area appropriate for conducting decontamination.

29 If the individual is transferred to the staging area prior to decontamination, he/she will be
30 decontaminated at the staging area using site procedures for personnel decontamination and
31 using decontamination supplies and equipment as appropriate for the extent and magnitude of
32 the contamination.

33 F-4d(6) Control of Spills or Leaking or Punctured Containers of CH and RH TRU Mixed Waste

34 In the event of spills or leaking or punctured containers of CH and RH TRU mixed waste, the
35 WIPP responds to three distinct phases: 1) the event, 2) the re-entry, and 3) the recovery.

36 During the event, the following immediate actions are completed: 1) stop work, 2) warn others
37 (notify CMR), 3) isolate the area, 4) minimize exposure, and 5) close off unfiltered ventilation.
38 These actions can take place simultaneously, as long as they are completed before proceeding
39 to the re-entry phase.

1 CH TRU Mixed Waste

2 Prior to the re-entry following an event involving containers of CH TRU mixed waste, a
3 Radiological Work Permit (**RWP**) is written for personnel to enter with protective clothing to
4 assess the conditions, take surveys and samples, and mitigate problems that could compound
5 the hazards in the area (cover up spilled material with plastic material sheeting and or any
6 approved fixatives such as polyvinyl alcohol (**PVA**) or paint, place equipment in a safe
7 configuration, etc.). During the re-entry phase, smears and air sample filters are taken and
8 counted. This information is used by cognizant managers, RC personnel, and As Low As
9 Reasonably Achievable (**ALARA**) Committee representatives to determine an appropriate
10 course of action to recover the area. A plan to decontaminate and recover affected areas and
11 equipment will be approved with a separate RWP written to establish the radiological controls
12 required for the recovery.

13 During the recovery phase, the plan will be executed to utilize the necessary resources to
14 conduct decontamination and/or overpacking operations as needed. The completion of this
15 phase will occur prior to returning the affected area and/or equipment to normal activities. The
16 recovery phase will include activities to minimize the spread of contamination to other areas.
17 These activities will involve placing the waste material in another container; vacuuming the
18 waste material; overpacking or plugging/patching the spilled, leaking, or punctured waste
19 container; and/or decontaminating the affected area(s). If an affected surface cannot be
20 decontaminated to releasable levels, it may be covered with a fixative coating and established
21 as a Fixed Contamination Area to prevent spread of contamination, or it may be removed using
22 heavy machinery and tools, packaged in approved waste containers, and emplaced in the
23 underground. Every reasonable effort to minimize the amount of derived waste, while providing
24 for the health and safety of personnel, will be made.

25 Should a breach of a CH TRU mixed waste container occur at the WIPP that results in
26 removable contamination exceeding the small area "spot" decontamination levels, the affected
27 container(s) (e.g., breached and contaminated) will be placed into an available overpack
28 container (e.g., 85-gal drum, SWB, TDOP), except that TDOP's will be decontaminated,
29 repaired/patched in accordance with 49 CFR §173 and §178 (e.g., 49 CFR §173.28), or
30 returned to the generator. The decontamination of equipment and the overpacking of
31 contaminated/damaged waste containers will be performed in the vicinity of the incident. For
32 example, under normal operations CH TRU mixed waste will be handled only in the areas of the
33 WHB Unit. Therefore, it is within these same areas that decontamination and/or overpacking
34 operations would occur. By eliminating the transport of contaminated equipment to other areas
35 for decontamination or overpacking, the risk of spreading contamination is reduced.

36 Equipment used during a spill cleanup or CH TRU mixed waste overpacking operation could
37 include: cloths, brushes, scoops, absorbents, squeegees, tape, bags, pails, slings, hand tools,
38 and others as needed for a given incident.

39 At the underground emplacement room, salt contaminated by a spill of CH TRU mixed waste
40 would be either covered or cleaned up, depending on location, extent, and spilled material, due
41 to potential radioactive contamination spread via the salt dust. The contaminated salt would be
42 covered to isolate it from the workers, and the stacking of waste containers would resume or

1 would be removed and packaged as site-derived waste using applicable site procedures for
2 decontaminating surfaces.

3 The decontamination methods will initially involve wiping down structures, equipment, and other
4 containers in the area with absorbent cloths moistened with tepid water. Surveys of these
5 structures will take place and the need to continue decontamination activities will be
6 established. If further decontamination is required, nonhazardous decontaminating agents, such
7 as Liquinox®, Simple Green®, Windex®, citric acid, Bartlett Strip Coat®, and high pressure CO₂
8 will be used to prevent generating CH TRU mixed waste.

9 RWPs and other administrative controls provide protective measures to help ensure that new
10 hazardous constituents will not be added during decontamination activities.

11 Certain structures and/or equipment may be disassembled to facilitate decontamination or may
12 be placed directly into a derived waste container. Items used in the spill cleanup and
13 decontamination operations (e.g., swipes, tools, PPE, etc.) may also be placed into a derived
14 waste container.

15 When decontamination is deemed by the recovery team to be complete, RC personnel will
16 conduct one final, intensive radcon survey of the area and components in the area to release it
17 for uncontrolled use. The free release criteria for items, equipment, and areas is < 20 dpm/100
18 cm² for alpha radioactivity and < 200 dpm/100 cm² for beta-gamma radioactivity. Personnel will
19 then perform hazardous material sampling after decontamination efforts are complete to verify
20 the removal of hazardous waste substances. After cleanup is complete, facility personnel will
21 complete an inspection and include the details of the spill and cleanup in the log.

22 RH TRU Mixed Waste

23 For RH TRU mixed waste, the detection of contamination on or damage to a RH TRU mixed
24 waste canister or a facility canister may occur outside the Hot Cell during cask to cask transfer
25 of the canister or during loading of the Shielded Insert in the Transfer Cell. When such
26 contamination or damage is found, the Permittees have the option to decontaminate or return
27 the canister to the generator/storage site or another site for remediation. In the case of a
28 damaged facility canister, the Shielded Insert may be used as an overpack to facilitate further
29 management. Contamination may also be detected within the Hot Cell during the unloading of
30 the CNS 10-160B shipping cask. In this case, the Permittees may decontaminate the 55-gallon
31 drums or return them to the generator/storage site or another site for remediation. Spills or
32 releases that occur within the RH Complex or the underground as the result of RH TRU mixed
33 waste handling will be mitigated by using the following measures, as appropriate:

34 During the re-entry phase, an evaluation of the incident, including the nature of the release,
35 amount, location, and other appropriate factors, will be performed. A RWP will be written and
36 approved prior to personnel entering the Hot Cell with the appropriate PPE to further assess the
37 situation, perform surveys and take samples, and, if possible, mitigate problems that could
38 compound the hazards in the area. Based on the results of the evaluation, a determination will
39 be made by the RCRA Emergency Coordinator, with input from the cognizant managers,
40 radiological control personnel, and ALARA Committee representatives whether to implement the
41 Contingency Plan and to determine the appropriate course of action to recover from the event.

1 An action response plan to decontaminate and recover affected areas and equipment, together
2 with an RWP establishing the radiological controls required for the recovery will be developed
3 and approved.

4 Should a breach of a RH TRU mixed waste container occur in the Hot Cell that results in
5 removable contamination exceeding the small area "spot" decontamination levels, the affected
6 container(s) (e.g., breached and contaminated) will be placed into a canister and processed for
7 disposal. The decontamination of equipment, cleanup of spilled material and the overpacking of
8 contaminated/damaged waste containers will be performed in the vicinity of the incident. For
9 example, under normal operations RH TRU mixed waste in 55-gallon drums will be handled
10 only in the Hot Cell. Therefore, it is within this area that decontamination and/or overpacking
11 operations would occur. By eliminating the transport of contaminated equipment to other areas
12 for decontamination or overpacking, the risk of spreading contamination is reduced.
13 Contaminated materials for the cleanup and overpacking of a breached RH TRU mixed waste
14 container may be managed as CH TRU mixed waste, depending on the surface dose rate.

15 Equipment used during a spill cleanup or RH TRU mixed waste overpacking operation could
16 include: cloths, brushes, scoops, absorbents, squeegees, tape, bags, pails, slings, hand tools,
17 and other equipment as needed for a given incident.

18 The decontamination methods may initially involve wiping down structures, equipment, and
19 other containers in the area with absorbent cloths moistened with tepid water. Surveys of these
20 structures will take place and the need to continue decontamination activities will be
21 established. If further decontamination is required, nonhazardous decontaminating agents, such
22 as Liquinox®, Simple Green®, Windex®, citric acid, Bartlett Strip Coat®, and high pressure CO₂
23 will be used to prevent generating CH TRU mixed waste.

24 RWPs and other administrative controls provide protective measures to help ensure that new
25 hazardous constituents will not be added during decontamination activities.

26 Certain structures and/or equipment within the Hot Cell may be disassembled to facilitate
27 decontamination or may be placed directly into a derived waste container. Items used in the spill
28 cleanup and decontamination operations (e.g., swipes, tools, PPE, etc.) may also be placed into
29 a derived waste container.

30 When decontamination of the Hot Cell is deemed by the recovery team to be complete, RC
31 personnel will conduct one final, intensive radcon survey of the area and components in the
32 area to release it for continued use. The free release criteria for items and equipment that will
33 be released for uncontrolled use are < 20 dpm/100 cm² for alpha radioactivity and < 200
34 dpm/100 cm² for beta-gamma radioactivity. Personnel will then perform hazardous material
35 sampling after decontamination efforts are complete to confirm the removal of hazardous waste
36 substances. After cleanup is complete, facility personnel will complete an inspection and include
37 the details of the spill and cleanup in the log. The recovery phase must be completed before the
38 affected area and/or equipment are returned to service.

1 F-4d(7) Natural Emergencies

2 After a natural emergency (earthquake, flood, lightning strike, etc.) that involves hazardous
3 waste or hazardous materials, the FSM will ensure the following actions are taken:

- 4 1. Inspect containers which have not been disposed and containment for signs of
5 leakage or damage. Inspect areas where containers are stored looking for
6 leaking containers and for deterioration of containers and the containment
7 system.
- 8 2. Inspect affected equipment or areas associated with hazardous waste
9 management activities for proper operating mode in accordance with site
10 procedures and manually check to ensure automatic and alarmed features on the
11 units are working.
- 12 3. Inspect affected equipment or areas within the HWMUs in accordance with site
13 procedures for damage.
- 14 4. Inspect electrical boards and overhead electrical lines for damage.
- 15 5. Check container areas for signs of leakage or damage to drums and containers.
- 16 6. Check affected buildings and fencing directly related to hazardous waste
17 management activities for damage.
- 18 7. Conduct a general survey of the site looking for signs of land movement, etc.
- 19 8. Take any necessary corrective measures, however temporary, to rectify potential
20 or real problems.
- 21 9. Record inspection results.

22 F-4d(8) Roof Fall

23 Roof fall is not expected to affect RH TRU mixed waste because it is emplaced in the rib of the
24 disposal room and not subject to impact from a roof fall. The following incident description and
25 mitigation apply to CH TRU mixed waste.

26 The WIPP underground is routinely evaluated for stability and safety of the underground
27 openings. These evaluations can be as simple as the MSHA required visual checks by
28 personnel working in the area or as extensive as the expert review of the roof support system
29 for Room 1 Panel 1 conducted in 1991. An in-depth evaluation of all of the accessible
30 underground is performed on an annual basis as part of the formal ground control operating
31 plans. Weekly visual and sounding inspections are performed by the Permittees. More frequent
32 inspections and evaluations are performed in areas where roof or ribs are in need of
33 evaluations, based on visual observations, analysis of rock deformation data, excavation effects
34 program data acquired from observation holes, and support system performance.

1 This process applies not only to the waste disposal rooms but to the entire WIPP underground.
2 Prior to waste emplacement, stability of each room will be evaluated. This evaluation will
3 concentrate on the age and current performance of the installed support systems (if any) and
4 the rate of roof beam expansion based on data from installed instrumentation. The roof support
5 system's performance and surety, to provide the support necessary for the required time will be
6 addressed. Criteria used will include design parameters such as the amount of load, the
7 deformation of the installed system, and the number and type of component failures observed, if
8 any. Geotechnical criteria will include parameters such as the type and quantity of fracturing,
9 roof beam expansion rates, and future ground performance based on a predictive model.

10 Should the evaluation results indicate that remedial actions are necessary prior to placement of
11 waste, experiences at the WIPP indicate that rebolting or installing supplemental support can
12 extend the safe life of a room for several years.

13 After waste emplacement commences, geomechanical monitoring will continue with monitors
14 that are tied into a computer network program. The readings obtained will provide information
15 needed for the roof beam stability assessment. Visual observations of the ground and the
16 support systems will also continue in all accessible areas. Based on the experiences from the
17 Site and Preliminary Design Validation test rooms, it has been proven that any developing
18 instability will be detected through monitoring. Multiple measures to deal with the observed
19 conditions can be implemented months before an event to mitigate any risk associated with a
20 roof fall in the storage room or any affected area within the mine. At a minimum, the affected
21 area will be isolated and withdrawn from ventilation flow. Isolation operations will utilize current
22 available methods, materials, and equipment.

23 Ground control conditions which could result in a fall can be divided into two scenarios: The first
24 consists of spalling (falling) of individual small and localized rock falling on waste containers.

25 By definition, they can be considered insignificant as no damage to the drums can occur. The
26 second consists of an entire section of roof falling on multiple stacks of waste containers. Each
27 of these scenarios is discussed below.

28 Spalling-of-Ground Scenario

29 The maximum distance between the room roof and a container of waste is 10 ft. Waste
30 containers are designed to withstand impact loads of at least 1,000 pounds (lbs)
31 dropped from a height of 6 ft. flat or 450 lbs dropped on a circumferential edge from a
32 height of 4 ft. Both of which correspond to an allowable impact stress of 25,450 pounds
33 per square inch (psi). Rocks from spalling are small and would not be of sufficient weight
34 when striking a drum from a 10 ft vertical height to cause an impact stress of more than
35 25,450 psi. Taking into account the falling distance, average weight, and the typical
36 shape of the salt rock, the conclusion is that puncturing a drum by spalling is non-
37 credible.

1 Fall-of-Ground Scenario

2 Fall-of-ground occurs when a large section of roof beam falls onto the waste containers.
3 As previously discussed, the possibility of this occurring in an active room is remote, due
4 to continuous monitoring and engineered roof support systems.

5 The following actions have been developed and will be taken by the RCRA Emergency
6 Coordinator should a rock fall occur in an active waste emplacement area of the repository:

7 Spalling-of-Ground Actions

- 8 1. Determine whether the roof conditions allow for safe entry and if the waste
9 container or containers in question are accessible.

10 The process used to determine if a roof condition of a room will allow for safe
11 entry is the same as the ground control inspection process used for inspection of
12 the ground conditions and roof bolt integrity. The inspection will begin at a safe
13 and sound roof starting point and consist of visual inspections of roof bolts, roof,
14 and rib areas for missing or damaged bolts; deformed roof bolt plates; or roof and
15 rib cracks, fractures, or separations. If during the visual inspection suspicious
16 roof bolts, roof, or ribs are found, then operators will proceed with sounding the
17 area in question with a scaling bar for loose roof bolts, bad roof, or ribs (loose
18 roof bolts will not ring when sounded). Bad roof or ribs will have a drummy,
19 hollow, or un-solid sound when struck with the scaling bar. When this operation is
20 performed, a safe avenue for retreat is always maintained. Also maintained is a
21 position such that an unexpected event will not place personnel in a position
22 where the scaling bar or material being scaled could fall on personnel. If the
23 inspection reveals ground that cannot be safely scaled manually or with the
24 available mining equipment, the affected area, up to and including the entire
25 room, will be barricaded and removed from ventilation flow.

26 The criteria used to determine whether a waste container is accessible is based
27 on the location of the container, the amount of waste in the room, and the
28 expense of reaching the waste container safely versus the expense of
29 abandonment of the room. For example, if the room is 95% filled and spalling-of-
30 ground punctured a waste container at or near the exit of the room, the decision
31 to isolate the room and move waste emplacement activities to the next room
32 would be prudent.

- 33 2. Restrict access in ventilation flow path downstream of the incident.
- 34 3. Restrict ventilation to the affected room to ensure that there is no spread of
35 contamination that may have been released. Survey for contamination and
36 establish the boundaries.
- 37 4. Inspect accessible and affected containers and containment for signs of leakage
38 or damage.

- 1 5. Cover the spill area with material such as plastic or fabric sheets or PVA, in a
2 way that would safely isolate the area.
- 3 6. Determine if the covered spill area safely allows for continued waste disposal
4 operations or whether further cleanup is required. If further cleanup is required,
5 provide with cleanup methods described below. Note: Cleaning may not be
6 required since this is the permitted disposal area.
- 7 7. Inspect any affected equipment (vehicles, handling equipment, and
8 communication and alarm equipment) for proper function.
- 9 8. Repackage spilled waste and repackage, plug, or patch breached waste
10 containers into 55 or 85-gallon drums, SWBs, or TDOPs, depending on volume.
11 Temporarily locate overpack waste containers in an adjacent room. Remove only
12 those intact waste containers necessary to clear the area for decontamination.
- 13 9. At the underground emplacement room, salt contaminated by a spill of TRU
14 mixed waste will be covered with materials such as salt, plastic or fabric sheets
15 or PVA to isolate it from the workers or removed and packaged as site derived
16 waste in accordance with site procedures for decontaminating surfaces.
- 17 10. Manage the radioactive debris as derived waste.
- 18 11. Characterize containers of waste based on the waste containers that were
19 damaged.
- 20 12. Replace the removed and derived waste containers into the waste stack as
21 appropriate and update the WWIS.
- 22 13. Document activities and record results.

23 Fall-of-Ground Actions

- 24 1. Restrict access in ventilation flow path downstream of the incident.
- 25 2. Restrict the room from ventilation flow by closing bulkhead regulators.
- 26 3. Survey for radiological contamination and establish the boundary for a
27 Radiological Buffer Area.
- 28 4. Install barricade devices to remove access.
- 29 5. At the underground emplacement room, salt contaminated by a spill of TRU
30 mixed waste will be covered with materials such as salt, plastic or fabric sheets,
31 or PVA to isolate it from the worker or removed and packaged as site derived
32 waste using damp rags, hand tools, and HEPA filtered vacuums.

33 The criteria used to determine whether to close the entire panel or just the
34 affected room of waste containers would include the location of the roof fall and

1 the stability of the unaffected roof area in the panel. Techniques to determine the
2 stability would be the same as previously described in this section.

3 F-4d(9) Structural Integrity Emergencies

4 In the event of a WIPP facility emergency involving underground structural integrity, the situation
5 will be handled as a natural emergency. Monitoring and inspection procedures ensure the
6 safety and integrity of the WIPP facility underground.

7 F-4d(10) Emergency Termination Procedures

8 For the transition from emergency phase to cleanup phase, the following items will be complete:

- 9 ● Emergency scene will be stable
- 10 ● Release of hazardous substance will be stopped
- 11 ● Reaction of hazardous substance will be controlled
- 12 ● The released hazardous substance will be contained within a localized and
13 manageable area
- 14 ● The area of contamination will be adequately secure from unauthorized entry

15 At every incident involving hazardous materials, there is a possibility that response personnel
16 and their equipment will become contaminated. Emergency response personnel have
17 procedures to minimize contamination or contact, and to properly dispose of contaminated
18 materials.

19 For nonemergencies and Incident Level I emergencies, the following methods of
20 decontamination are available for personnel, environment, and/or equipment according to
21 emergency response procedures:

- 22 ● Absorption
- 23 ● Adsorption
- 24 ● Chemical degradation
- 25 ● Dilution
- 26 ● Disposal
- 27 ● Isolation
- 28 ● Neutralization
- 29 ● Solidification

1 Any necessary verification of air, soil, or water samples will be directed by the RCRA
2 Emergency Coordinator. Immediately after an emergency, the RCRA Emergency Coordinator
3 will provide for treating, storing, or disposing of recovered waste, contaminated soil or surface
4 water, or any other material that results from a release, fire, or explosion at the facility in
5 accordance with standard operating procedures.

6 For Level II and III incidents after the emergency itself is controlled and contained, the RCRA
7 Emergency Coordinator will be responsible for the development and implementation of an
8 incident-specific decontamination plan.

9 PPE will be decontaminated or disposed according to procedure before it is returned to its
10 storage location.

11 As part of the facility's defense-in-depth approach, equipment will be assumed to be
12 contaminated after each hazardous material response and a thorough check for radioactive
13 contamination will be conducted. If contamination is found, a technically sound decontamination
14 process will be followed. Many types of equipment are difficult to decontaminate and may have
15 to be discarded as hazardous or derived waste. Whenever possible, pieces of equipment will be
16 disposable or made of nonporous material.

17 If radioactive contamination is detected on equipment or on structures, it will be assumed that
18 hazardous constituents may also be present. Radiological surveys to determine whether a
19 potential release of hazardous constituents has occurred (Permit Attachment I3) will be used
20 along with other techniques as a detection method to determine when decontamination is
21 required. Radiological cleanup standards will be used to determine the effectiveness of
22 decontamination efforts. To provide verification of the effectiveness of the removal of hazardous
23 waste constituents, once a contaminated surface is demonstrated to be radiologically clean, the
24 "swipe" can be sent for analysis for hazardous constituents. The use of these confirmation
25 analyses is as follows:

26 For waste containers, the analyses become documentation of the condition of the
27 container at the time of emplacement. These containers will be placed in the
28 underground without further action, once the radiological contamination is removed,
29 unless there is visible evidence of hazardous waste spills or hazardous waste on the
30 container and this contamination is considered likely to be released prior to
31 emplacement in the underground. In no case shall these containers contain a total liquid
32 content equal to, or which exceeds, one volume percent of the container.

33 For area contamination, once the area is cleaned up and is shown to be radiologically
34 clean, it will be sampled for the presence of hazardous waste residues. If the area is
35 large, a sampling plan will be developed. The sampling plan will be approved by the
36 NMED before it is implemented. If the area is small, swipes will be used. If the results of
37 the analysis show that residual contamination remains, a decision will be made whether
38 further cleaning will be beneficial or whether final clean up will be deferred until closure.
39 Appropriate notations will be entered into the operating record to assure proper
40 consideration of formerly contaminated areas at the time of closure. Furthermore,
41 measures such as covering, barricading, and/or placarding will be used as needed to
42 mark areas that remain contaminated.

1 For all Contingency Plan emergency responses, the RCRA Emergency Coordinator will ensure,
2 in keeping with standard operating procedures, that, in the affected area(s) of the facility:

- 3 ● No waste that may be incompatible with the released material is treated, stored,
4 or disposed of until cleanup procedures are completed
- 5 ● All emergency equipment listed in the Contingency Plan is cleaned and fit for its
6 intended use, or replaced before operations are resumed

7 F-4e Prevention of Recurrence or Spread of Fires, Explosions, or Releases

8 During an emergency, the RCRA Emergency Coordinator will ensure that reasonable measures
9 are taken so that fires, explosions, and releases do not occur, recur, or spread to TRU mixed
10 waste or other hazardous materials at the facility, as required under 20.4.1.500 NMAC
11 (incorporating 40 CFR §§264.56(e) and (f)). These measures include:

- 12 ● Stopping processes and operations.
- 13 ● Collecting and containing released wastes and materials.
- 14 ● Removing or isolating containers of waste or hazardous substances posing a
15 threat.
- 16 ● Ensuring that wastes managed during an emergency are handled, stored, or
17 treated with due consideration for compatibility with other wastes and materials
18 on site and with containers utilized (Section F-4h).
- 19 ● Restricting personnel not needed for response activities from the scene of the
20 incident.
- 21 ● Evacuating the area.
- 22 ● Curtailing nonessential activities in the area.
- 23 ● Conducting preliminary inspections of adjacent facilities and equipment to assess
24 damage.
- 25 ● Overpacking and/or removing damaged containers/drums from affected areas.
26 Damaged equipment and facilities will be repaired as appropriate.
- 27 ● Constructing, monitoring, and reinforcing temporary dikes as needed.
- 28 ● Maintaining fire equipment on standby at the incident site in cases where
29 ignitable liquids have been or may be released and ensuring that all ignition
30 sources are kept out of the area. Ignitable liquids will be segregated, contained,
31 confined, diluted, or otherwise controlled to preclude inadvertent explosion or
32 detonation.

1 No operation that has been shut down in response to the incident will be restarted until
2 authorized by the RCRA Emergency Coordinator. Sections F-4g, Incompatible Waste, and F-4h,
3 Post-Emergency Facility and Equipment Maintenance and Reporting, address specific issues
4 related to decreasing the possibility of a recurrence or spread of a release, a fire, or an
5 explosion.

6 After resolution of the incident, a Root Cause Analysis will be conducted to review all Level II
7 and Level III incidents for determination of cause, and the corrective action plan to prevent
8 recurrence.

9 F-4f Management and Containment of Released Material and Waste

10 Once initial release or spill containment has been completed, the RCRA Emergency
11 Coordinator will ensure that recovered hazardous materials and waste are properly stored
12 and/or disposed, as required by 20.4.1.500 NMAC (incorporating 40 CFR §264.56(g)). For spills
13 of liquid, the perimeter of the spill will be diked with an absorbent material that is compatible
14 with the material(s) released. Free-standing liquid will be transferred to a marked compatible
15 container. The remaining liquid will be absorbed with an absorbent material and swept or
16 scooped into a marked compatible container. Spill residue will be removed. Spills of dry material
17 will be swept or shoveled into a labeled compatible recovery container. Material recovered from
18 the spill will be transferred to clean containers or tanks or to containers or tanks that have held a
19 compatible material. All containers will meet DOT specifications for shipping the wastes, and
20 materials will be recovered.

21 Nonradioactive hazardous waste resulting from the cleanup of a fire, an explosion, or a release
22 involving a nonradioactive hazardous waste or hazardous substance at the WIPP facility will be
23 contained and managed as a hazardous waste until such time as the waste is disposed of, or
24 determined to be nonhazardous, as defined in 20.4.1.200 NMAC (incorporating 40 CFR §261)
25 Subparts C and D. In most cases, hazardous materials inventories for the various buildings and
26 areas at the facility will allow a determination of the hazardous materials present in any cleanup
27 of a release or of the residues from an emergency condition. (The quantities of such spills are
28 so small, it is not likely to trigger an Incident Level II or III.) When necessary samples of the
29 waste will be collected and analyzed to determine the presence of any hazardous
30 characteristics and/or hazardous waste constituents; this information is needed to evaluate
31 disposal options. EPA-approved sampling and analytical methods will be utilized. Hazardous
32 wastes will be transferred to the Hazardous Waste Staging Area. The staging area is used to
33 store hazardous waste awaiting transfer to an off-site treatment or disposal facility in
34 accordance with applicable regulations (e.g., 20.4.1 NMAC and DOT regulations). The
35 Hazardous Waste Staging Area for nonradioactive hazardous waste is Buildings 474A and
36 474B, as shown in Figure F-1. Nonradioactive hazardous wastes will be shipped off-site for
37 disposal at a RCRA permitted disposal facility.

38 Under normal operations, administrative controls will be implemented to ensure that hazardous
39 materials and incompatible materials will not be introduced to the radioactive materials area
40 during TRU mixed waste handling operations. Examples of administrative controls include
41 restricting the waste received in the TRU mixed waste management area(s) to TRU mixed
42 waste properly manifested from the generator sites and ensuring that materials used in these
43 area(s) are restricted to only those that have previously been determined to be compatible with

1 the TRU mixed waste. The RCRA Emergency Coordinator will have access to building design
2 information and information on specific equipment used within an area upon which to base a
3 determination of the compatibility of materials with the area. If necessary, the RCRA Emergency
4 Coordinator will use EPA-600/2-80-076, "A Method for Determining the Compatibility of
5 Hazardous Waste," (EPA, 1980) for making compatibility determinations. Waste resulting from
6 the cleanup of a fire, explosion, or release in the miscellaneous unit, the CH TRU mixed waste
7 handling areas, or the RH Complex will be considered derived from the received TRU mixed
8 waste and may be treated and managed as CH TRU mixed waste depending on the surface
9 dose rate.

10 In the event of a prolonged cessation of TRU mixed waste handling operations, TRU mixed
11 waste can be placed in areas of the WHB Unit that are available for such contingencies. These
12 areas and the TRU mixed waste containers in them would be located so that adequate aisle
13 space would be maintained for unobstructed movement of personnel and equipment in an
14 emergency. Permit Attachments M, M1, and M2 describe the HWMUs in detail, including the
15 facility description, support structures and equipment, security, waste handling areas,
16 ventilation, and fire protection.

17 The contaminated area will be decontaminated. If a release is to a permeable surface, such as
18 soil, asphalt, concrete, or other surface, the surface material will be removed and placed in
19 containers meeting applicable DOT requirements. Contaminated soil, asphalt, concrete, or other
20 surface material, as well as materials used in the cleanup (e.g., rags and absorbent material)
21 will be contained and disposed of in the same manner as dictated for the contaminant. Clean
22 soil, new asphalt, or new concrete will be emplaced at the spill location.

23 If a spill occurs on an impermeable surface, the surface will be decontaminated with water
24 and/or a detergent. In the event that the spilled material is water reactive, a compatible
25 nonhazardous cleaning solution will be used. Contaminated wash water or cleaning solution will
26 be transferred to an appropriate container, marked, and managed as described above for
27 nonradioactive or radioactive liquid wastes.

28 In the event of a hazardous material or hazardous waste release, the RCRA Emergency
29 Coordinator will ensure that no wastes will be received or disposed of in the affected areas until
30 cleanup operations have been completed. This is to ensure that incompatible waste will not be
31 present in the vicinity of the release.

32 Because of the restrictions which the WIPP facility places on generators, and because of control
33 of WIPP operations, TRU mixed wastes and derived wastes will not contain any incompatible
34 wastes. However, the areas established for the temporary holding of nonradioactive waste
35 routinely generated at the WIPP facility is divided into bays to accommodate the management of
36 wastes that may be incompatible. If waste is generated as the result of a spill or release of
37 hazardous materials or nonradioactive hazardous waste, the waste generated as a result of
38 abatement and cleanup will be evaluated to determine its compatibility with other wastes being
39 managed in the temporary holding areas. The evaluation will be by identifying the material or
40 waste that was spilled or released and determining its characteristics (e.g., ignitable, reactive,
41 corrosive, or toxic). The waste generated by the abatement and cleanup activities will be stored
42 in that part of the temporary holding area that has been established to manage wastes with
43 which it is compatible.

1 For small nonemergency liquid spills (e.g., a detergent solution leaking out of the pump handle
2 during decontamination, a spill of hydraulic fluid while servicing a vehicle), spill control
3 procedures will be used to contain and absorb free-standing liquid. The contaminated absorbent
4 will be swept or shoveled into a compatible container and managed as described above. No
5 notifications will be required, but site procedures require documentation of the incident.

6 F-4g Incompatible Waste

7 Implementation of the TSDF-WAC for the WIPP ensures that incompatible TRU mixed waste
8 will not be shipped to the WIPP facility. Nonradioactive waste at the WIPP facility will be
9 carefully segregated during handling and holding and will be transported within and off the
10 facility. The RCRA Emergency Coordinator will not allow hazardous or TRU mixed waste
11 operations to resume in a building or area in which incompatible materials have been released
12 prior to completion of necessary post-emergency cleanup operations to remove potentially
13 incompatible materials. In making the determination of compatibility, the RCRA Emergency
14 Coordinator will have available the resources and information described in Section F-4b,
15 Identification of Hazardous Materials. In addition, ES&H department personnel will be available
16 for consultation. Finally, the RCRA Emergency Coordinator may use EPA-600/2-80-076, (EPA,
17 1980).

18 F-4h Post-Emergency Facility and Equipment Maintenance and Reporting

19 The RCRA Emergency Coordinator will ensure that emergency equipment that is located or
20 used in the affected area(s) of the facility and listed in the Contingency Plan is cleaned and
21 ready for its intended use before operations are resumed, as specified in 20.4.1.500 NMAC
22 (incorporating 40 CFR §264.56(h)(2)). Any equipment that cannot be decontaminated will be
23 discarded as waste (e.g., hazardous, mixed, solid), as appropriate. The WIPP facility is
24 committed to replacing any needed equipment or supplies that cannot be reused following an
25 emergency. After the equipment has been cleaned, repaired, or replaced, a post-emergency
26 facility and equipment inspection will be performed, and the results will be documented.

27 Cleaning and decontaminating equipment will be accomplished by physically removing gross or
28 solid residue; rinsing with water or another suitable liquid, if required; and/or washing with
29 detergent and water. Decontamination and cleaning will be conducted in a confined area, such
30 as a wash pad or building equipped with a floor drain and sump isolated from the environment.
31 Care will be taken to prevent wind dispersion of particles and spray. Liquid or particulate
32 resulting from cleaning and decontamination of equipment will be placed in clean, compatible
33 containers. Waste produced in an emergency cleanup in the TRU mixed waste handling areas
34 is derived waste and will be emplaced in the underground derived waste emplacement area.
35 Waste resulting from decontamination operations elsewhere in the WIPP facility will be analyzed
36 for hazardous waste constituents and/or hazardous waste characteristics to ensure proper
37 management.

38 When the WIPP facility has completed post-emergency cleanup of waste and hazardous
39 residues from areas where waste management operations are ready to resume and the RCRA
40 Emergency Coordinator has ensured that emergency equipment used in managing the
41 emergency has been cleaned or replaced and is fit for service, the notifications will be made by
42 the Permittees to the following: the EPA Region VI Administrator; the Secretary of the NMED;

1 and any relevant local authorities. This post-emergency notification complies with 20.4.1.500
2 NMAC (incorporating 40 CFR §264.56(i)), and is the responsibility of the RCRA Emergency
3 Coordinator.

4 F-4i Container Spills and Leakage

5 The waste received at the WIPP facility will meet stringent TSDF-WAC (e.g., no free liquids and
6 less than one percent residual liquids), which will minimize the possibility of waste container
7 degradation and liquid spills. Should a spill or release occur from a container, following an initial
8 assessment of the event, the WIPP facility will immediately take the following actions, in
9 compliance with 20.4.1.500 NMAC (incorporating 40 CFR §264.52(a) and §264.171):

- 10 ● Assemble the required response equipment, such as protective clothing and
11 gear, heavy equipment, empty drums, overpack drums, and hand tools
- 12 ● Transfer the released material to a container that is in good condition or overpack
13 the leaking container into another container that is in good condition
- 14 ● Once the release has been contained, determine the areal extent of migration of
15 the release and proceed with appropriate cleanup action, such as chemical
16 neutralization, vacuuming, or excavation

17 F-4j Tank Spills and Leakage

18 The TRU mixed waste handling areas at the WIPP facility do not include tank storage or
19 treatment of hazardous waste, as defined in 20.4.1.101 NMAC (incorporating 40 CFR §260.10),
20 and as regulated under 20.4.1.500 NMAC (incorporating 40 CFR §264) Subpart J. At the WIPP
21 facility, tanks are used to store water and petroleum fuels only. The petroleum tanks store diesel
22 and unleaded gasoline.

23 F-4k Surface Impoundment Spills and Leakage

24 The WIPP facility does not manage hazardous or TRU mixed waste using a surface
25 impoundment, as defined in 20.4.1.101 NMAC (incorporating 40 CFR §260.10), and as
26 regulated under 20.4.1.500 NMAC (incorporating 40 CFR, §264) Subpart K. Surface
27 impoundment regulations are not applicable to the WIPP facility.

28 F-5 Emergency Equipment

29 A variety of equipment is available at the facility for emergency response, containment, and
30 cleanup operations in both the HWMUs and the facility in general. This includes equipment for
31 spill control, fire control, personnel protection, monitoring, first aid and medical attention,
32 communications, and alarms. This equipment is immediately available to emergency response
33 personnel. A listing of major emergency equipment available at the WIPP facility, as required by
34 20.4.1.500 NMAC (incorporating 40 CFR §264.52(e)), is shown in Table F-6. Table F-7
35 identifies the locations where fire suppression systems are provided. Locations of the
36 underground emergency equipment are shown in Figure F-5. The firewater-distribution system

1 map is shown in Figure F-6. The underground fuel area fire-protection system is shown in
2 Figure F-7.

3 F-6 Coordination Agreements

4 The Permittees have established MOUs with off-site emergency response agencies for
5 firefighting, medical assistance, hazardous materials response, and law enforcement. In the
6 event that on-site response resources are unable to provide all the needed response actions
7 during either a medical, fire, hazardous materials, or security emergency, the RCRA Emergency
8 Coordinator will notify appropriate off-site response agencies and request assistance. Once on
9 site, off-site emergency response agency personnel will be under the direction of the RCRA
10 Emergency Coordinator.

11 The MOUs with off-site cooperating agencies are available from the Permittees. A listing and
12 description of the MOUs with state and local agencies and mining operations in the vicinity of
13 the WIPP facility, as required by 20.4.1.500 NMAC (incorporating 40 CFR §264.37 and
14 §264.52(c)), are:

- 15 ● An agreement among the Permittees, Intrepid Potash NM LLC, and Mosaic
16 Potash Carlsbad Inc., provides for the mutual aid and assistance, in the form of
17 MRTs, in the event of a mine disaster or other circumstance at either of the two
18 facilities. This provision ensures that the WIPP MOC will have two MRTs
19 available at all times when miners are underground.
- 20 ● A memorandum of agreement between the City of Carlsbad, New Mexico, and
21 the WIPP MOC for ambulance service assistance provides that, upon notification
22 by the WIPP MOC, the Carlsbad Fire Department/Ambulance Service will be
23 dispatched from Carlsbad toward the WIPP site by a designated route and will
24 accept the transfer of patient(s) being transported by the WIPP facility ambulance
25 at the point both ambulances meet. If the patient(s) is not transferrable, the
26 Carlsbad Fire Department/Ambulance Service will provide equipment and
27 personnel to the WIPP facility ambulance, as necessary.
- 28 ● A MOU between the DOE and the Carlsbad Medical Center provides for the
29 treatment of radiologically contaminated personnel who have incurred injuries
30 beyond the treatment capabilities at the WIPP facility. The DOE will provide
31 transport of the patient(s) to the Carlsbad Medical Center for decontamination
32 and medical treatment.
- 33 ● A MOU between the DOE and the Lea Regional Medical Center provides for the
34 treatment of radiologically contaminated personnel who have incurred injuries
35 beyond the treatment capabilities at the WIPP facility. The DOE will provide
36 transport of the patient(s) to the Lea Regional Medical Center for
37 decontamination and medical treatment.
- 38 ● A MOU between the DOE and the U.S. Department of Interior (**DOI**), represented
39 by the Bureau of Land Management (**BLM**), Roswell District, provides for a fire-
40 management program that will ensure a timely, well-coordinated, and cost-

1 effective response to suppress wild fire within the withdrawal area using the
2 WIPP incident commander for fire-management activities. The DOI will provide
3 firefighting support if requested. In addition, the MOU provides for responsibilities
4 concerning cultural resources, grazing, wildlife, mining, gas and oil production,
5 realty/lands/rights-of-way, and reclamation.

- 6 ● A mutual-aid firefighting agreement between the Eddy County Commission and
7 the DOE provides for the assistance of the Otis and Joel Fire Departments (a
8 volunteer fire district created under the Eddy County Commission and the New
9 Mexico State Fire Marshall's Office), including equipment and personnel, at any
10 location within the WIPP Fire Protection Area upon request by an authorized
11 representative of the WIPP Project. These responsibilities are reciprocal.

- 12 ● A mutual-aid agreement between the City of Hobbs and the DOE provides for
13 mutual ambulance, medical, fire, rescue, and hazardous material response
14 services; provides for joint annual exercises; provides for use of WIPP facility
15 radio frequencies by the City of Hobbs during emergencies; and provides for
16 mutual security and law enforcement services, within the appropriate jurisdiction
17 limits of each party.

- 18 ● A mutual-aid agreement between the City of Carlsbad and the DOE provides for
19 mutual ambulance, medical, fire, rescue, and hazardous material response
20 services; provides for joint annual exercises; provides for use of WIPP facility
21 radio frequencies by the City of Carlsbad during emergencies; and provides for
22 mutual security and law enforcement services, within the appropriate jurisdiction
23 limits of each party.

- 24 ● A MOU between the DOE and the New Mexico Department of Public Safety
25 (**DPS**) concerning Mutual Assistance and Emergency Management applies to
26 any actual or potential emergency or incident that: 1) involves a significant threat
27 to employees of the Permittees or general public; 2) involves property under the
28 control or jurisdiction of either the DOE or the State; 3) involves a threat to the
29 environment which is reportable to an off-site agency; 4) requires the combined
30 resources of the DOE and the state; 5) requires a resource that the DOE has
31 which the State does not have, or a resource the State has which DOE does not
32 have; or 6) involves any other incident for which a joint determination has been
33 made by the DOE and the State that the provisions of this MOU will apply. The
34 MOU provides that the DPS shall permit qualified and security cleared DOE
35 Emergency Management members into the State EOC for the purpose of: a)
36 coordinating communications functions; b) evaluating and maintaining
37 communications capabilities; c) participating in exercises; d) link the State's High
38 Frequency radio communications network with the DOE; and e) assisting the
39 State during radioactive materials accidents that require joint operations or the
40 use of the DOE Radiological Assistance Program team. The DOE shall permit
41 qualified and security cleared members the State Emergency Management
42 community into the DOE's EOCs for the purposes of coordinating
43 communications and activities. Additional duties for each participant are specified
44 for assistance in incidents or emergencies.

1 F-7 Evacuation Plan

2 If it becomes necessary to evacuate the WIPP facility, the assigned on-site and off-site staging
3 areas have been established. The off-site staging areas are outside the security fence. The
4 WIPP facility has implementation procedures for both surface and underground evacuations.
5 Drills are performed on these procedures at the WIPP facility at least once annually. The
6 following sections describe the evacuation plan for the WIPP facility, as required under
7 20.4.1.500 NMAC (incorporating 40 CFR §264.52(f)).

8 F-7a Surface Evacuation On-site and Off-site Staging Areas

9 Figure F-8 shows the surface staging areas. Personnel report to their Office Wardens at
10 designated staging areas where accountability is conducted. If site evacuation is necessary, the
11 RCRA Emergency Coordinator will decide which staging areas are to be used and will advise
12 Office Wardens of the selections. The RCRA Emergency Coordinator will communicate the
13 locations to Office Wardens via office warden pager, radio, plectron, WIPP Security, or
14 telephone, as appropriate. Office Wardens will direct personnel to the selected staging area
15 outside the security fence. Personnel who are working in a contaminated area when site
16 evacuation is announced, will assemble at specific staging areas to minimize contact with other
17 personnel during the evacuation (Figure F-8).

18 Office Wardens conduct accountability of personnel assigned to their specific areas. For
19 complete surface accountability, the Office Wardens report to their ACOW, who reports to the
20 COW. When the COW has reports from all ACOWs, surface accountability is reported to the
21 CMRO, who then notifies the RCRA Emergency Coordinator of the accountability.

22 The COW and all ACOWs have radios for communication between them and the CMRO. The
23 Office Wardens, Assistant Office Wardens, ACOWs, and COW also have pagers with which
24 they are notified of evacuations. At the staging areas Office Wardens report directly to their
25 ACOW.

26 There are three off-site staging areas identified on Figure F-8. The RCRA Emergency
27 Coordinator determines which staging area will be used. Security officers remain at the primary
28 staging area gate 24 hours a day, and the vehicle trap is opened for personnel during
29 emergency evacuations. The north gate has a single person gate and large gate which can be
30 opened, similar to the main gates for the primary staging area. The east gate is a turnstile gate.
31 Upon notification by the RCRA Emergency Coordinator, Security will respond, open gates, and
32 facilitate egress for evacuation.

33 The on-site staging areas are identified in Figure F-8. These are used for building or area
34 evacuations as determined by the RCRA Emergency Coordinator.

35 F-7b Underground Assembly Areas and Egress Hoist Stations

36 In the event of an underground or surface event, the RCRA Emergency Coordinator can call for
37 underground personnel to report to assembly areas (Figure F-9). Underground personnel are
38 also trained to immediately report to assembly areas under specific circumstances (i.e. loss of
39 underground power or ventilation). If accountability is required, the underground will be

1 evacuated. The Underground Controller is responsible for underground accountability by
2 comparing the brass numbers with the brass tags signed out in the lamproom. Each assembly
3 area contains a Mine Page Phone, miners aid station, and evacuation maps.

4 In accordance with 30 CFR §57.11, the mine maintains two escapeways. These escapeways
5 are designated as Egress Hoist Stations. When an underground evacuation is called for, all
6 underground personnel report to the Egress Hoist Stations.

7 Decontamination of underground personnel will be conducted the same way as described for
8 surface decontamination. Contaminated personnel are trained to remain segregated from other
9 personnel until RC personnel can respond to the incident at the underground location.

10 F-7c Plan for Surface Evacuation

11 Surface evacuation notification is initiated by the RCRA Emergency Coordinator directing the
12 CMRO to sound the surface evacuation alarm. The Office Wardens assist personnel in
13 evacuation from their areas. Evacuation routes and instructions are posted throughout the site.

14 If the EST/FPT notifies the ERT members by pager to respond to an identified area, these
15 members will not depart the site during an evacuation, but will report to the EST/FPT for
16 instructions and accountability. The EST/FPT notifies the COW of response members present.
17 These personnel will not evacuate until released by the RCRA Emergency Coordinator.

18 F-7d Plan for Underground Evacuation

19 Notification for underground evacuation will be made using the underground evacuation alarm
20 and strobe light signals.

21 Personnel will evacuate to the nearest egress hoist station. Primary underground evacuation
22 routes (identified by green reflectors on the rib) will be used, if possible. Secondary
23 underground evacuation routes (identified by red reflectors on the rib) will be used if necessary
24 (Figure F-5). Brass tags will be collected from personnel at the hoist collar on the surface, and
25 taken to the Underground Controller, who functions as an Office Warden. When all brass tags
26 are accounted for, underground accountability is reported to the RCRA Emergency Coordinator.

27 Upon reaching the surface, personnel will report to their on-site staging area to receive further
28 instructions.

29 Members of the FLIRT and the MRT who may be underground, will evacuate the underground
30 when an underground evacuation is called for. A reentry by the MRT will be performed
31 according to 30 CFR 49 and MSHA regulations for reentry into a mine. The two MRTs are
32 trained in compliance with 30 CFR 49 in mine mapping, mine gases, ventilation, exploration,
33 mine fires, rescue, and recovery.

34 F-7e Further Site Evacuation

35 In the event of an evacuation involving the need to transport employees, the following
36 transportation will be available:

- 1 ● Buses/vans—WIPP facility buses/vans will be available for evacuation of
2 personnel. The buses/vans are stationed in the employee parking lot.
- 3 ● Privately Owned Vehicles—Because many employees drive to work in their own
4 vehicles, these vehicles may be utilized in an emergency. Personnel may be
5 directed as to routes to be taken when leaving the facility.

6 These vehicles may be used to transport personnel who have been released from the site by
7 the RCRA Emergency Coordinator.

8 F-8 Required Reports

9 The RCRA Emergency Coordinator, on behalf of the Permittees, will note in the operating
10 record the time, date, and details of any incident that requires implementing this Contingency
11 Plan. This notation will be in the facility log maintained by the CMRO. In compliance with
12 20.4.1.500 NMAC (incorporating 40 CFR §264.56(j)), within 15 days after the incident, the
13 Permittees will ensure that a written report on the incident will be submitted to the EPA Region
14 VI Administrator and to the Secretary of the NMED. The report will include:

- 15 ● The name, address, and telephone number of the Owner/Operator
- 16 ● The name, address, and telephone number of the facility
- 17 ● The date, time, and type of incident (e.g., fire, explosion or release)
- 18 ● The name and quantity of material(s) involved
- 19 ● The extent of injuries, if any
- 20 ● An assessment of actual or potential hazards to human health or the
21 environment, where this is applicable
- 22 ● The estimated quantity and disposition of recovered material that resulted from
23 the incident

24 In addition to the above report, the Permittees will ensure that the ES&H Manager, or designee,
25 submits reports to the appropriate agencies as listed in Tables F-8 and F-9.

26 In accordance with 20.4.1.500 NMAC (incorporating 40 CFR §264.56(i)), the Permittees will
27 notify the Secretary of the NMED and EPA Region VI Administrator that the WIPP facility is in
28 compliance with requirements for the cleanup of areas affected by the emergency and that
29 emergency equipment used in the emergency response has been cleaned, repaired, or
30 replaced and is fit for its intended use prior to the resumption of waste management operations
31 in affected areas. The means the WIPP facility will use to meet these requirements are
32 described in Sections F-4e, F-4f, F-4g, and F-4h.

33 The WIPP requires the EST/FPT to initiate the "WIPP Hazardous Materials Incident Report" if
34 the Contingency Plan is implemented. A form is attached as Figure F-12. The form is initiated by

1 the EST/FPT. The RCRA Emergency Coordinator, CMRO, and Environmental Compliance
2 representatives complete their respective sections.

3 F-9 Location of the Contingency Plan and Plan Revision

4 The owner/operator of the WIPP facility will ensure that copies of this Contingency Plan are
5 available through the WIPP electronic controlled-document distribution system or in appropriate
6 controlled-document locations throughout the facility, and the alternate Emergency Operations
7 Center and the Joint Information Center at the Skeen Whitlock Building, and are, consequently,
8 available to all emergency personnel and organizations described in Section F-2. In addition,
9 the owner/operator will make copies available to the following outside agencies:

- 10 ● Intrepid Potash NM LLC and Mosaic Potash Carlsbad Inc.
- 11 ● Carlsbad Fire Department, Carlsbad
- 12 ● Carlsbad Medical Center, Carlsbad
- 13 ● Lea Regional Medical Center, Hobbs
- 14 ● Otis Fire Department, Otis
- 15 ● Hobbs Fire Department, Hobbs
- 16 ● Joel Fire Department, Carlsbad
- 17 ● BLM, Carlsbad
- 18 ● New Mexico State Police

19 The owner/operator of the WIPP facility will ensure that this plan is reviewed annually and
20 amended whenever:

- 21 ● Applicable regulations are revised
- 22 ● The RCRA Part B permit for the WIPP facility is revised in any way that would
23 affect the Contingency Plan
- 24 ● This plan fails in an emergency
- 25 ● The WIPP facility design, construction, operation, maintenance, or other
26 circumstances change in a way that materially increases the potential for fires,
27 explosions, or releases of hazardous waste or hazardous constituents or change
28 the response necessary in an emergency
- 29 ● The list of RCRA Emergency Coordinators change
- 30 ● The list of WIPP facility emergency equipment changes.

1 References

2 U.S. Environmental Protection Agency, "A Method for Determining the Compatibility of
3 Hazardous Waste," EPA-600/2-80-076, 1980.

4 U.S. Department of Transportation, Emergency Response Guidebook, U.S. Government
5 Printing Office, 1993.

6 Westinghouse Electric Corporation, 1994, "Quality Assurance Project Plan for WIPP Site
7 Effluent and Hazardous Materials Sampling," WP 02-EM1, Westinghouse Electric Corporation,
8 Carlsbad, New Mexico.

9 U. S. Department of Energy, "WIPP Safety Analysis Report," DOE/WIPP-95-2065, Rev. 2

10 U. S. Department of Energy, "WP 12-5, WIPP Radiation Safety Manual".

1

(This page intentionally blank)

1

TABLES

(This page intentionally blank)

**TABLE F-1
 HAZARDOUS SUBSTANCES IN LARGE ENOUGH
 QUANTITIES TO CONSTITUTE A LEVEL II INCIDENT**

Chemical Description	Building Location	Hazard Category
Ethylene Glycol Solution - 35%	Buildings 411; 412; 451; 452; 486; 463; 474C; FAC 414	Immediate (acute) Delayed (chronic)
Gasoline, Unleaded GASC0001	FAC 480	Fire Immediate (acute) Delayed (chronic)
No. 1 Diesel Fuel Oil GASC0210	S-1300 Maint Shop U/G; FACs 480, 255.1 & 255.2; Transport Tank; Building 456 Trailer 911F	Fire Immediate (acute) Delayed (chronic)
Multiple containers of TRU Waste as described in Permit Condition III.C.1	WHB Waste Shaft U/G	Delayed (chronic)
Hazardous materials in quantities that exceed 5 times the Reportable Quantity (Per DOE O 151.1) values as defined in 40 CFR 302	It should be noted that WIPP is not expected to possess such quantities.	Fire Immediate (acute) Delayed (chronic)

1
2
3
TABLE F-2
RESOURCE CONSERVATION AND RECOVERY ACT
EMERGENCY COORDINATORS

4
5
6
7
8
9
10
11
12
13

Name	Address*	Office Phone	Home Phone*
R. A. (Richard) Marshall (primary) ¹		234-8276 or 234-8695	
R. C. (Russ) Stroble (primary) ¹		234-8276 or 234-8554	
M. L. (Tex) Winans (primary) ¹		234-8276 or 234-8273	
J.E. (Joseph) Bealler ²		234-8276 or 234-8916	
M.G. (Mike) Proctor ²		234-8457	
G. L. (Gary) Kessler ²		234-8326	
A. E. (Alvy) Williams ¹ (primary)		234-8216 or 234-8276	
P.J. (Paul) Paneral ²		234-8498	
M.L. (Mark) Long ²		234-8170	

14 *NOTE: Personal information (home addresses and phone numbers) has been removed from information copies of this application.

15 ¹ The on-duty Facility Shift Manager is the primary RCRA Emergency Coordinator pursuant to 20.4.1.500 NMAC (incorporating 40
16 CFR §264.52), and is designated to serve as the RCRA Emergency Coordinator.

17 ² The on-duty Facility Operations Engineer is the alternate RCRA Emergency Coordinator and is available as needed.

**TABLE F-3
 PLANNING GUIDE FOR DETERMINING INCIDENT LEVELS AND RESPONSE**

INCIDENT CONDITION	INCIDENT LEVEL		
	I	II *	III *
Product identifications	Placard not required, NFPA 0 or 1 all categories, all Other Regulated Materials A, B, C, and D.	DOT placarded, NFPA 2 for any categories, PCBs without fire, EPA regulated waste. SITE SPECIFIC: Table G-1 and TRU mixed waste AND	Poison A (gas), explosive A/B, organic peroxide, flammable, solid, materials dangerous when wet, chlorine, fluorine, anhydrous ammonia, radioactive materials, NFPA 3 and 4 for any categories including special hazards, PCBs and fire including special hazards, PCBs and fire DOT inhalation hazard, EPA extremely hazardous substances, and cryogenics.
Container size	Container size does not impact this incident level.	Involves multiple packages.	Tank truck.
Fire/explosion potential	Under control.	May spread/may be explosive.	May spread/may be explosive.
Leak severity	No release or small release contained or confined with readily available resources.	Release may not be controllable without special resources.	Release may not be controllable even with special resources.
Life safety	No life-threatening situation from materials involved.	Localized area, limited evacuation area.	Localized area, limited evacuation area.
Environmental impact (Potential)	None.	Limited to incident boundaries	Contained within the Hazardous waste Management Units.
Container integrity	Not damaged.	Damaged but able to contain the contents to allow handling or transfer of product.	Damaged to such an extent that catastrophic rupture is possible.

* Contingency Plan is implemented

TABLE F-4
PHYSICAL METHODS OF MITIGATION

METHOD	CHEMICAL		RADIOLOGICAL	
	LIQUID	SOLID	LIQUID	SOLID
ABSORPTION	YES	NO	YES	NO
COVERING	YES	YES	YES	YES
DIKES, DIVERSIONS	YES	YES	YES	YES
OVERPACK	YES	YES	YES	YES
PLUG/PATCH	YES	YES	YES	YES
TRANSFER	YES	YES	YES	YES
VAPOR SUPPRESSION	YES	YES	NO	NO

1
2
3
4
5
6
7

TABLE F-5
CHEMICAL METHODS OF MITIGATION

METHOD	CHEMICAL		RADIOLOGICAL	
	LIQUID	SOLID	LIQUID	SOLID
NEUTRALIZATION	YES	YES ⁽¹⁾	NO	NO
SOLIDIFICATION	YES	NO	YES ⁽²⁾	NO

(1) When solid neutralizing agents are used, they will be used simultaneously with water.

(2) This method could be utilized for mitigation of firewater involving TRU-waste.

**TABLE F-6
 EMERGENCY EQUIPMENT MAINTAINED
 AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
Communications		
Building Fire Alarms	Manual pull stations and automatic devices (sprinkler system flow, and smoke and thermal detectors) trigger fire alarm; locally visible and audible; visual display and alarm in Central Monitoring Room (CMR)	Guard and Security Building, Pumphouse, Warehouse/Shops, Exhaust Filter Building, Support Building, CMR/ Computer Room, Waste Handling Building, TRUPACT Maintenance Facility, SH Hoisthouse, Maintenance Shops, Guard Shack*, Auxiliary Warehouse, Core Storage Building, Engineering Building, Training Facility, Safety Building, Maintenance Shop, Hazardous Waste Storage (non-TRU) Area (Facility 474) *local alarms; not connected to the CMR
Underground Fire Alarms	Automatic/Manual; have priority over other paging channel signals but not override intercom channels; alarms sound in the general area of the control panel and are connected to the underground evacuation alarms; they also interface with the CMR.	Fire detection and control panel locations: Waste Shaft Underground Station, SH Shaft Underground Station, Between E-140 and E-300 in S-2180 Drift, E-O/N-1200, Fuel Station
Site-wide Evacuation Alarm	Transmitted over paging channel of the public address system, overriding its normal use; manually initiated according to procedures requiring evacuation; audible alarm produced by tone generator at 10 decibels above ambient noise level (or at least 75 decibels); flashing strobe lights; radios and/or pagers are used to notify facility personnel outside alarm range. Monthly test are performed on the PA, site notification alarms, and plectrons.	Site-wide
Vehicle Siren	Manual; oscillating; emergency services/surface response vehicles, is mechanical and electronic.	WIPP surface emergency vehicles
Public Address System	Includes intercom phones; handset stations and loudspeaker assemblies, each with own amplifiers; multichannel, one for public address and pages, and others for independent party lines.	Surface and underground
Intraplant Phones	Private automatic branch exchange; direct dial; provide communication link between surface and underground operations	Throughout surface and underground
Mine Page Phones	Battery-operated paging system	CMR, Mine Rescue Room, EOC, lamproom, underground at S550/W30, S100/W30, S1950/E140, SH Shaft Collar and Underground Station, Waste Shaft Collar and Underground Station, FSM desk.

**TABLE F-6
EMERGENCY EQUIPMENT MAINTAINED
AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
1 Emergency Pagers	Manual; , intermittent alarm signals	Issued to appropriate emergency personnel
2 Plectrons	Tone-alert radio receivers placed in areas not accessible by the public address system	Site-wide
3 Portable Radios	Two-way, portable; transmits and monitors information to/from other transmitters	Issued to individuals
4 Plant Base Radios	Two-way, stationary, VHF-FM; linked to Eddy County Sheriff Department, NM State Police, and Otis Fire Department), and WIPP Channels 1-18 (Communication with the Lea County Sheriff's Department, the Hobbs Fire Department, Carlsbad Medical Center and Lea Regional Hospital is available via the Eddy County dispatcher) (Site Security, Site Operations and Site Emergency, maintenance, repeater to Carlsbad). Wireless communications such as cellular phones may be used to contact the Eddy County emergency responders.	Various site locations
5 Mobile Phones	Provide communications link between WIPP Security and key personnel	Issued to individuals plus emergency vehicles,
6	Spill Response	
7 8 SPILL-X-S Guns and Recharge Powder	Containment; (1)SPILL-X model SC-30-C(Gun) (1)SPILL-X model XC-30-S(Gun) (1)SPILL-X model SC-30-A(Gun); (1) A-Acid, 5 gallon bucket (Recharge Powder) (1)S-Solvent, 5 gallon bucket (Recharge Powder) (1)C-Caustic, 5 gallon bucket (Recharge Powder)	HAZMAT trailer
9 Absorbent Sheets	Containment or cleanup; (1) 3' x 100' Sheet	HAZMAT trailer
10 Absorbents	Grab and Go container; spill control bucket; (1) for solvents and neutralizing absorbents; 5 gallon bucket (1) for acids/caustics; 5 gallon bucket	HAZMAT trailer
11 Absorbent Material	Containment or cleanup; (1) 100 ft. rolled or equivalent socks " Pig" for general liquid (1) 100 ft. rolled or equivalent socks " Pig" for oil	HAZMAT trailer
12 Air Bag System	Extrication, Stabilization, Cribbing (1) bag system with tank kit and the following bag sizes: (1)12-ton, (1) 21.8-ton, (1)17-ton	Surface rescue truck
13 Air Chisel	Extrication (1) Capable of cutting 3/16" steel	Surface rescue truck

**TABLE F-6
 EMERGENCY EQUIPMENT MAINTAINED
 AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
1 2 Drum Transfer Pumps and Drum Opener	Containment or cleanup; (1) unit for chemical transfer (1) hand operated pump for petroleum transfer (1) drum opener	HAZMAT trailer
3 Floor Squeegee	Containment or cleanup; (1) straight rubber blade, nonwood handle	HAZMAT trailer
4 Foam Concentrate	AFFF 6% (4) 5-gallon pail	Fire truck # 1
5 6 Gas Cylinder Leak Control Kit	(1)Series A Hazardous Material Response Kit; contains nonsparking equipment to control and plug leaks	HAZMAT trailer
7 Portable Generator	(1)Backup power; 5,000 watt; 120 or 240 volt	Surface rescue truck
8 Hand Tools	Containment and cleanup; Underground rescue truck: (1)12# Sledge Hammer (1)3/8" Drive Socket Set (1)1/2" Drive Socket Set (1)3/4" Drive Socket Set (1)25' 1/2" Chain (1)6' Wrecking Bar (1)Bottle Jack (1)4# Hammer (1)18" Crescent Wrench (1)5' Pry Bar (1)2' Pry Bar (1)100' Extension Cord (1)4' Nylon Sling (1)6' Nylon Sling (1)10' Nylon Sling These tools are located in the HAZMAT Trailer. They are non-sparking. (1)14"L adjustable pipe wrench (1)15" multi-opening bung wrench (1)hammer/crate opener (1)8" pipe pliers (1)8" blade Phillips (1)#2 screwdriver (1)6" blade standard screwdriver (1)Claw Hammer	Underground rescue truck, HAZMAT trailer
9 Come-a-longs	(1) 4-ton; cable-type Ratchet lever tool designed specifically for lifting, lowering and pulling applications including jobs requiring rigging, positioning, and stretching. Used in rescue for extrication.	Surface rescue truck and underground rescue truck
10 Porta-power	(1) 10-ton hydraulic, hand-powered jaws used for extrication during rescues.	Surface rescue truck
11 Jugs	Containment or cleanup; (4) 1-gallon plastic	HAZMAT trailer

**TABLE F-6
EMERGENCY EQUIPMENT MAINTAINED
AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
1 Pails	Containment or cleanup; (3) 5-gallon plastic with lid	HAZMAT trailer
2 Portable Lighting	(1) Emergency lighting system; 120 volts; 500-watt bulbs, suitable for wet location	Underground rescue truck
3 Patching Kit	Series A Hazardous Response Kit; Class A; contains nonsparking equipment to control and plug leaks.	HAZMAT trailer
4 Scoops and Shovels	Cleanup; plastic; various sizes; nonsparking; nonwood handles (1) Scoop (3) Shovels	HAZMAT trailer
5	Medical Resources	
6 Ambulance #1	Equipped as per Federal Specifications KKK-A-1822 and New Mexico Emergency Medical Services Act General Order 35; equipped with a radio to Carlsbad Medical Center, VHF radio, UHF medical frequency, cellular phone	Surface (Safety and Emergency Services Facility)
7 Ambulance #2	Diesel hardcab ambulance equipped with first aid kit, 2 stretchers, and other associated medical supplies	Underground
8 Rescue Truck	Special purpose vehicle; light and heavy duty rescue equipment; transports 1 litter patient, medical oxygen and supplies for mass casualties, fire suppression support equipment (rescue tool, air bag, K-12 Rescue Saw, 5,000-watt generator, self-contained breathing apparatus (SCBA), and much more equipment	Surface (Safety and Emergency Services Facility)

**TABLE F-6
 EMERGENCY EQUIPMENT MAINTAINED
 AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
1 Fire Detection and Fire Suppression Equipment		
2 Building Smoke, 3 Thermal Detectors, or 4 Manual Pull Stations	Ionization and photoelectric or fixed temperature/rate of rise detectors; visual display and alarm in CMR; manual pull stations. The underground has manual fire alarm pull stations located where personnel have access when evacuating. These are connected to the U/G evacuation alarm.	Guard and Security Building, Warehouse/Shops, Support Building, CMR/Computer Room, Waste Handling Building, TRUPACT Maintenance Facility, Waste Shaft Collar, Underground Fuel Station, SH Hoisthouse, Engineering Building, Industrial Safety Building, Training Facility
5 Fire Truck # 1	Equipped per Class "A" fire truck per NFPA; capacity 750 gallons, with pump capacity of 1200 gallons per minute	Surface (Safety and Emergency Services Facility)
6 Rescue Truck # 2 7 (U/G)	(1) 125-pound dry chemical extinguisher (1) 150-pound foam extinguisher	Underground
8 Extinguishers	Individual fire extinguisher stations; various types located throughout the facility, conforming to NFPA-10.	Buildings, underground, and underground vehicles
9 Automatic Dry 10 Chemical 11 Extinguishing Systems	Automatic; 1,000-pound system (Purple K); actuated by thermal detectors or by manual pull stations	Underground fuel station
12 Sprinkler Systems	Fire alarms activated by water flow	Pumphouse, Guard and Security Building, Support Building, Waste Handling Building (contact-transuranic waste area only), Warehouse/Shops Building, Auxiliary Warehouse Building, TRUPACT Maintenance Facility, Training Facility, SH Shaft Hoisthouse, Exhaust Filter Building, Engineering Building, and Safety Building
13 Water Tanks, Hydrants	Fire suppression water supply; one 180,000-gallon capacity tank, plus a second tank with 100,000 gallon reserve	Tanks are at southwestern edge of WIPP facility; pipelines and hydrants are throughout the surface
14 Fire Water Pumps	Fire suppression water supply; 125 pounds per square inch, 1,500 gallons per minute centrifugal pump, one with electric motor drive, the other with diesel engine; pressure maintenance pump	Pumphouse

**TABLE F-6
EMERGENCY EQUIPMENT MAINTAINED
AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location	
Personal Protection Equipment			
1 2	Headlamps	Mounted on hard hat; battery operated	Each person underground
3 4	Underground Self-Rescuer Units	Short-term rebreathers; approximately 300	Each person underground
5 6 7	Self-Contained Breathing Apparatus (SCBA)	Oxygen supply; 4-hour units; approximately 14 Mine Rescue Team Draeger units	Mine Rescue Training Room
8 9 10	Chemical and Chemical-Supported Gloves	Body protection; (12 pair) inner-cloth, (12 pair) outer-pvc, (5 pair) outer-viton	HAZMAT trailer
11	Suit, Acid	Body protection; (4) acid	HAZMAT trailer
12 13	Suit, Fully Encapsulated	Body protection; used with SCBAs; full outerboot; (4) Level A; (4) Level B	HAZMAT trailer
Emergency Medical Equipment			
14 15	Antishock Trousers	Shock treatment; (2) inflatable, one on each ambulance	Ambulance # 1 and # 2
16 17 18	Zoll 1600 Heart Monitor and Defibrillator	Heart Monitor/defibrillator	Ambulance # 1 and # 2
19	Oxygen	Patient care; Size D: (2) Ambulance #1 (1) Underground Ambulance (1) Health Services Size E: (1) Rescue Truck (2) Underground Ambulance Size M: (1) Ambulance #1	Ambulance # 1 and # 2, surface rescue truck
20	Resuscitators (Bag)	Disposable bag resuscitation Ambulance #1: (2) adult size (1) child size Underground Ambulance: (2) adult size	Ambulance # 1, Ambulance # 2

**TABLE F-6
 EMERGENCY EQUIPMENT MAINTAINED
 AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
1 Splints	Immobilize limbs; (1) Adult traction splint, lower extremity, with limb-supporting slings, padded ankle hitch and traction device per ambulance. (2) Rigid splinting devices or equivalents, suitable for immobilization of upper extremities per ambulance. (2) Rigid splinting devices or equivalents, suitable for the immobilization of lower extremities. (1) Set of Airsplints: 6 assorted splints; hand/wrist, half arm, full arm, foot/ankle, half leg, and full leg per miner's aid stations.	Ambulance # 1 and # 2, Miner's Aid Stations
2 Stretchers	Patient transport; (2) Spine Boards, one short and one long, with nylon straps per ambulance. (also used to perform cardiopulmonary resuscitation) (2) Emergency Stretchers or scoops, or combination per ambulance (1) All-purpose multi-level ambulance stretch (gurney), with 3 safety straps and locking mechanism per ambulance. (1) Stretcher in each miner's aid station.	Various combinations in Ambulance # 1 and # 2, Miner's Aid Station
3 Suctions	For medical emergencies: Portable (1) Suction unit, capable of delivering at least 300 mm. HG on each ambulance.	Ambulances #1 and #2
4 Trauma Kits	(1) adult blood pressure cuff and stethoscope (4) soft-roller bandages (3) triangular bandages (1) pkg. band-aids (2) trauma dressings (25) 4X4 sponges (1) roll adhesive tape (1) bite stick (1) penlight (1) sterile burn sheet (1) oropharyngeal airway (1) glucose substance (2) sterile gauze dressings	(1) kit in each: Ambulances #1 and #2, surface rescue truck

**TABLE F-6
 EMERGENCY EQUIPMENT MAINTAINED
 AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
1 Miner's Aid Station	For First Aid Stations in the Underground (1) Stretcher--as referenced above per station (1) Set of airsplints--as referenced above per station (1) Blanket per station (1) Box of latex gloves (50) per station (5) Pathogen Wipes per station (1) First Aid Kit (24) per station; includes, (3) Band-Aid Combo Paks (2) Swabs, PVP (1) Antibiotic Ointment (1) Sting-Kill Swab (2) Dressing, compresses (2) Roller Bandages (2) Tape (2) Triangle Bandage (1) Eyedressing Pak (1) Burn Dressing (1) Ammonia Inhalants (1) User Log Sheet	Miner's Aid Stations - Various Underground Locations
2 First Aid Supplies	According to General Order #35 (12) bandages, soft roller, self-adhering type--4" or 6" x 5 yards. (6) triangular bandages, 40" (1) box band-aids (1) 1 pair bandage shears (6) Trauma dressings, 30" x 10" (6) Trauma dressings, 5" x 7" (50) 4" x 4" sponges, individually wrapped and sterile (2) rolls adhesive tape (1) penlight (2) sterile burn sheets (2) oropharyngeal airways -- adult (2) oropharyngeal airways -- child (Ambulance #1 only) (2) oropharyngeal airways -- infant (Ambulance #1 only) (1) Glucose substance (3) Occlusive dressings (1) Roll aluminum foil (6) Rigid cervical collars--2 each small, medium and large sizes (4) Cold packs (4) Heat packs (2) Bite sticks	Ambulance #1
3 First Aid Supplies	(2) Transfer sheets (2) Blankets	Ambulances #1 and #2
4 First Aid Supplies	(2) #16g angiosets (2) #18g angiosets (2) #20g angiosets (1) 1000cc LR IV fluid (1) 500cc NS IV fluid	Ambulances #1 and #2, surface rescue truck

**TABLE F-6
 EMERGENCY EQUIPMENT MAINTAINED
 AT THE WASTE ISOLATION PILOT PLANT**

Equipment	Description and Capabilities	Location
General Plant Emergency Equipment		
Emergency Lighting	For employee rescue and evacuation, and fire/spill containment; linked to main power supply, and selectively linked to back up diesel power supply and/or battery-backed power supply	Surface and underground
Backup Power Sources	Two diesel generators, and battery-powered uninterruptible power supply (UPS); use limited to essential loads; manual or remote starting 1,100-kilowatt diesel generators with on-site fuel for 62% load for 3 days for selected loads; 30-minute battery capacity for essential loads	Generators are east of Safety and Emergency Services Building; UPS is located at the essential loads
Hoists	Hoists in Waste Shaft, Air Intake Shaft, and SH Shaft	Waste Shaft, Air Intake Shaft, SH Shaft
Radiation Monitoring Equipment	(5) Portable alpha and beta survey meters, portable air samplers, and portable continuous air monitors	Building 412
Emergency Shower	For emergency flushing of contaminated individual	Surface
Eye Wash Fountains	For emergency flushing of affected eyes	Various locations on surface and in the underground
Decon Shower Equipment	Self-contained decon shower trailer, portable decon shower unit, disposable decon shower	Surface
Overpack containers	14-85 Gallon drums 4-SWBs 1-TDOP	Building 481 Building 481 Building 481
HEPA Vacuums	2 HEPA Vacuums to be utilized for removal of contamination.	Building 481
Aquaset or Cement	100 lbs. of aquaset or cement material for solidification of liquid waste generated as a result of fire fighting water or decontamination solutions.	Building 481
Polyvinyl Alcohol or Paint	1 - 5 gallon bucket of approved fixative to be used during recovery.	Building 481
TDOP Upender	Upender facilitates overpacking standard waste boxes	Building 481
Non hazardous Decontaminating Agents	4-1 Gallon bottles for decontamination of surfaces, equipment, and personnel	Building 481

TABLE F-7
TYPES OF FIRE SUPPRESSION SYSTEMS BY LOCATION

LOCATION	AS	AD	MPS	PFE
Waste Handling Building	*		*	*
Support Building	*		*	*
Exhaust Filter Building	*		*	*
Water Pumphouse	*		*	*
Underground Support Areas (also has rescue truck) (as illustrated in Figure F-5)		*	*	*
Station A Effluent Monitoring Shed			*	*
Station B Effluent Monitoring Shed			*	*

⁽¹⁾Symbols for WIPP fire-protection systems:

- AS = Automatic Wet Pipe Sprinkler System
- AD = Automatic Dry Chemical Extinguishing System
- MPS = Manual Pull Stations
- PFE = Portable Fire Extinguishers

⁽²⁾The Waste Handling Building and the Support Building contain the following:

- Automatic wet pipe sprinklers
- Fire detection in the heating, ventilation, and air conditioning instrumentation (Support Building, only)
- Manual pull stations
- Portable fire extinguishers
- Automatic detectors

The Safety and Emergency Services Building contains the following:

- Automatic wet pipe sprinklers
- Manual pull stations
- Portable fire extinguishers
- Automatic detectors

The Core Storage Building contains the following:

- Automatic wet pipe sprinklers
- Portable fire extinguishers

⁽³⁾The Exhaust Filter Building, Underground Facilities, Warehouse/Shops Building, Water Pumphouse, and Salt Handling Hoist house also have portable fire extinguishers, manual pull stations, and automatic detectors.

**TABLE F-8
 HAZARDOUS RELEASE REPORTING, FEDERAL**

Statute	Chemical Releases Covered	To Whom Report Will Be Made	What Will Be Reported	
			Immediately (Oral)	Subsequently (Written)
<p>Comprehensive Environmental Response, Compensation and Liability Act (CERCLA)/Superfund Amendments and Reauthorization Act (SARA) (40 CFR Part 302)</p>	<p>"Reportable quantities" of CERCLA/SARA "hazardous substances."</p>	<p>National Response Center: (800) 424-8802, State Emergency Response Commission: (505) 476-9681 (New Mexico State Police, Hazardous Materials Emergency Response), and Local Emergency Planning Committee: (505) 885-3581</p>	<p>1) Chemical identification; 2) what hazardous substance; 3) quantity released; 4) time, location and duration of release; 5) media of release; 6) health risks and medical advice; 7) proper precautions (e.g., evacuation); and 8) name and phone number of reporter and facility.</p>	<p>As soon as practicable, update of oral notice and response action taken. Send report to: New Mexico State Emergency Response Commission, Department of Public Safety, Title III Bureau, P.O. Box 1628, Santa Fe, New Mexico, 87504-1628, and Local Emergency Planning Committee, 324 S. Canyon Street, Suite B, Carlsbad, New Mexico 88220. National Response Center will contact the U.S. Environmental Protection Agency (EPA). EPA may request a written report.</p>
<p>Emergency Planning and Community Right-to-Know Act (SARA Title III) (40 CFR Parts 302 and 355)</p>	<p>SARA Title III "extremely hazardous substances."</p>	<p>National Response Center: (800) 424-8802, State Emergency Response Commission: (505) 476-9681 (New Mexico State Police, Hazardous Materials Emergency Response), and Local Emergency Planning Committee: (505) 885-3581.</p>	<p>1) Chemical identification; 2) what extremely hazardous substance; 3) quantity released; 4) time, location and duration of release; 5) media of release; 6) health risks and medical advice; 7) proper precautions (e.g. evacuation); and 8) name and phone number of reporter and facility.</p>	<p>As soon as practicable, update of oral notice and response action taken. Send report to: New Mexico State Emergency Response Commission, Department of Public Safety, Title III Bureau, P.O. Box 1628, Santa Fe, New Mexico, 87504-1628, and Local Emergency Planning Committee, 324 S. Canyon Street, Suite B, Carlsbad, New Mexico 88220. National Response Center will contact the U.S. Environmental Protection Agency (EPA) for an address if a written report is requested by EPA.</p>
<p>Resource Conservation and Recovery Act (RCRA), 40 CFR §§264.56(a) and 265.56(a)</p>	<p>Any imminent or actual emergency situation.</p>	<p>State or local agencies with designated response roles, if their help is needed: Carlsbad Police Department: 885-2111; Carlsbad Fire Department: 885-2111; Eddy County Sheriff: 887-7551.</p>	<p>What assistance is required.</p>	<p>Not Applicable (NA)</p>

**TABLE F-8
HAZARDOUS RELEASE REPORTING, FEDERAL**

1
2
3

4
5
6

Statute	Chemical Releases Covered	To Whom Report Will Be Made	What Will Be Reported	
			Immediately (Oral)	Subsequently (Written)
RCRA, 40 CFR §§264.56(d), 264.56(i), 265.56(d), and 265.56(i)	RCRA "hazardous waste" release, fire, or explosion, which could threaten human health or environment outside the facility.	National Response Center: (800) 424-8802 and State Emergency Response Commission: (505) 476-9681 (New Mexico State Police, Hazardous Materials Emergency Response).	(1) Name and telephone number of reporter; (2) name and telephone number of facility; (3) time and type of incident; (4) name and quantity of materials involved; (5) extent of injuries, if any; and (6) possible health or environmental hazards outside the facility.	Prior to resumption of operations, notify that: (1) no waste that may be incompatible with released material is treated, stored, or disposed of until cleanup is complete, and (2) all emergency equipment listed in the Contingency Plan is cleaned and fit for its intended use. Send to Secretary, New Mexico Environment Department, P.O. Box 26110, Santa Fe, New Mexico, 87502.
RCRA, 40 CFR §§264.56(i), 264.56(j), 265.56(i), and 265.56(j)	Any incident which triggers implementation of Contingency Plan.	New Mexico Environment Department, Emergency Response Office, 24-hour telephone: (505) 827-9329 (emergencies); for non-emergencies contact (866) 428-6535 (24 hour voice mail) or Monday to Friday, 8 am to 5 pm: (505) 428-2500.	NA	Within 15 days: 1) name, address and telephone number of owner/operator; 2) name, address and telephone number of facility; 3) date, time and type of incident (e.g. fire, explosion); 4) name and quantity of materials involved; 5) extent of injuries, if any; 6) possible hazards to human health or the environment; 7) estimated quantity of material that resulted from the incident. Prior to resumption of operations, notify that: 1) no waste that may be incompatible with released material is treated, stored, or disposed of until cleanup is complete, and 2) all emergency equipment listed in the Contingency Plan is cleaned and fit for its intended use. Send to Secretary, New Mexico Environment Department, P.O. Box 26110, Santa Fe, New Mexico, 87502.

**TABLE F-9
 HAZARDOUS RELEASE REPORTING, STATE OF NEW MEXICO**

Regulations	Chemical Releases Covered	To Whom Report Will Be Made	What Will Be Reported	
			Immediately (Oral)	Subsequently (Written)
<p>Title 20 of the New Mexico Administrative Code, Chapter 4, Part 1 (20.4.1 NMAC), Subpart V and Subpart VI</p>	<p>RCRA "hazardous waste" releases, fire, or explosion, which could threaten human health or environment outside the facility.</p>	<p>National Response Center: (800) 424-8802; State Emergency Response Commission and (505) 476-9620 (New Mexico State Police, Hazardous Materials Emergency Response)</p>	<p>1) Name and telephone number of reporter; 2) name and telephone number of facility; 3) time and type of incident; 4) name and quantity of material involved; 5) extent of injuries, if any; and 6) possible health or environmental hazards outside the facility.</p>	<p>Prior to resumption of operations, notify that: 1) no waste that may be incompatible with released material is treated, stored, or disposed of until cleanup is complete, and 2) all emergency equipment listed in the Contingency Plan is cleaned and fit for its intended use. Send to Secretary, New Mexico Environment Department, P.O. Box 26110, Santa Fe, New Mexico, 87502.</p>
<p>20.4.1 NMAC, Subpart V and Subpart VI</p>	<p>Any incident which triggers implementation of Contingency Plan.</p>	<p>New Mexico Environment Department, Emergency Response Office, 24-hour telephone: (505) 827-9329 (emergencies); for non-emergencies contact (866) 428-6535 (24 hour voice mail) or Monday to Friday, 8 am to 5 pm: (505)428-2500.</p>	<p>1) Name and telephone number of reporter; 2) name and address of facility; 3) name and quantity of materials involved, to extent known; 4) extent of injuries, if any; and 5) possible hazards to human health or the environment, outside the facility.</p>	<p>Within 15 days: 1) name, address and telephone number of owner/operator; 2) name, address and telephone number of facility; 3) date, time and type of incident (e.g., fire, explosion); 4) name and quantity of materials involved; 5) extent of injuries, if any; 6) possible hazards to human health or the environment; and 7) estimated quantity of material that resulted from the incident. Prior to resumption of operations, notify that: 1) no waste that may be incompatible with released material is treated, stored or disposed of until cleanup is complete, and 2) all emergency equipment listed in the Contingency Plan is cleaned and fit for its intended use. Send to Secretary, New Mexico Environment Department, P.O. Box 26110, Santa Fe, New Mexico, 87502.</p>

**TABLE F-9
 HAZARDOUS RELEASE REPORTING, STATE OF NEW MEXICO**

Regulations	Chemical Releases Covered	To Whom Report Will Be Made	What Will Be Reported	
			Immediately (Oral)	Subsequently (Written)
1 2 3 4 New Mexico Emergency Management Act, Section 74-4B-5	Any accident (spill) involving hazardous materials (including hazardous substances, radioactive substances, or a combination thereof) which may endanger human health or the environment.	New Mexico Environment Department: (505) 827-9329, State Emergency Response Commission: (505) 476-9681 (New Mexico State Police, Hazardous Materials Emergency Response), and Local Emergency Planning Committee: (505) 885-3581	1) Name, address and telephone number of owner or operator; 2) name, address and telephone number of facility; 3) date, time and type of incident; 4) name and quantity of material(s) involved; 5) extent of any injuries; 6) assessment of actual or potential threat to environment or human health; and 7) estimated quantity and disposition of recovered material.	Written submission within one week of time permittees become aware of discharge. Same as oral and description of noncompliance and its cause, the period of noncompliance including exact dates and times, and if the noncompliance has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence. Send reports to New Mexico Environment Department, Chief, Ground Water Quality Bureau, P.O. Box 26110, Santa Fe, New Mexico, 87502, New Mexico State Emergency Response Commission Department of Public Safety, Title III Bureau, P.O. Box 1628 Santa Fe, New Mexico, 87504-1628, and Local Emergency Planning Committee, 324 S. Canyon Street, Suite B, Carlsbad, New Mexico 88220.
5 6 7 8 9 10 New Mexico Water Quality Control Commission, Part 1, Section 203	Any discharge from any facility of oil or any other water contaminant in such quantities as may, with reasonable probability, injure or be detrimental to human health, animal or plant life, or property.	Chief, Ground Water Quality Bureau, New Mexico Environment Department, or his counterpart in any constituent agency delegated responsibility for enforcement of the rules as to any facility subject to such delegation (505) 827-2918.	Within 24 hours: 1) the name, address, and telephone number of the person or persons in charge of the facility; 2) the name, address, and telephone number of the owner/operator of the facility; 3) the date, time, location, and duration of the discharge; 4) the source and cause of the discharge; 5) a description of the discharge, including its chemical composition; and 6) the estimated volume of discharge, and immediate damage from the discharge.	Submit within seven days: verification of the prior oral notification, also provide any appropriate additions or corrections to the information contained in the prior oral notification. Within 15 days: submit a written report describing any corrective actions taken and/or to be taken relative to the discharge. Send reports to Chief, Ground Water Quality Bureau, New Mexico Environment Department, P.O. Box 26110, Santa Fe, New Mexico, 87502.

**TABLE F-9
 HAZARDOUS RELEASE REPORTING, STATE OF NEW MEXICO**

Regulations	Chemical Releases Covered	To Whom Report Will Be Made	What Will Be Reported	
			Immediately (Oral)	Subsequently (Written)
1 2 3 4 New Mexico Underground Storage Tank Regulations-2	Any known or suspected release from an Underground Storage Tank (UST) system, any spill or any other emergency situation.	New Mexico Environment Department Petroleum Storage Tank Bureau (505) 984-1741.	Within 24 hours: 1) the name, address, and telephone number of the agent in charge of the site at which the UST system is located, as well as the owner/operator of the system; 2) the name and address of the site and the location of the UST system on that site; 3) the date, time, location, and duration of the spill, release, or suspected release; 4) the source and cause of the spill, release, or suspected release; 5) a description of the spill, release, or suspected release, including its chemical composition; 6) the estimated volume of the spill, release, or suspected release; and 7) action taken to mitigate immediate damage from the spill, release, or suspected release.	Mail or deliver within seven days of the incident, a written notice describing the spill, release, or suspected release and any investigation or follow-up action taken or to be taken. Send reports to Petroleum Storage Tank Bureau, New Mexico Environment Department, 2044 Galisteo Street, Santa Fe, New Mexico, 87504.

1

FIGURES

(This page intentionally blank)

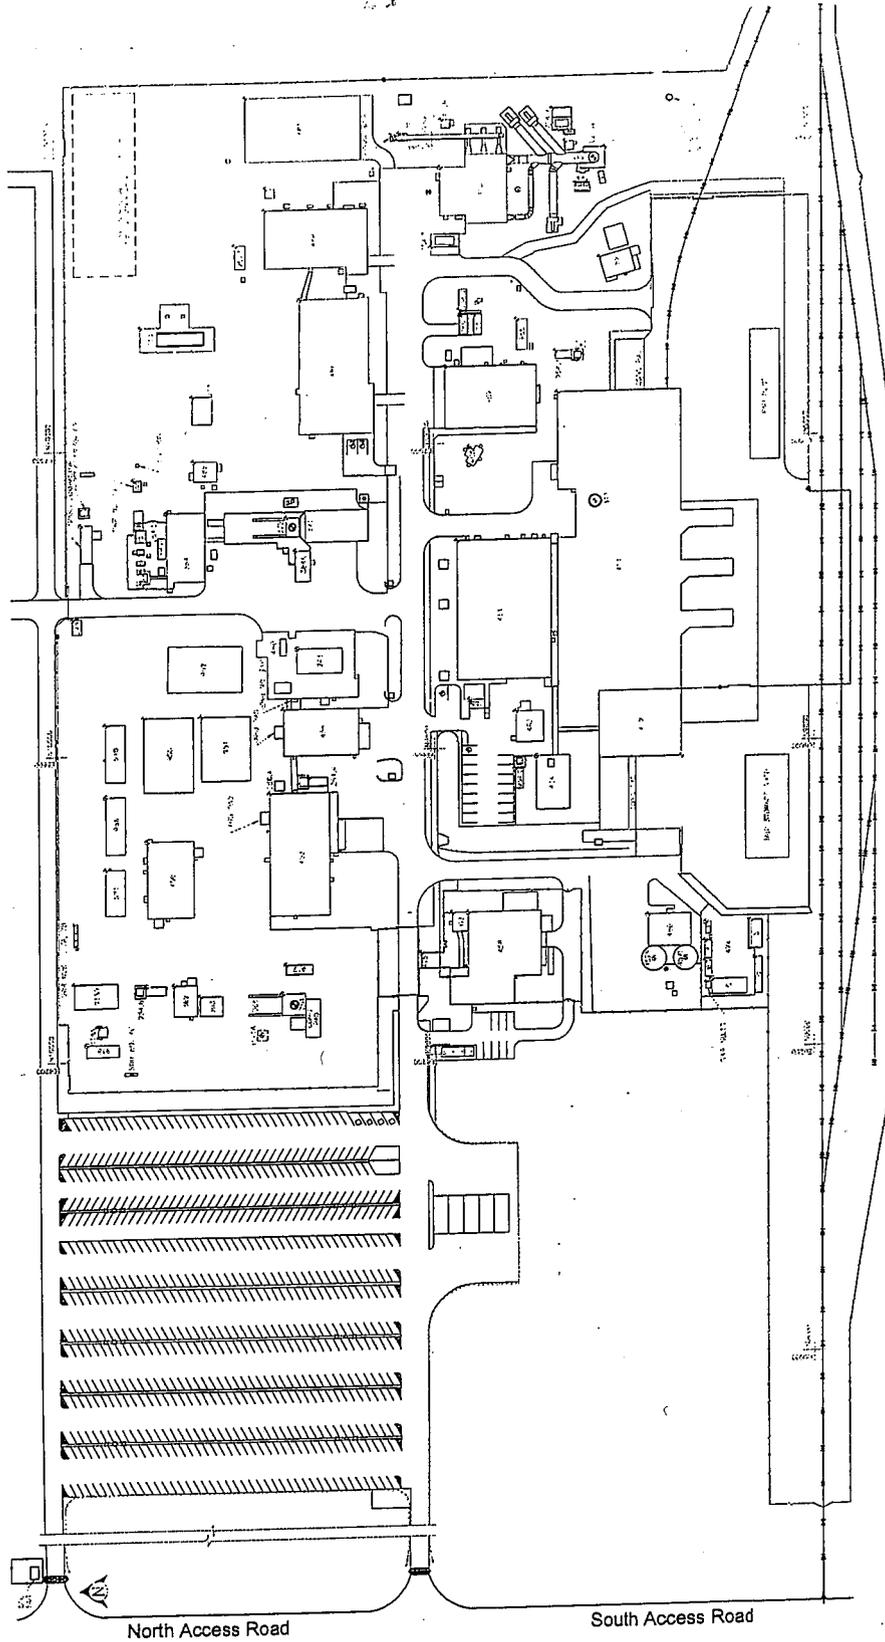


Figure F-1
WIPP Surface Structures

FACILITIES, USAGE AND STRUCTURE NUMBERS

BLDG/ FAC.	DESCRIPTION	BLDG/ FAC.	DESCRIPTION	BLDG/ FAC.	DESCRIPTION
#		#		#	
#241	EQUIPMENT SHED	#457	WATER TANK 25-D-001B	#918	VOC TRAILER
#242	GUARDSHACK	#458	GUARD AND SECURITY BUILDING	#918A	VOC AIR MONITORING STATION
#243	SALT HANDLING TRUCK SHELTER	#459	CORE STORAGE BUILDING	#918B	VOC LAB TRAILER
#253	13.8 KV SWITCHGEAR 25P-SWG15/1	#459A	SANDIA ANNEX	#950	WORK CONTROL TRAILER
#254.1	AREA SUBSTATION NO. 1 25P-SW15.1	#463	COMPRESSOR BUILDING	#951	PROCUREMENT/PURCHASING
#254.2	AREA SUBSTATION NO. 2 25P-SW15.2	#465	AUXILIARY AIR INTAKE	#952	TRAILER
#254.3	AREA SUBSTATION NO. 3 25P-SW15.3	#468	TELEPHONE HUT	#965	SAMPLE LABORATORY TRAILER
#254.4	AREA SUBSTATION NO. 4 25P-SW15.4	#473	ARMORY BUILDING	#971	HUMAN RESOURCES TRAILER
#254.5	AREA SUBSTATION NO. 5 25P-SW15.5	#474	HAZARDOUS WASTE STORAGE FACILITY	#986	PUBLICATIONS & PROCEDURES TRAILER
#254.6	AREA SUBSTATION NO. 6 25P-SW15.6	#474A	HAZARDOUS WASTE STORAGE BUILDING	SWR NO. 1	SWITCHRACK NO. 1
#254.7	AREA SUBSTATION NO. 7 25P-SW15.7	#474B	HAZARDOUS WASTE STORAGE BUILDING	SWR NO. 2	SWITCHRACK NO. 1
#254.8	AREA SUBSTATION NO. 8 25P-SW15.8	#474C	OIL & GREASE STORAGE BUILDING	SWR NO. 6	SWITCHRACK NO. 1
#254.9	480V SWITCHGEAR (25P-SBD04/4)	#474D	GAS BOTTLE STORAGE BUILDING	SWR NO. 7, 7A, 7B	SWITCHRACK NO. 7, 7A, 7B
#255.1	BACK-UP DIESEL GENERATOR #1 25-PE-503	#474E	HAZARD MATERIAL STORAGE BUILDING	SWR NO. 7c	SWITCHRACK NO. 7C
#255.2	BACK-UP DIESEL GENERATOR #2 25-PE-504	#474F	WASTE OIL RETAINER	SWR NO. 8	SWITCHRACK NO. 8
#256.4	SWITCHBOARD #4 (25P-SBD04/4)	#475	GATEHOUSE	SWR NO. 10	SWITCHRACK NO. 10
#311	WASTE SHAFT	#480	VEHICLE FUEL STATION	SWR NO. 11	SWITCHRACK NO. 11
#351	EXHAUST SHAFT	#481	WAREHOUSE ANNEX	SWR NO. 12	SWITCHRACK NO. 12
#361	AIR INTAKE SHAFT	#482	EXHAUST SHAFT HOIST EQUIP. WAREHOUSE	SWR NO. 15	SWITCHRACK NO. 15
#362	AIR INTAKE SHAFT/HOIST HOUSE	#485	SULLAIR COMPRESSOR BUILDING		
#363	AIR INTAKE SHAFT/MINCH HOUSE	#486	ENGINEERING BUILDING		
#364	EFFLUENT MONITORING INSTRUMENT SHED A	#489	TRAINING BUILDING		
#365	EFFLUENT MONITORING INSTRUMENT SHED B	#H-16	SANDIA TEST WELL		
#366	AIR INTAKE SHAFT HEADFRAME	#910	ENVIRONMENTAL MONITORING TRAILER		
#371	SALT HANDLING SHAFT				
#372	SALT HANDLING SHAFT HEADFRAME	#TBD	MgO STORAGE SHED		
#384	SALT HANDLING SHAFT HOISTHOUSE				
#384A	MINING OPERATIONS				
#411	WASTE HANDLING BUILDING				
#412	TRUPACT MAINTENANCE BUILDING				
#413	EXHAUST SHAFT FILTER BUILDING				
#413A	MONITORING STATION A				
#414	WATER CHILLER FACILITY & BLDG				
#451	SUPPORT BUILDING				
#452	SAFETY & EMERGENCY SERVICES FACILITY				
#453	WAREHOUSE/SHOPS BUILDING				
#455	AUXILIARY WAREHOUSE BUILDING				
#456	WATER PUMPHOUSE				
#457	WATER TANK 25-D-001A				

Figure F-1a
 Legend to Figure F-1

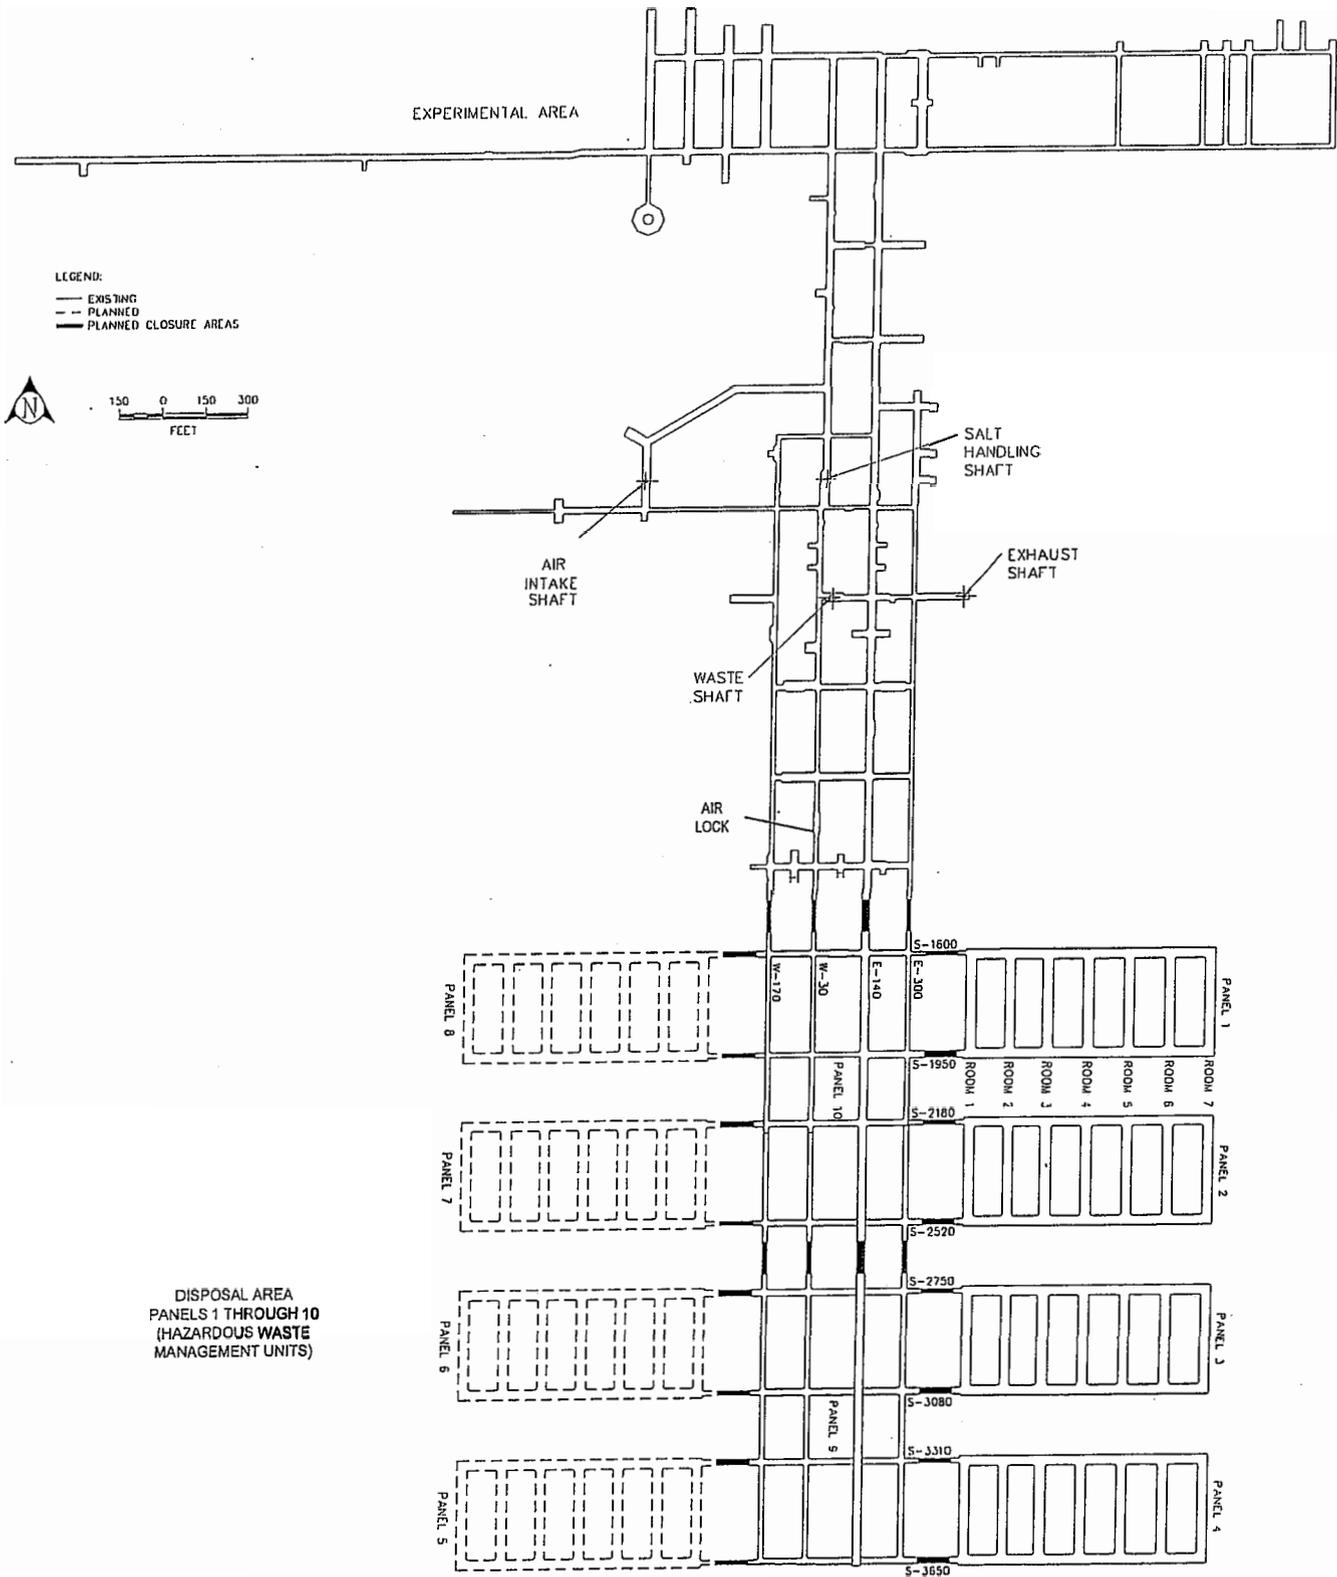


Figure F-3
 WIPP Underground Facilities

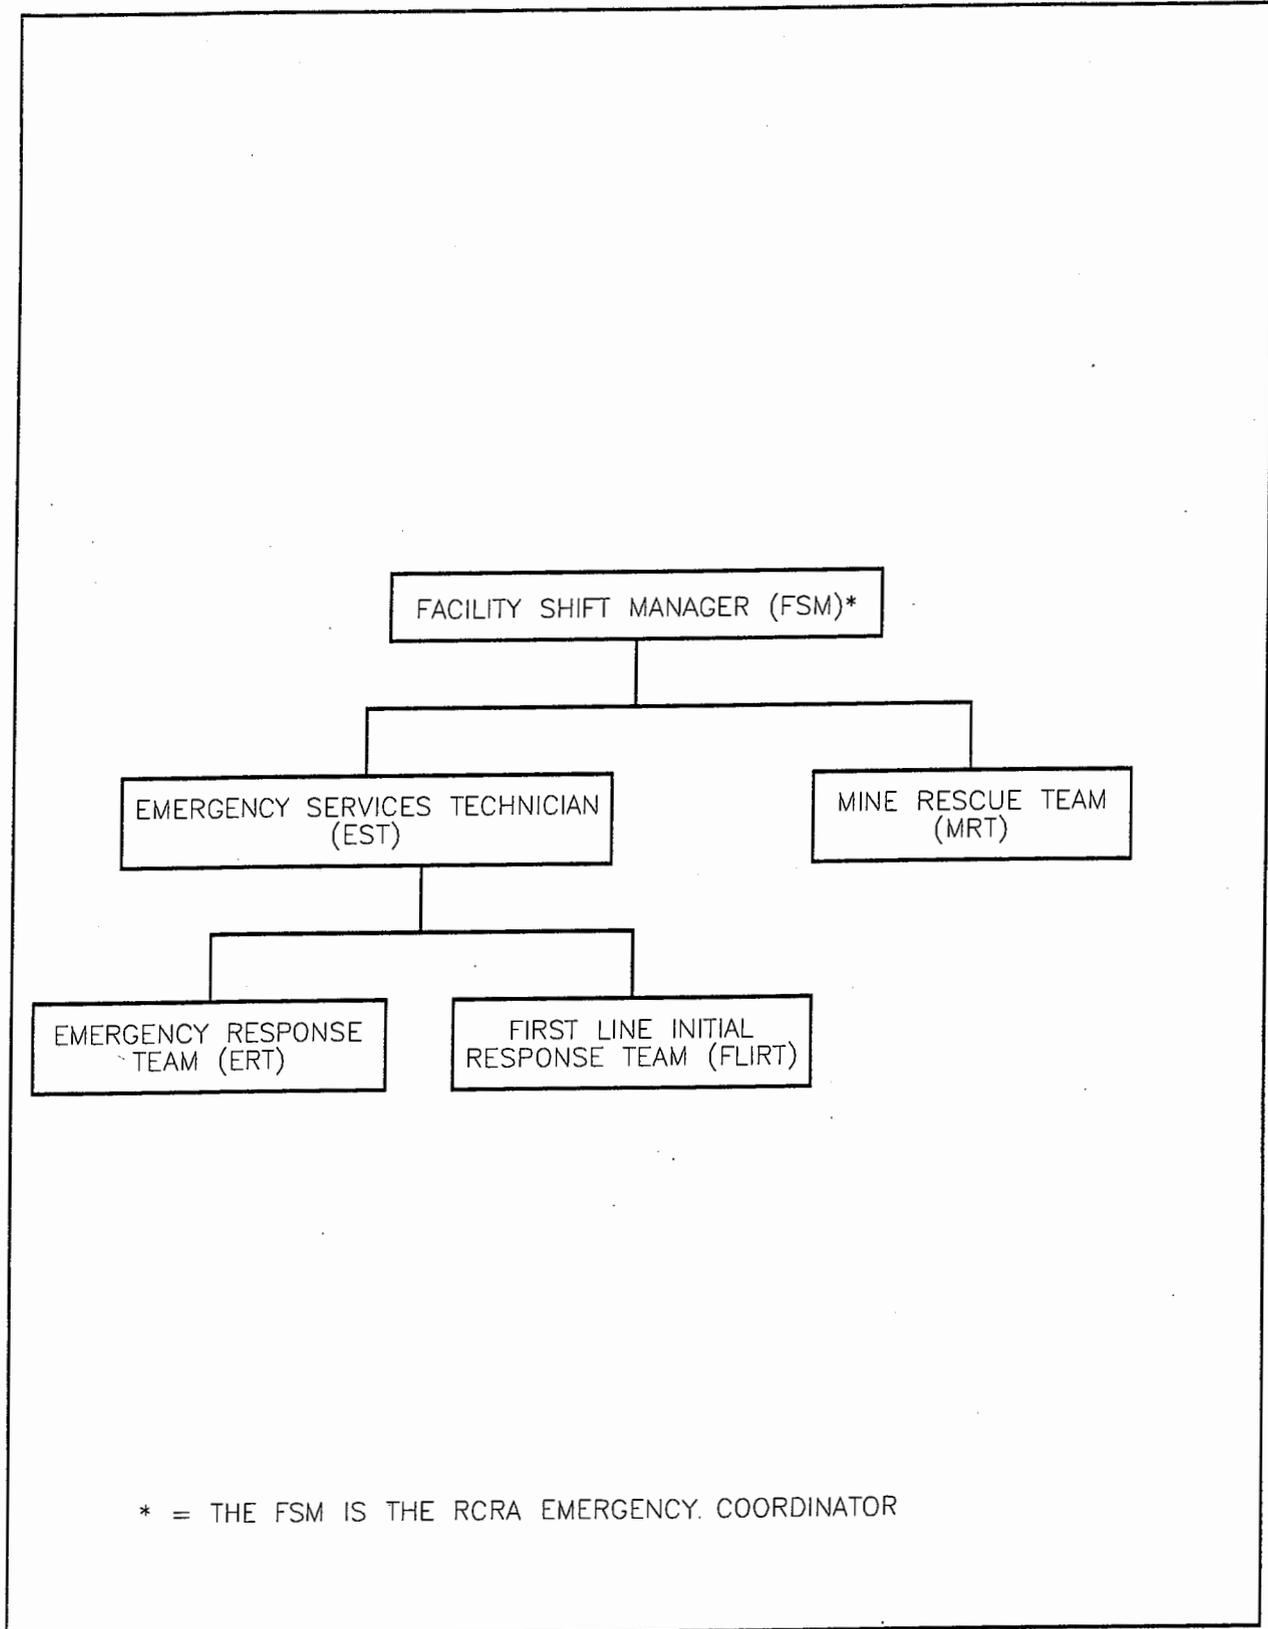


Figure F-4
Direction and Control Under Emergency Conditions in Which the Plan Has Been Implemented

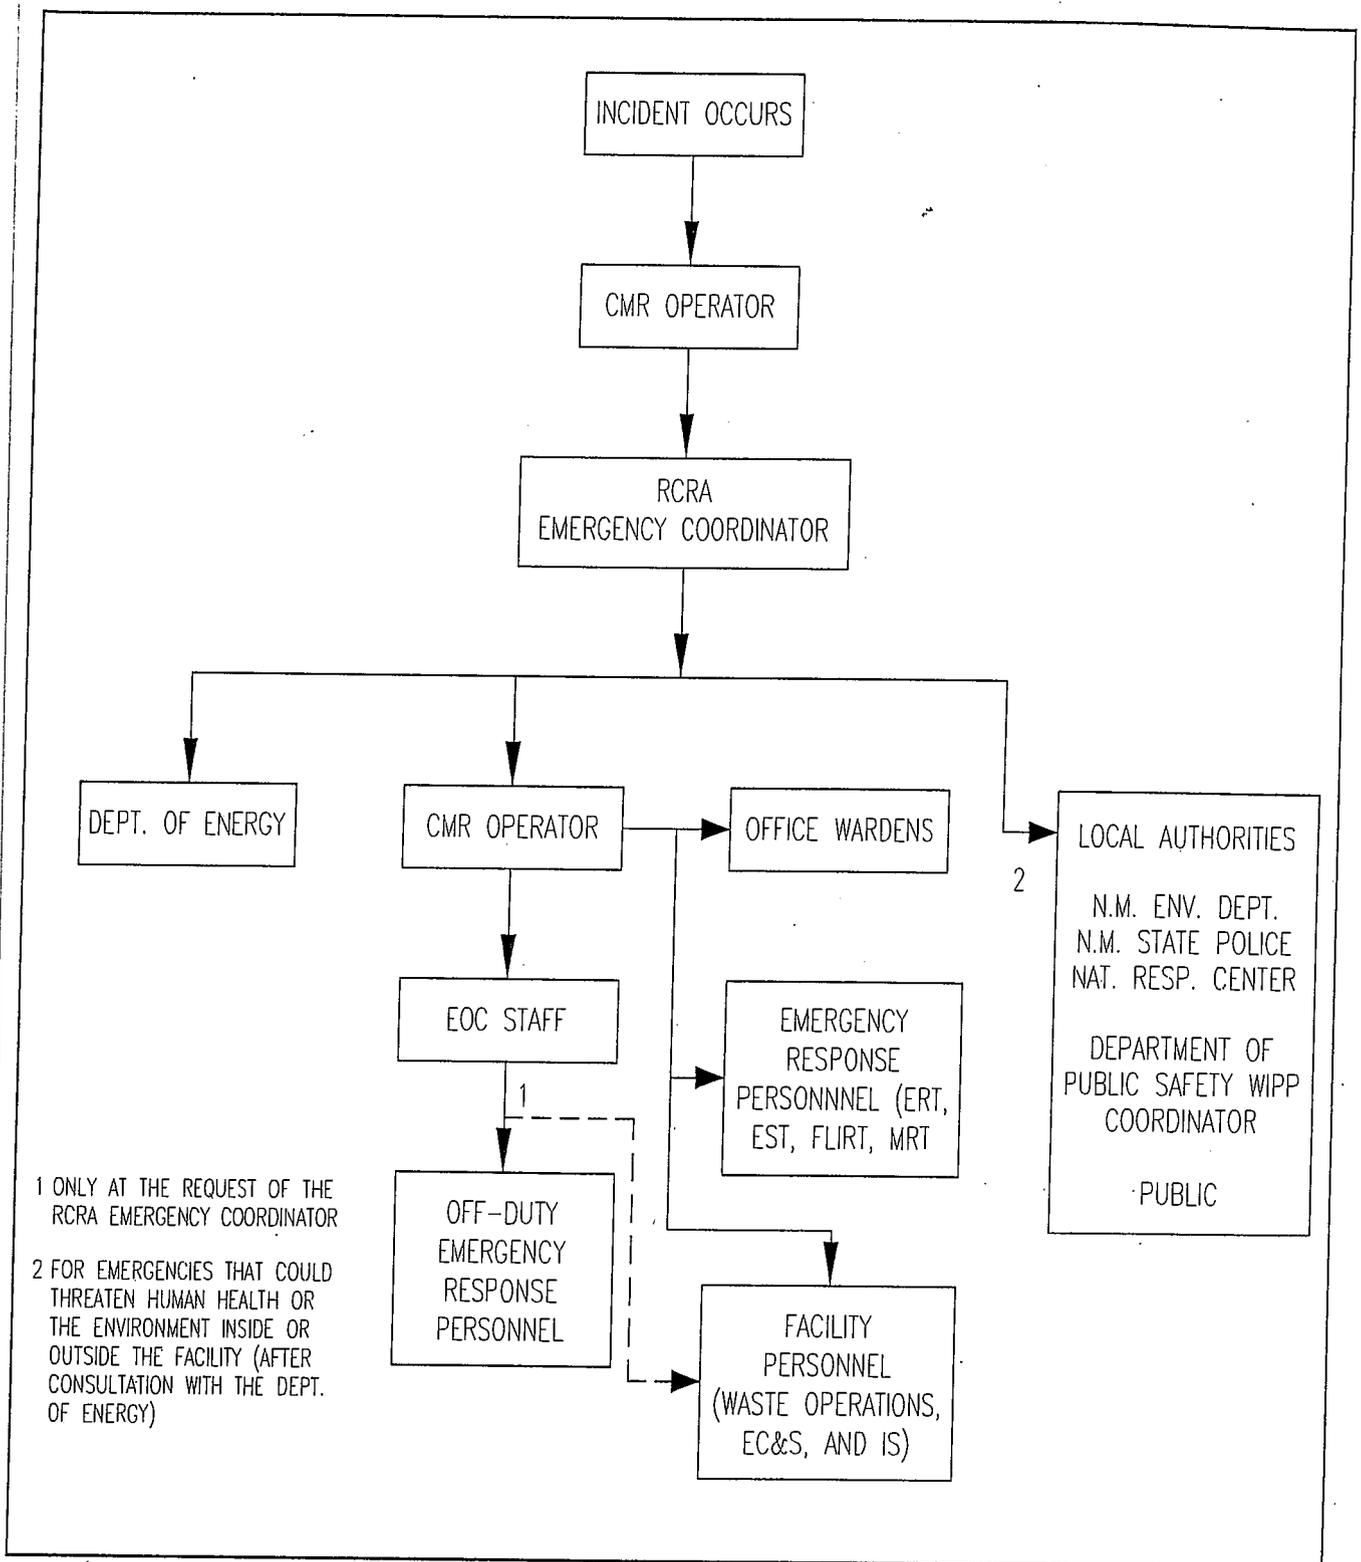



Figure F-4a
 WIPP Facility Emergency Notifications

GENERAL INSTRUCTIONS

ANY TIME AN EVACUATION ALARM IS SOUNDED PROCEED TO THE NEAREST EGRESS HOIST STATION.

ALL CARS, TRUCKS, ETC WILL BE PARKED.

CONTACT THE CMR VIA MINE PAGER PHONE, DIA PHONE, OR GYROPHONES OR BREATHING FROM THE CMR OPERATOR, PROCEED ON FOOT TO THE NEAREST EGRESS HOIST STATION.

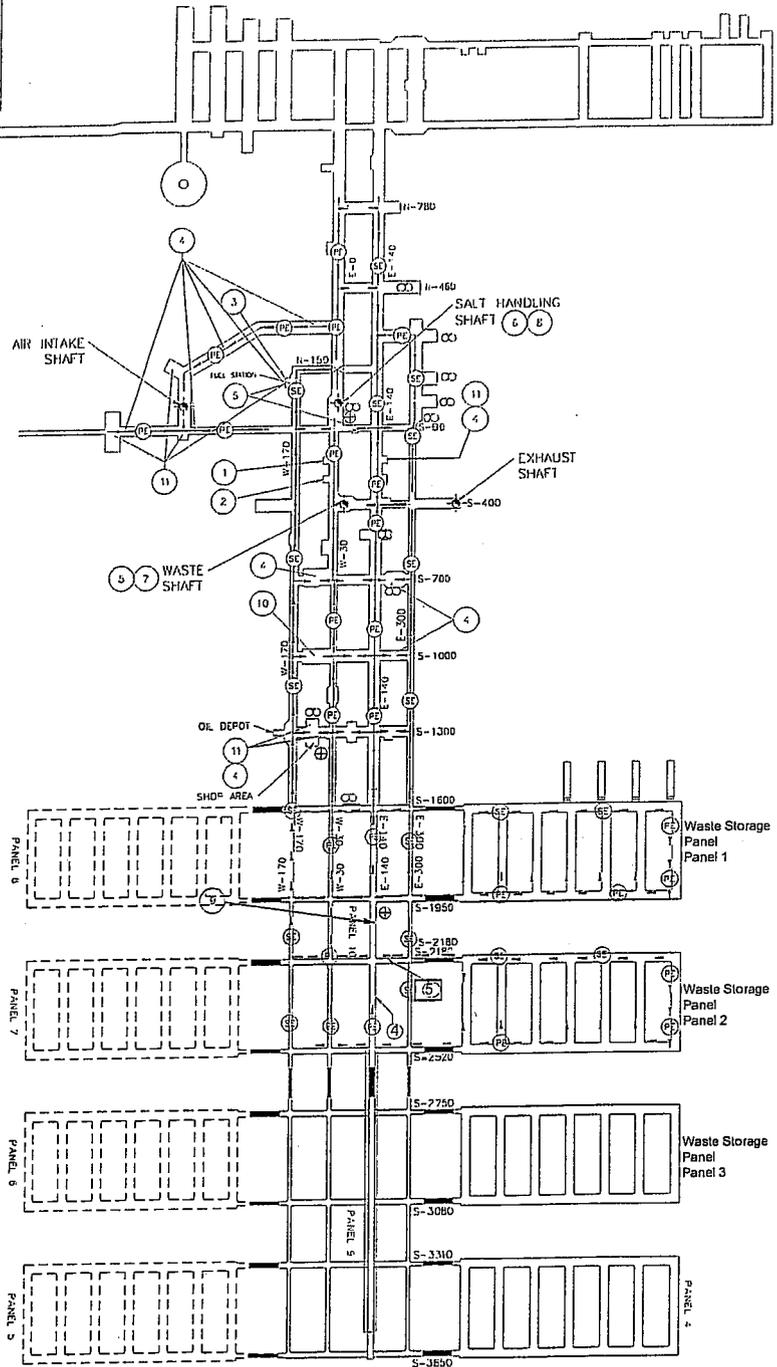

INFORMATION

PRIMARY ESCAPE - INTAKE AIR - GREEN REFLECTIVE MARKERS INDICATE YOU ARE HEADING TOWARD A SHAFT IN INTAKE AIR


SECONDARY ESCAPE - EXHAUST AIR - RED REFLECTIVE MARKERS INDICATE YOU ARE HEADING TOWARD A SHAFT BY EXHAUST AIR

WHITE REFLECTIVE MARKERS INDICATE YOU ARE IN INTAKE AIR OR EXHAUST AIR HEADING AWAY FROM A SHAFT

NOTE:
 SECONDARY ESCAPE ROUTE WILL ONLY BE USED UNTIL CLEAR ACCESS AT A BULKHEAD PAST THE BLOCKED AREA TO THE PRIMARY ACCESS ROUTE IS FOUND.

LEGEND

- PE - PRIMARY ESCAPEWAY
- SE - SECONDARY ESCAPEWAY
- UNPASSABLE BULKHEAD (PROHIBITED AREA)
- ⊕ VERTICAL SHAFT
- ⊗ OVERCAST
- ⊕ FIRST AID STATION (PHONE)
- ⊕ EYE WASH STATION
- ① AMBULANCE
- ② RESCUE TRUCK
- ③ DRY CHEMICAL SYSTEM
- ④ FIRE ALARM HAND SWITCH (PHONE)
- ⑤ FIRE ALARM PANEL
- ⑥ SH SHAFT UNDERGROUND STATION EMERGENCY AREA (PHONE)
- ⑦ WASTE SHAFT UNDERGROUND STATION ASSEMBLY AREA (PHONE)
- ⑧ SALT HANDLING SHAFT ASSEMBLY AREA (PHONE)
- ⑨ S-1950 & E-140 ASSEMBLY AREA (PHONE)
- ⑩ S-1000 ASSEMBLY AREA (PHONE)
- ⑪ THERMAL DETECTOR



EMERGENCY/ALARM RESPONSE

CONTACT CMR BY MINE PAGER PHONE OR GYROPHONE HANDSET OR
 CMR EXTENSION 8111

IDENTIFY TYPE OF EMERGENCY AND LOCATION

PERSONNEL REPORT TO THE NEAREST EGRESS HOIST STATION FOR UNDERGROUND EVACUATION

PERSONNEL REPORT TO THE NEAREST DESIGNATED ASSEMBLY AREA FOR OTHER SITE EMERGENCIES AND CMR ESCAPE ROUTE INSTRUCTIONS

DURING AN EMERGENCY/ALARM RESPONSE PERSON-IN-CHARGE IS THE U/G FE

Figure F-5
 Underground Emergency Equipment Locations and Underground Evacuation Routes

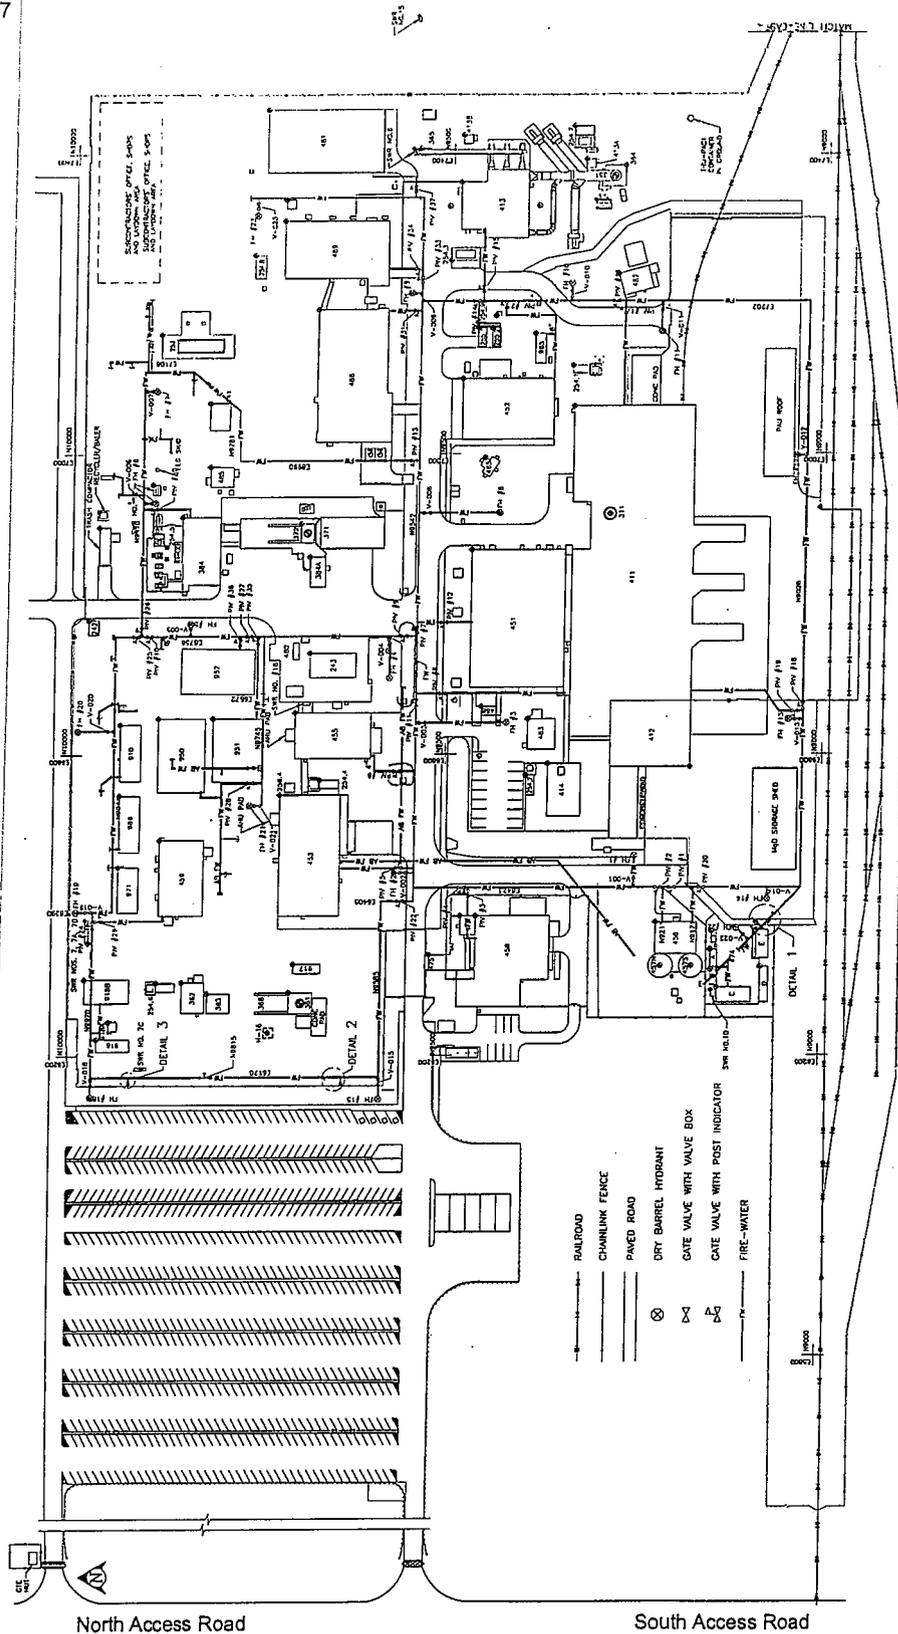


Figure F-6
 Fire-Water Distribution System

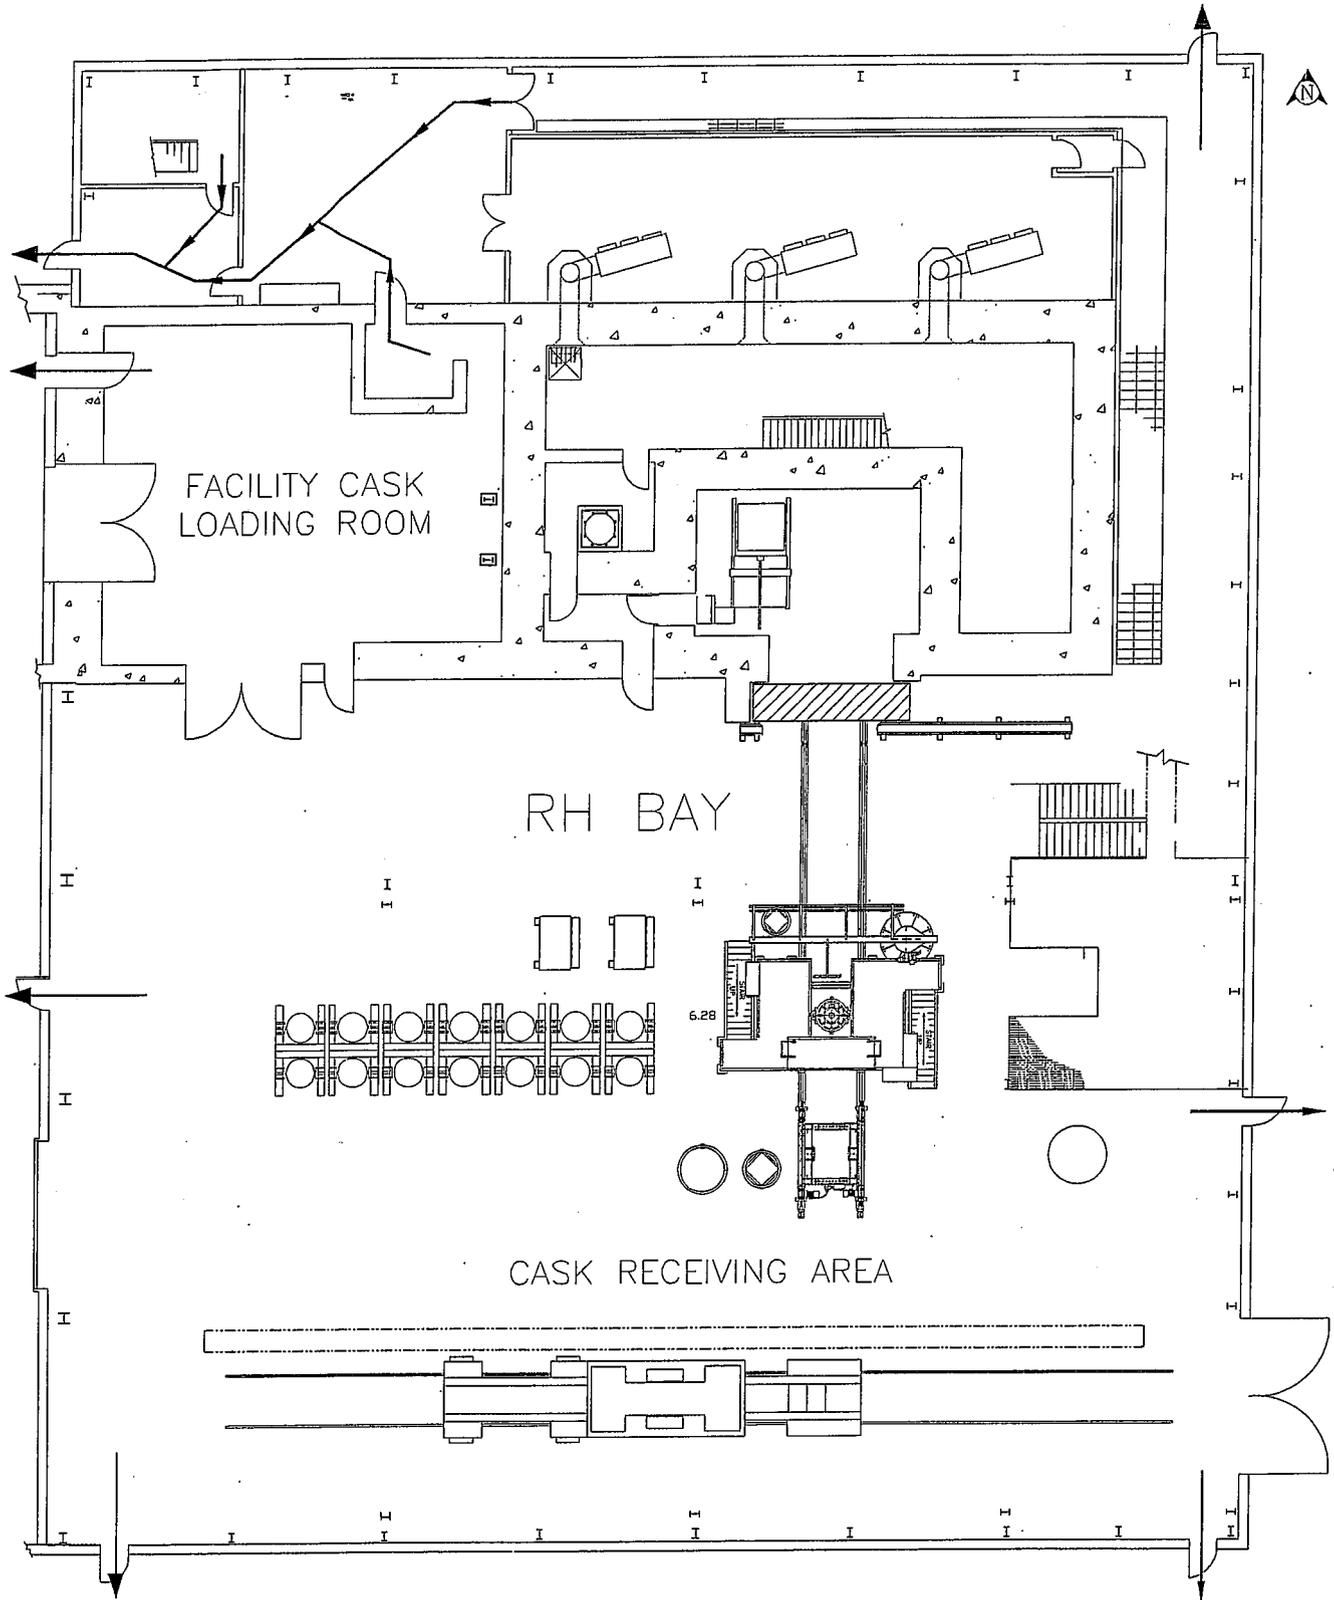


Figure F-8a
RH Bay Evacuation Routes

This illustration for information
Purposes Only.

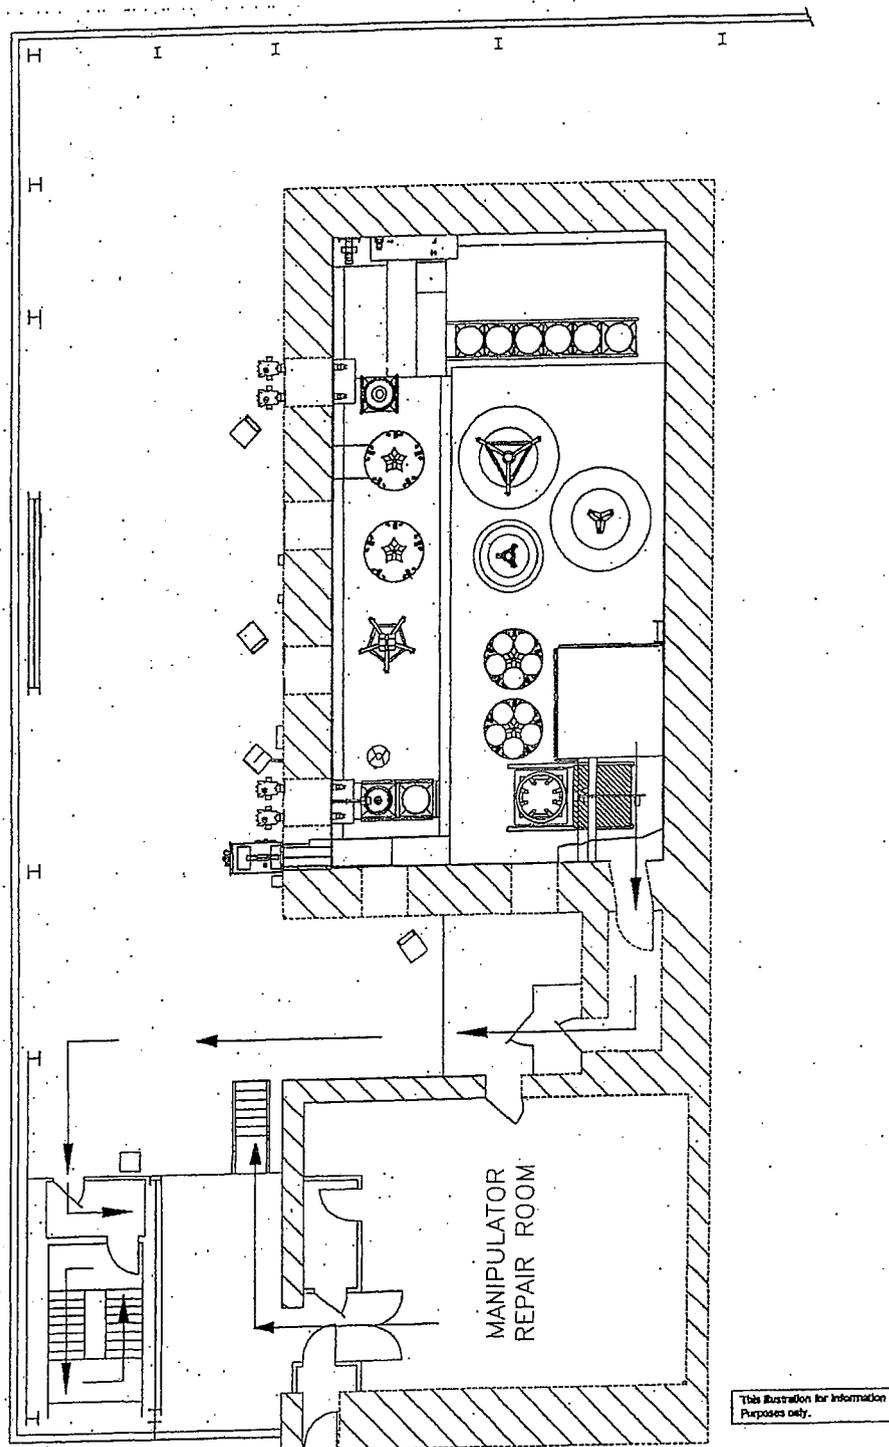


Figure F-8b
RH Bay Hot Cell Evacuation Route

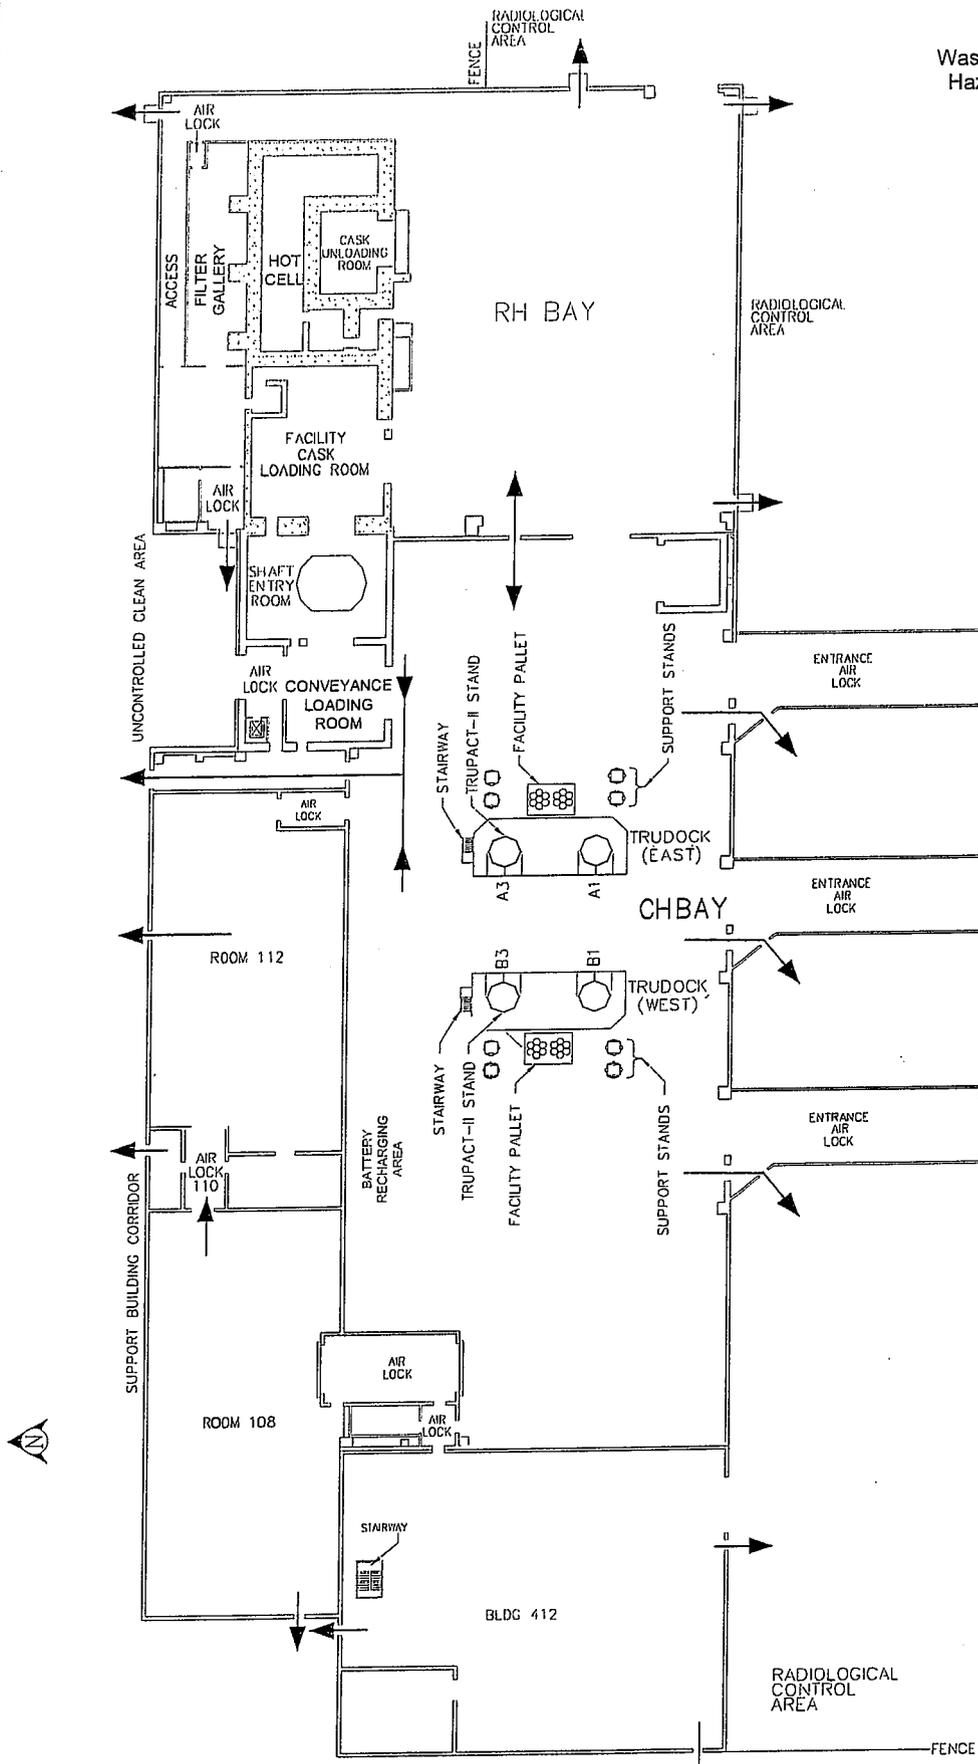


Figure F-8c
Evacuation Routes in the Waste Handling Building

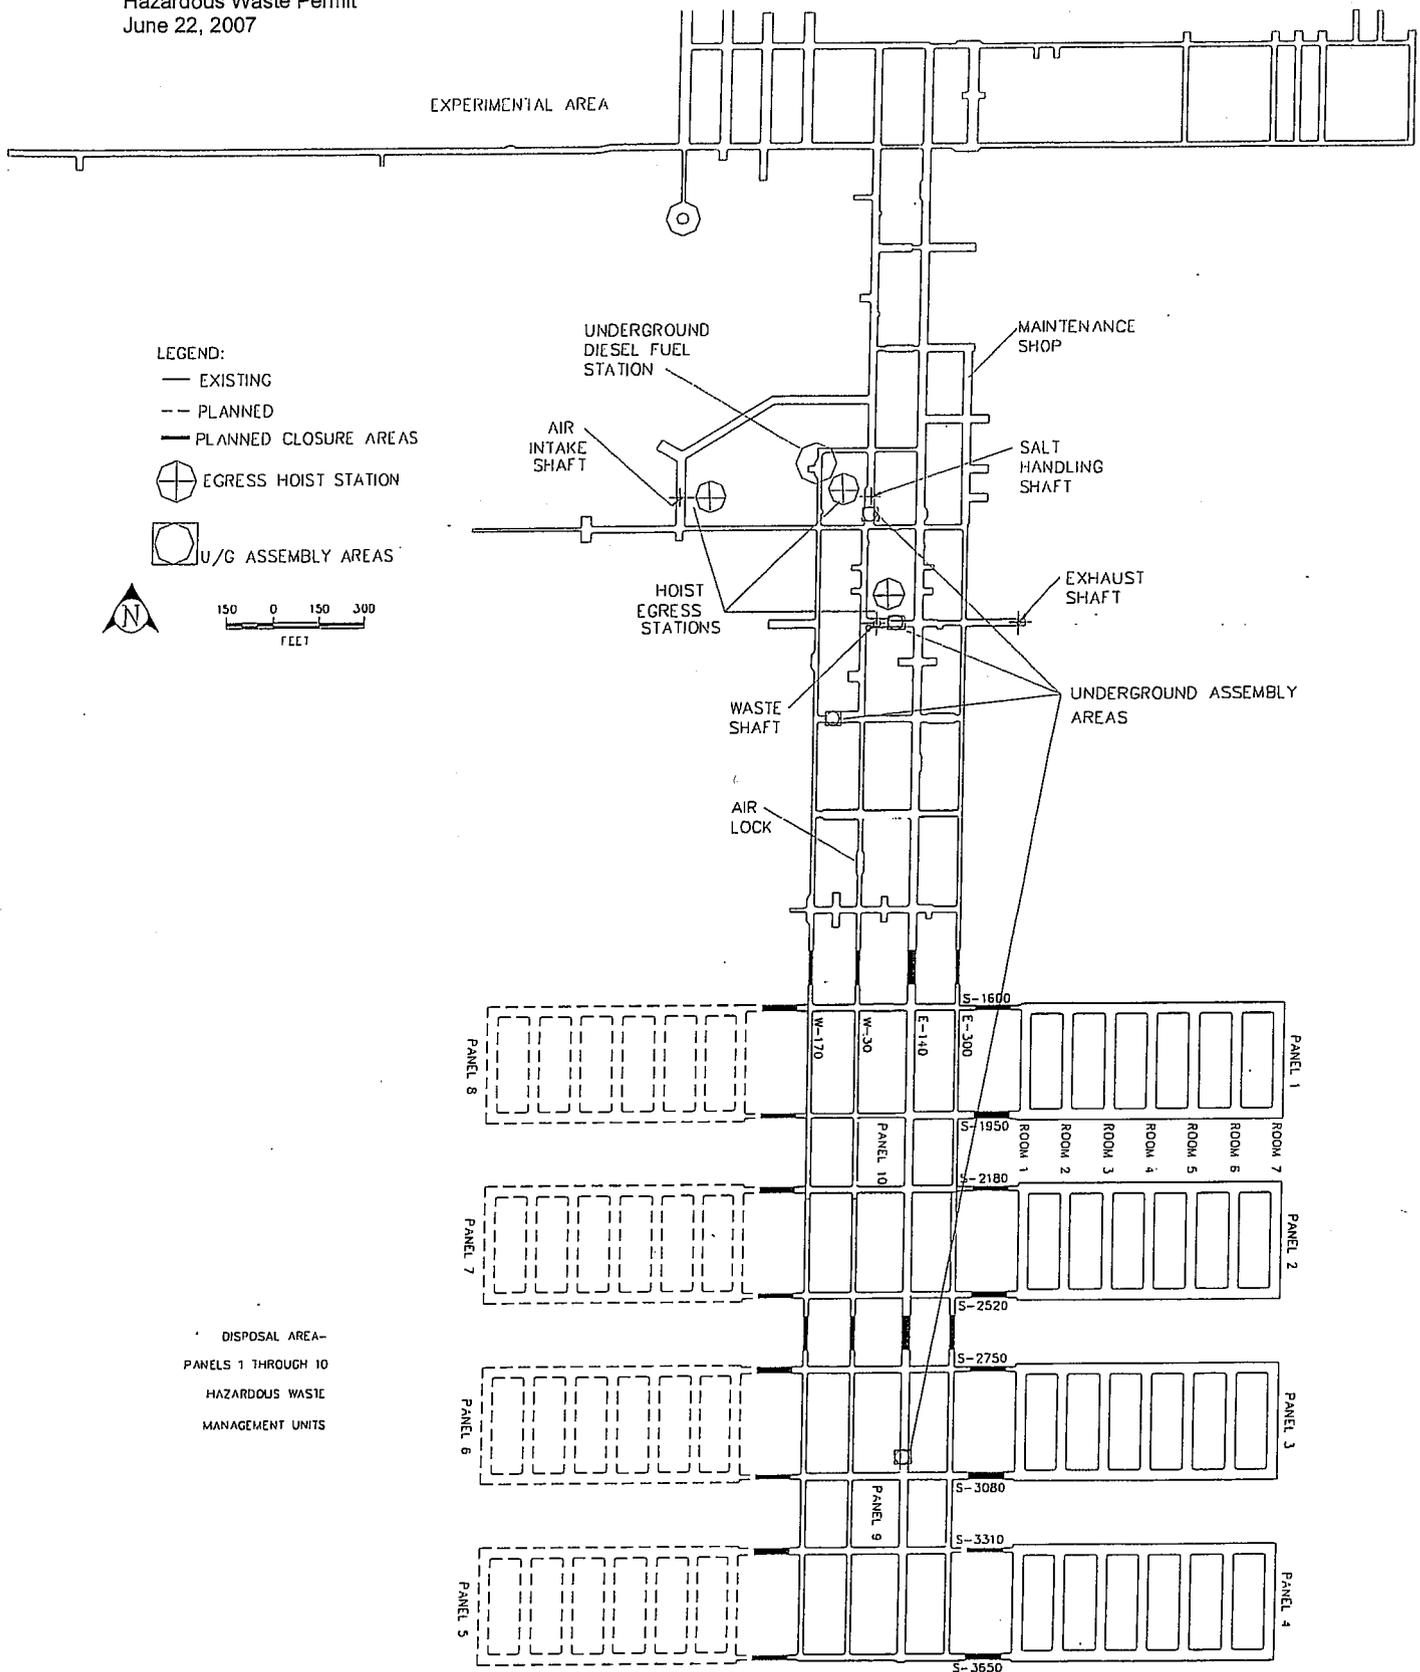




Figure F-9
 Designated Underground Assembly Areas

Pre-Fire Survey

- | | | |
|--|---|-----------------------------------|
| 1. Bldg. Name: <u>WASTE HANDLING BUILDING</u> |  | |
| 2. Address: <u>411 SITE</u> | | |
| 3. Occ. Type: <u>MAINTENANCE AND OPERATIONS PERSONNEL</u> | | |
| 4. Map #: <u>411-1</u> | | |
| 5. Roof Const.: <u>METAL</u> | | 6. Floor Const.: <u>CONCRETE</u> |
| 7. Date: <u>07/27/95</u> | | 8. Revision Date: <u>02/10/97</u> |
| 9. Surrounding Bldgs.: <u>412, 451, 452, 463</u> | | |
| 10. Fire Hydrants: <u>FH-#8 N, FH-#11 E, FH-#12 S, FH-#13 S,</u> | | |


LEGEND	
	ELECTRICAL PANEL
	FLAMMABLE CABINET
	THERMAL DETECTOR
	NON-SPRINKLERED AREA
	LADDER WITH OVERHEAD WALKWAY
	FIRE CONTROL PANEL
	SMOKE DETECTOR
	SPRINKLER RISER WITH F.D. CONNECTION
	COMP. GAS CYL.
	FENCE

411
 WASTE HANDLING BUILDING
 1ST FLOOR

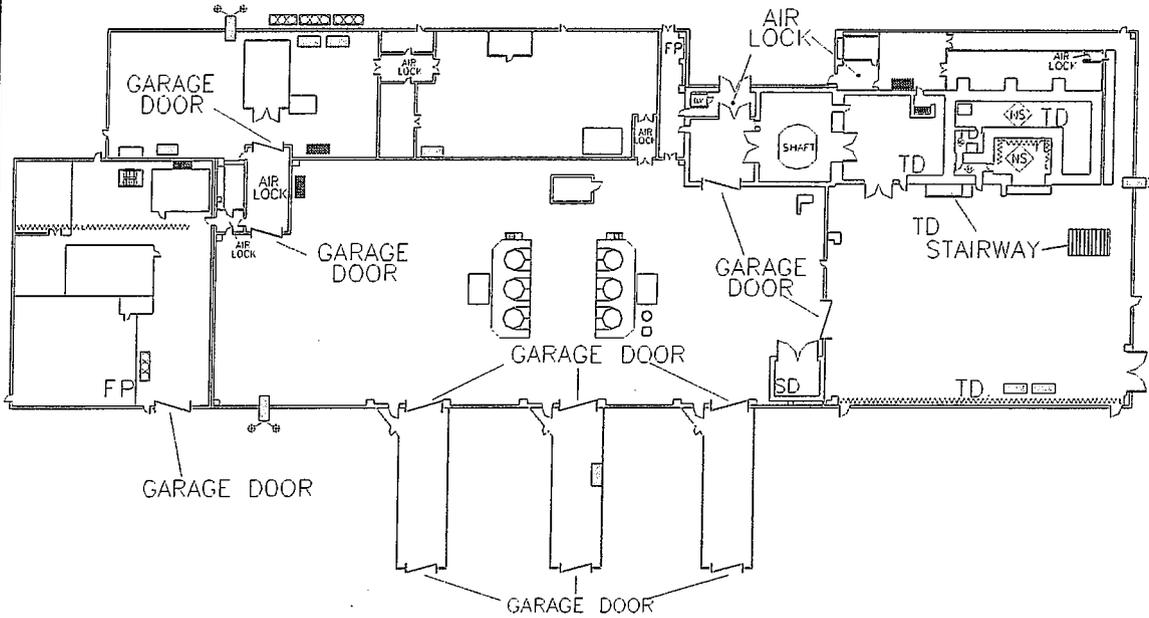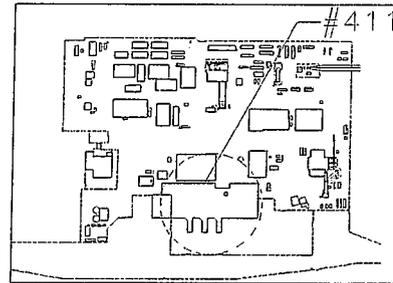

11. Comments: WATER SHUT-OFF AT PIV #8, PIV #17, PIV #19

Figure F-10
 Waste Handling Building Pre-Fire Survey (First Floor)

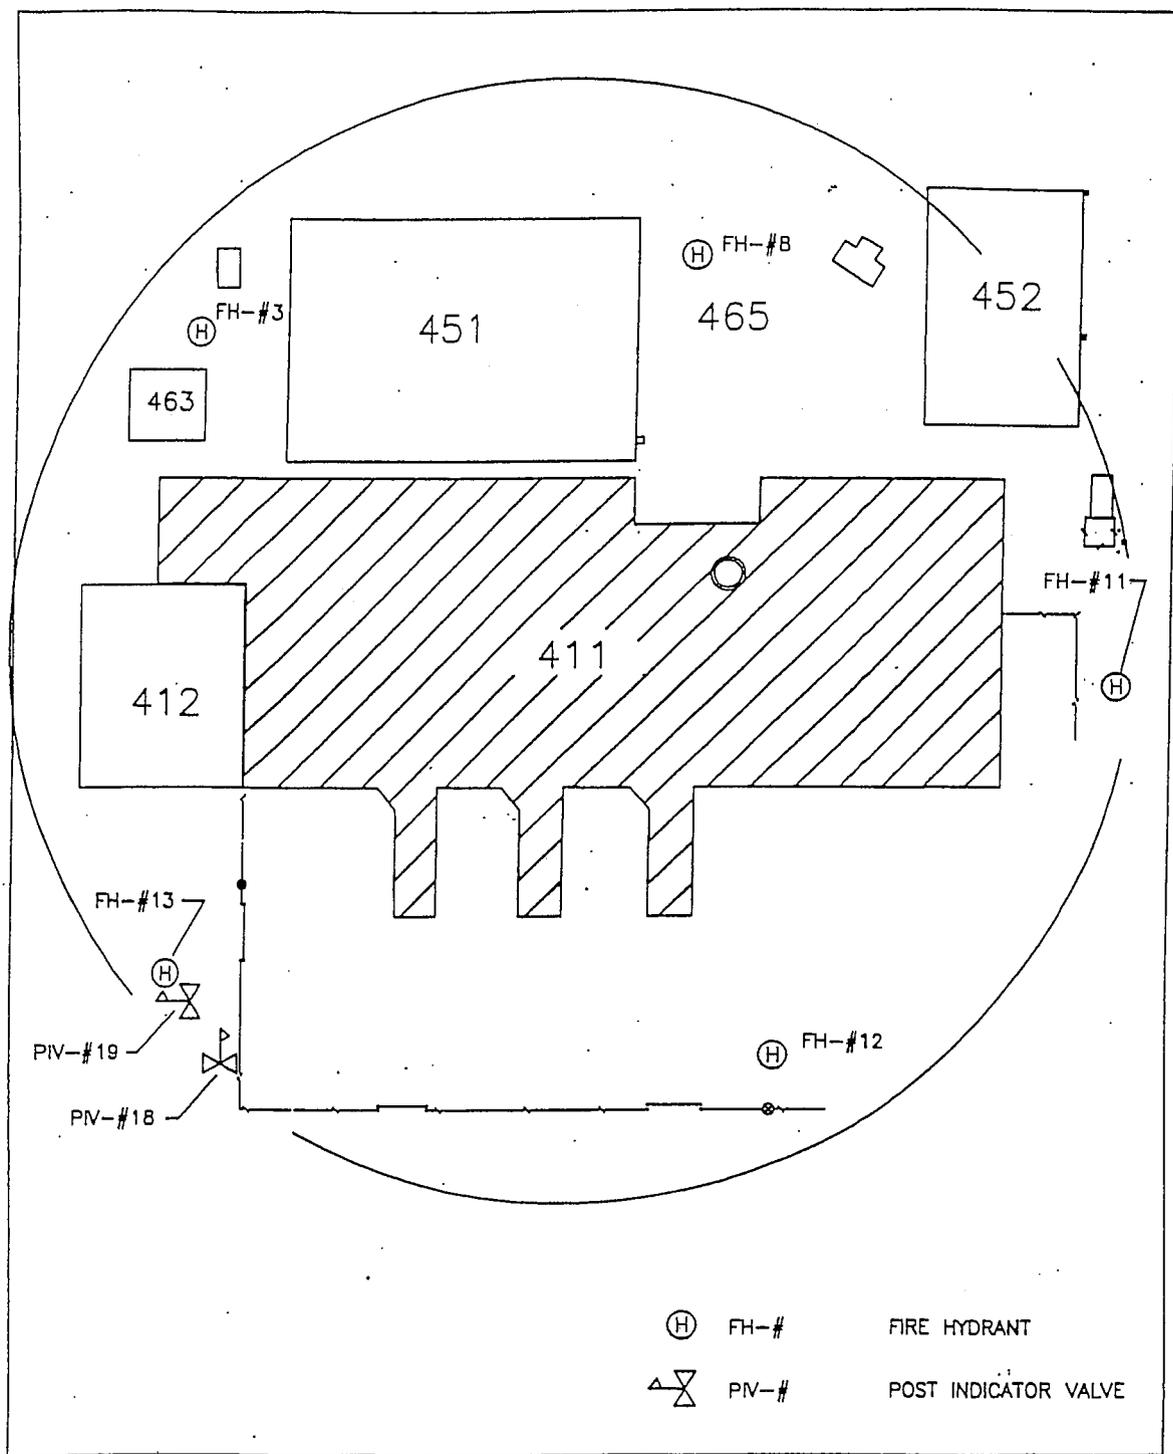

MAP #: 411-1

PAGE 2


REVISION DATE: 02/02/98

411-1-PFS

Figure F-10a
Waste Handling Building Pre-Fire Survey
(First Floor - Fire Hydrant/Post Indicator Location)


Pre-Fire Survey

- | | | |
|---|---|-----------------------------------|
| 1. Bldg. Name: <u>WASTE HANDLING BUILDING</u> |  | |
| 2. Address: <u>411 SITE</u> | | |
| 3. Occ. Type: <u>MAINTENANCE AND OPERATIONS PERSONNEL</u> | | |
| 4. Map #: <u>411-2</u> | | |
| 5. Roof Const.: <u>METAL</u> | | 6. Floor Const.: <u>CONCRETE</u> |
| 7. Date: <u>07/27/95</u> | | 8. Revision Date: <u>02/11/97</u> |
| 9. Surrounding Bldgs.: <u>412, 451, 452, 463</u> | | |
| 10. Fire Hydrants: <u>FH-#8 N, FH-#11 E, FH-#12 S, FH-#13 S</u> | | |

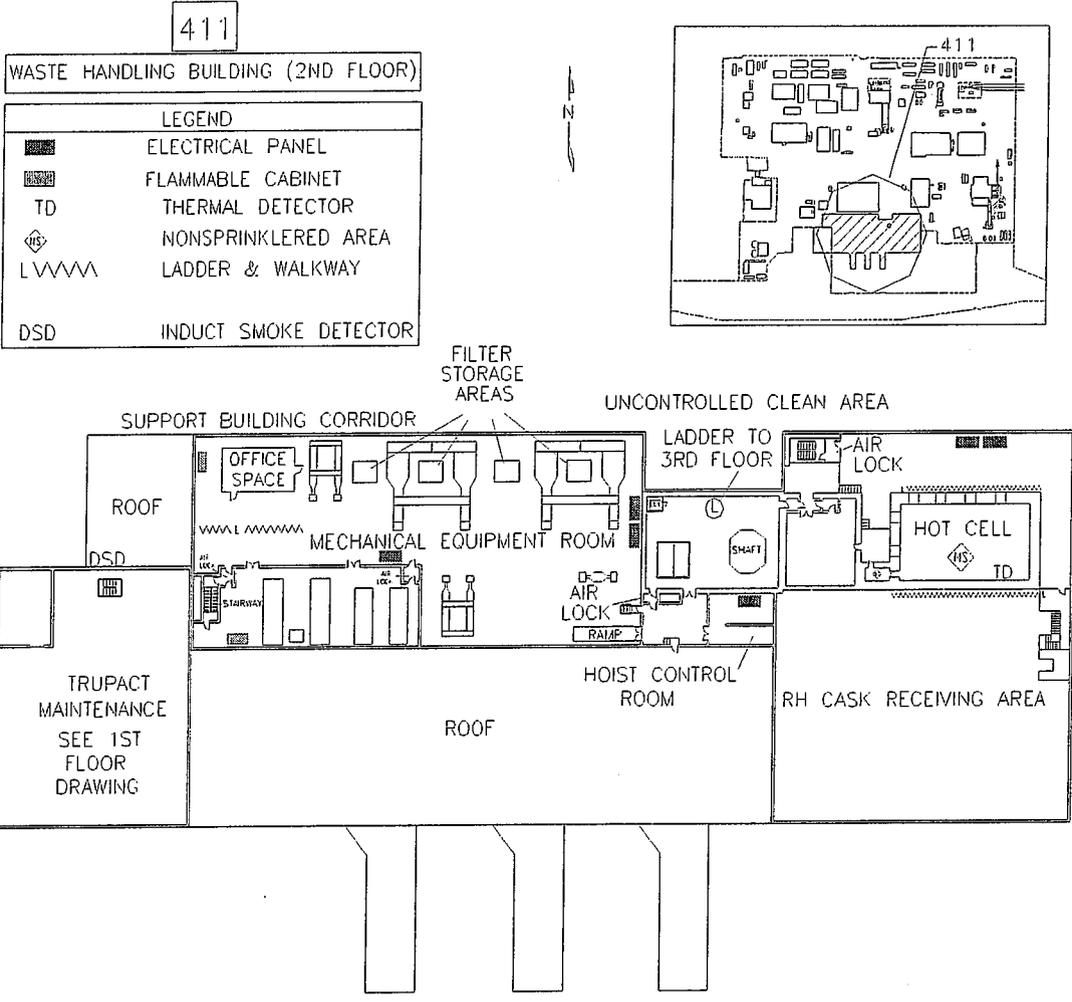

11. Comments: WATER SHUT-OFF AT PIV #8, PIV #17, PIV #19
-
-
-
-

Figure F-11
 Waste Handling Building Pre-Fire Survey (Second Floor)

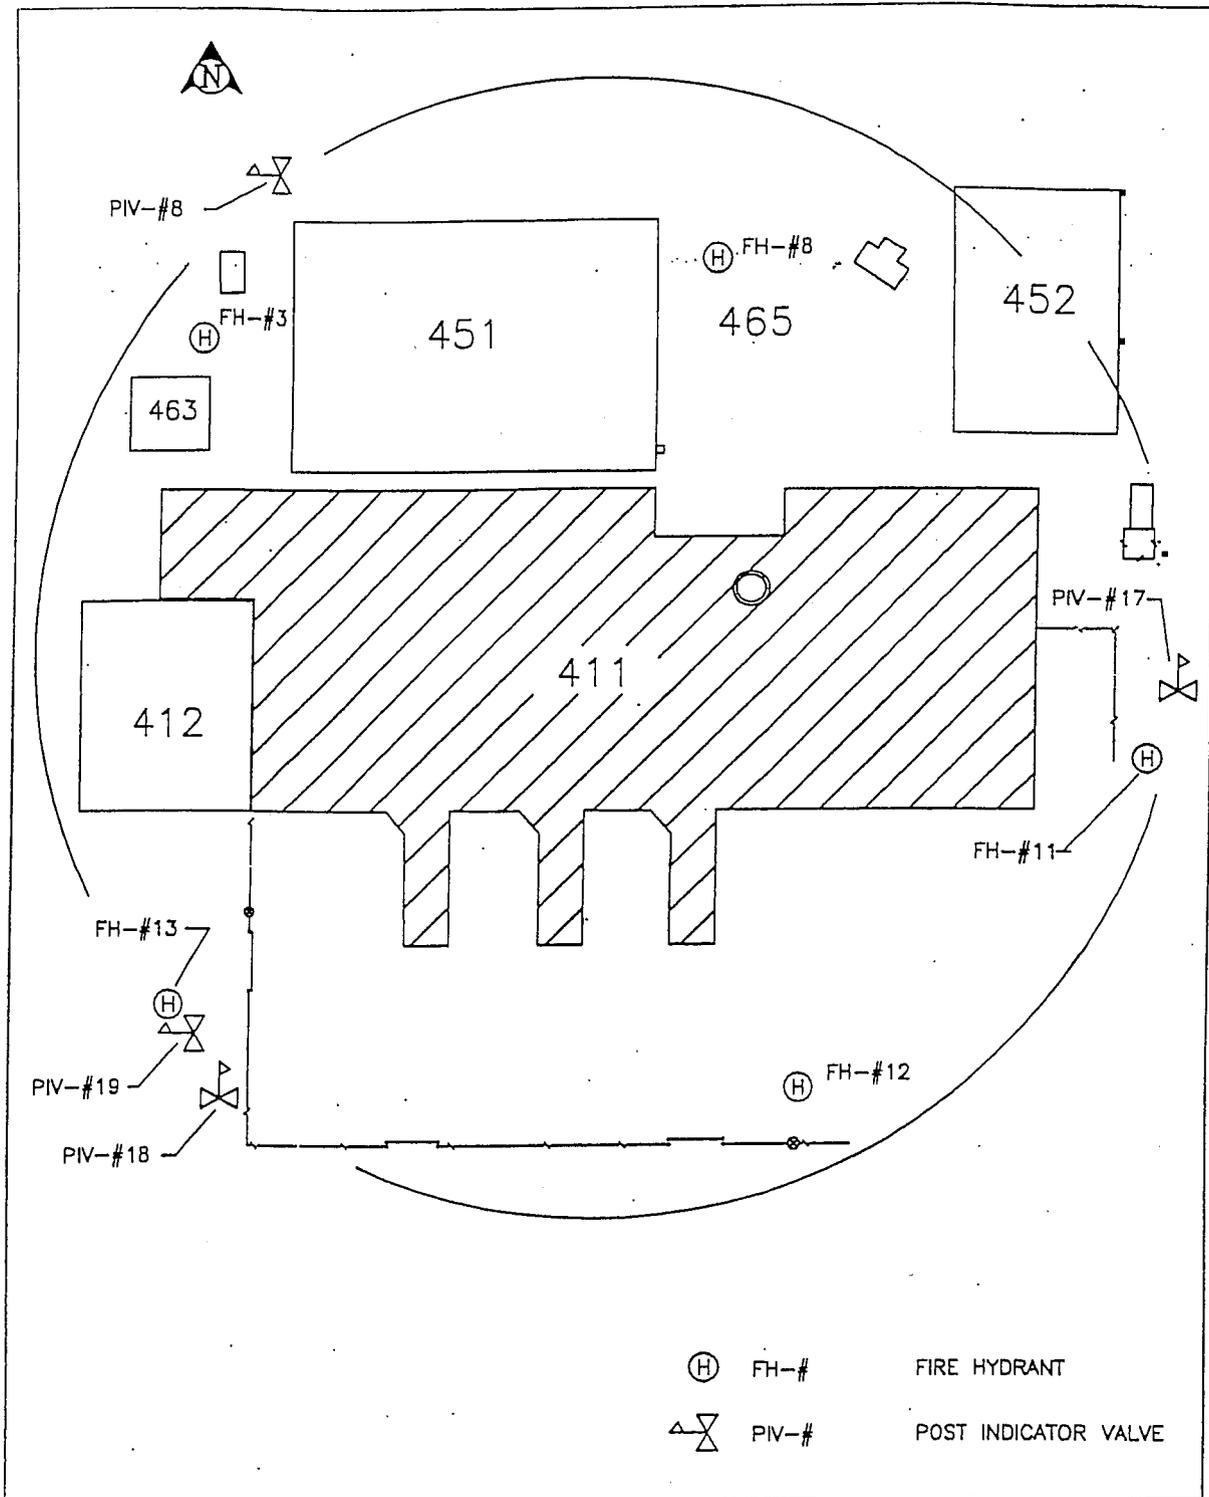

MAP #: 411-2

PAGE 2

REVISION DATE: 02/02/98

411-2-PFS

Figure F-11a
Waste Handling Building Pre-Fire Survey
(Second Floor - Fire Hydrant/Post Indicator Location)

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34

WIPP HAZARDOUS MATERIAL INCIDENT REPORT				
Date: _____ Location: _____				
I. INITIAL INFORMATION DATE: _____ TIME: _____				
EST: _____ REPORTED LOCATION: _____				
REPORTED BY: _____ DEPT.: _____				
INITIALLY REPORTED TO: _____ DEPT.: _____				
RESPONSIBLE MANAGER: _____ DEPT.: _____				
II. WEATHER CONDITIONS WIND DIRECTION _____ WIND SPEED: _____ mph TEMP.: _____ F				
CONDITIONS (i.e., icy, snowing, raining, cloudy, sunny): _____				
III. TYPE OF INCIDENT (SPILL, LEAK, ETC.): _____ Fire involved: [] YES [] NO				
(If fire is involved attach a copy of the fire report)				
<u>MATERIALS INVOLVED</u>	<u>UN/NA NO.</u>	<u>QUANTITY</u>	<u>HAZARD CLASS</u>	<u>NFPA CLASS</u>
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
IV. PERSONNEL INVOLVED IN CLEAN-UP ACTIVITIES				
<u>PERSONNEL/DEPT</u>		<u>DECON METHOD/MEDICAL TREATMENT</u>		
_____	_____	_____		
_____	_____	_____		
_____	_____	_____		
_____	_____	_____		
_____	_____	_____		
_____	_____	_____		
_____	_____	_____		
_____	_____	_____		
V. PERSONNEL CONTAMINATED NOT INVOLVED IN THE CLEANUP ACTIVITIES				
<u>PERSONNEL/DEPT.</u>	<u>MATERIAL CONTACTED</u>	<u>DECON/MEDICAL TREATMENT</u>		
_____	_____	_____		
_____	_____	_____		
_____	_____	_____		

Figure F-12
 WIPP Hazardous Materials Incident Report, Page 1 of 3

 PERMIT ATTACHMENT F
 Page F-91 of 96

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31

WIPP HAZARDOUS MATERIAL INCIDENT REPORT			
Date: _____		Location: _____	
IX. INITIAL NOTIFICATION BY CMRO			
<u>DEPARTMENT</u>	<u>PERSON CONTACTED</u>	<u>TIME</u>	<u>NOTIFIED BY</u>
Facility Ops (FSM) _____	_____	_____	_____
Emerg. Mgmt (EST) _____	_____	_____	_____
EC _____	_____	_____	_____
Industrial Safety _____	_____	_____	_____
Facility Ops. (FM/FMD) _____	_____	_____	_____
_____	_____	_____	_____
_____	_____	_____	_____
CMRO: _____			
Print name	Signature	Date	
FSM: _____			
Print name	Signature	Date	
X. CONTINGENCY PLAN IMPLEMENTATION			
Contingency Plan implemented []YES []NO			
FSM: _____			
Print name	Signature	Date	
XI. REVIEWS			
Report submitted by: _____			
Print name	Signature	Date	
Emergency Management Manger: _____			
Print name	Signature	Date	
EC Manager: _____			
Print name	Signature	Date	
COMMENTS: _____			


Figure F-12 (Continued)
 WIPP Hazardous Materials Incident Report, Page 3 of 3

(This page intentionally blank)

1

DRAWINGS

(This page intentionally blank)

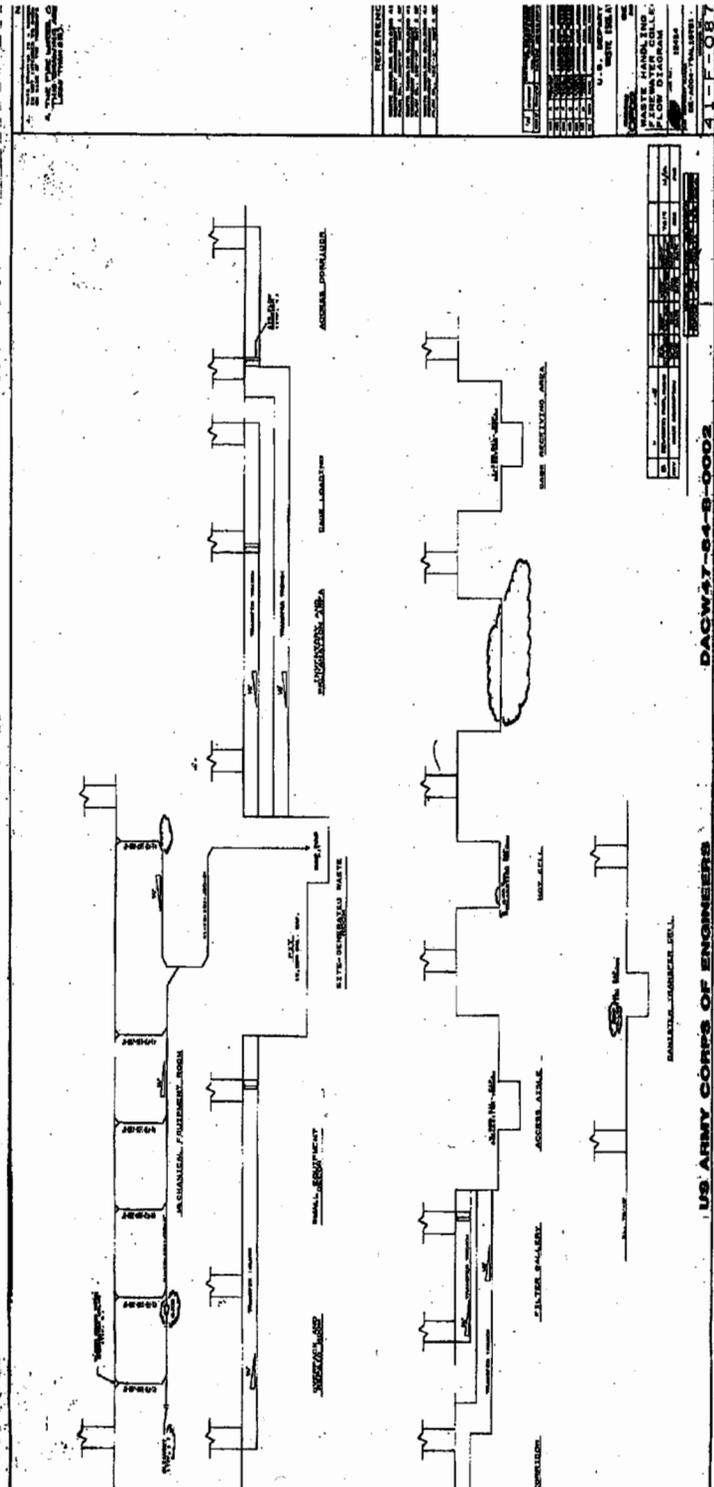

41-F-087-014 Waste Handling Building 411 Fire Water Collection System Flow Diagram