

ATTACHMENT G.14
TECHNICAL AREA 54, AREA G, BUILDING 33
INDOOR CONTAINER STORAGE UNIT
CLOSURE PLAN

DRAFT

TABLE OF CONTENTS

LIST OF TABLES	iv
LIST OF FIGURES	v
1.0 INTRODUCTION	1
2.0 DESCRIPTION OF UNIT TO BE CLOSED	1
3.0 ESTIMATE OF MAXIMUM WASTE STORED	2
4.0 GENERAL CLOSURE REQUIREMENTS	2
4.1 Closure Performance Standard	2
4.2 Closure Schedule	3
5.0 CLOSURE PROCEDURES	3
5.1 Removal of Waste	3
5.2 Records Review and Structural Assessment	4
5.2.1 Records Review	4
5.2.2 Structural Assessment	4
5.3 Decontamination and Removal of Equipment and Structures	4
5.3.1 Removal of Structures and Related Equipment	4
5.3.2 Decontamination of Surfaces, Structures, and Related Equipment	5
5.4 Equipment Used During Decontamination Activities	5
6.0 SAMPLING AND ANALYSIS PLAN	5
6.1 Soil Sampling and Decontamination Verification Wipe Sampling Activities	6
6.2 Sample Collection Procedures	6
6.2.1 Liquid Sampling	7
6.2.2 Wipe Sampling	7
6.2.3 Soil Sampling	7
6.2.4 Cleaning of Sampling Equipment	7
6.3 Sample Management Procedures	7
6.3.1 Sample Documentation	8
6.3.1.1 Chain-of-Custody	8
6.3.1.2 Sample Labels and Custody Seals	8
6.3.1.3 Sample Logbook	9
6.3.2 Sample Handling, Preservation, and Storage	9
6.3.3 Packaging and Transportation of Samples	9
6.4 Sample Analysis Requirements	10
6.4.1 Analytical Laboratory Requirements	10
6.4.1.1 Quality Assurance/Quality Control	10
6.4.1.2 Field Quality Control	10
6.4.1.3 Analytical Laboratory QC Samples	11
6.4.2 Data Reduction, Verification, Validation, and Reporting	11

6.4.3 Data Reporting Requirements 11
7.0 WASTE MANAGEMENT 11
8.0 CLOSURE CERTIFICATION REPORT 11
9.0 REFERENCES 11

DRAFT

LIST OF TABLES

<u>TABLE NO.</u>	<u>TITLE</u>
G.14-1	Closure Schedule for the TA-54 Area G, Building 33 Indoor Container Storage Unit
G.14-2	Potential Waste Materials, Waste Types, and Disposal Options
G.14-3	Summary of Analytical Methods
G.14-4	Sample Containers, Preservation Techniques, and Holding Times
G.14-5	Quality Control Sample Types, Applicable Analyses, Frequency, and Acceptance Criteria
G.14-6	List of Equipment at the Technical Area 54 Area G, Building 33 Indoor Container Storage Unit

LIST OF FIGURES

<u>FIGURE NO.</u>	<u>TITLE</u>
G.14-1	Technical Area 54, Area G, Building 33, Indoor Container Storage Unit Grid Sampling and Additional Sampling Locations

DRAFT

1.0 INTRODUCTION

This closure plan describes the activities necessary to close the indoor hazardous waste container storage unit at Technical Area (TA)-54, Area G, Building 33 (Drum Preparation Facility) at the Los Alamos National Laboratory (Facility), hereinafter referred to as the permitted unit. The information provided in this closure plan addresses the closure requirements specified in Permit Part 9 and the Code of Federal Regulations (CFR), Title 40, Part 264, Subparts G and I for hazardous waste management units operated at the Facility under the Resource Conservation and Recovery Act (RCRA) and the New Mexico Hazardous Waste Act.

Until closure is complete and has been certified in accordance with Permit Section 9.5, a copy of the approved closure plan or the hazardous waste facility permit containing the plan, any approved revisions to the plan, and closure activity documentation associated with the closure will be on file with hazardous waste compliance personnel at the Facility and at the U.S. Department of Energy (DOE) Los Alamos Site Office. Prior to closure of a specific unit, this closure plan may be amended in accordance with Permit Section 9.4.8 to provide updated sampling and analysis plans and to incorporate updated decontamination technologies. Amended closure plans shall be submitted to the New Mexico Environment Department (Department) for approval prior to implementing closure activities.

2.0 DESCRIPTION OF UNIT TO BE CLOSED

A specific description of the permitted unit can be found in Permit Attachment A (*Technical Area Unit Descriptions*). Additional features and equipment located at the permitted unit and not discussed elsewhere within the Permit are described below.

The permitted unit, which is located in the north-central portion of Area G, consists of a storage dome with an attached concrete-block building (Building 33) both of which are situated on an eight inch thick concrete pad surrounded on the south central portion by an asphalt apron. The concrete pad overlies six inches of base course. The permitted unit is used for waste storage and preparation activities for transuranic and mixed transuranic waste destined for shipment to the Waste Isolation Pilot Plant for disposal.

The dome, which is 157 feet (ft) long and 50 ft wide, with a peak height of 24 ft, is built of an aluminum framework of trusses covered with tension-fitted ultraviolet resistant, fire-retardant coated, polyester fabric. The dome's aluminum frame is directly connected to Building 33, which extends approximately five ft into the dome. The concrete-block building attached to the dome is approximately 40 ft long and 34 ft wide. Two personnel doors are located in Building 33; one on the west side and one on the east side. Two overhead doors are located on the north side of the building to allow free movement of personnel and container-handling equipment between the building and the dome. The area of the dome and the building totals approximately 8,570 square ft.

The interior perimeter of the dome is surrounded with a 6-inch-high, 8-inch-wide concrete curb to prevent run-on and runoff. The concrete pad in the dome is also sloped to a 6-inch-wide centralized concrete drainage trench that is covered with 12-inch-wide steel grating. The trench slopes toward a steel sump located at the east end of the dome. The rooms in the attached building contain drains that are connected to this main drainage system. Two additional trenches located in the two storage rooms in Building 33 are perpendicular to, and drain into, the main trench. The concrete floors of these rooms also slope inward to prevent runoff.

The central drainage trench in the dome connects to a sump in the eastern end of the dome. The steel sump is located within a concrete basin and is approximately 14 ft long by 6.5 ft wide by 5 ft deep with a capacity of 3,473 gallons. A primary holding tank, associated with the sump, is located in a concrete basin that is 15 ft long by 12 ft wide by 5.5 ft deep and has a capacity of approximately 7,405 gallons. A secondary holding tank associated with the sump is located in a separate concrete basin that is 12 ft long by 12 ft wide by 5.5 ft deep and has a capacity of approximately 5,924 gallons. The basins are designed to contain any spills or leaks resulting from potential overflow or breach of the holding tanks.

Permit Part 3 (*Storage in Containers*), Permit Attachment A (*Technical Area Unit Descriptions*), Permit Attachment B (*Part A Application*), and Permit Attachment C (*Waste Analysis Plan*) include information regarding waste management procedures and hazardous waste constituents stored at the permitted unit.

3.0 ESTIMATE OF MAXIMUM WASTE STORED

Approximately 515,550 gallons of waste has been stored in the permitted unit. Throughout the life of this Permit it is estimated that a total of 649,500 gallons of waste will be stored in the permitted unit.

4.0 GENERAL CLOSURE REQUIREMENTS

4.1 Closure Performance Standard

As required by Permit Section 9.2, the permitted unit will be closed to meet the following performance standards:

- a. remove all hazardous waste residues and hazardous constituents;
- b. ensure contaminated media do not contain concentrations of hazardous constituents greater than the clean-up levels established in accordance with Permit Sections 11.4 and 11.5. For soils the cleanup levels shall be established based on residential use. The Permittees must also demonstrate that there is no potential to contaminate groundwater;
- c. control hazardous waste residues, hazardous constituents, and, as applicable, contaminated media such that they do not exceed a total excess cancer risk of 10^{-5} for carcinogenic substances and, for non-carcinogenic substances, a target Hazard Index of 1.0 for human receptors, and meet Ecological Screening Levels established under Permit Section 11.5;
- d. minimize the need for further maintenance;
- e. control, minimize, or eliminate, to the extent necessary to protect human health and the environment, the post-closure escape of hazardous waste, hazardous constituents, leachate, contaminated runoff, or hazardous waste decomposition products to the ground, groundwater, surface waters, or to the atmosphere; and
- f. comply with the closure requirements of Permit Part 9 (*Closure*) and 40 CFR Part 264 Subparts G and I.

Closure of the permitted unit will be deemed complete when: 1) all surfaces and equipment have been decontaminated, or otherwise properly disposed of; 2) closure has been certified by an independent, professional engineer licensed in the State of New Mexico; and 3) closure certification has been submitted to and approved by the Department.

4.2 Closure Schedule

This closure plan is intended to address the closure requirements for the permitted unit within the authorized timeframe of the current Hazardous Waste Facility Permit (*see* Permit Section 9.4). The following section provides the schedule of closure activities (*see also* Table G.14-1 in this closure plan).

Notification of closure will occur at least 45 days before the Permittees expect to begin closure (*see* 40 § CFR 264.112(d)(1)) and closure activities will begin according to the requirements of 40 § CFR 264.112(d)(2)). However, pursuant to 40 CFR § 264.112(e), removing hazardous wastes and decontaminating or dismantling equipment in accordance with an approved closure plan may be conducted at any time before or after notification of closure. Notification of the structural assessment (assessment), as described in Section 5.2 of this closure plan, shall occur in accordance with Permit Section 9.4.6.2.

Within 90 days after the final receipt of hazardous waste, the permitted unit will be emptied of all stored waste. Within ten days of completing hazardous waste removal or within 100 days of the final receipt of hazardous waste, the Permittees will complete the records review (review) and assessment and submit an amended closure plan, if necessary, to the Department for review and approval as a permit modification in accordance with Permit Section 9.4.8. Upon approval of a modified closure plan, if applicable, the Permittees will decontaminate unit surfaces and related equipment.

Soil sampling and decontamination verification wipe sampling activities will be conducted to demonstrate that soils, surfaces, and related equipment at the permitted unit meet the closure performance standards in Permit Section 9.2.

All closure activities, including submittal of a final closure certification report to the Department for review and approval, will be completed within 180 days after the final receipt of waste. In the event that closure of the permitted unit cannot proceed according to schedule, the Permittees will notify the Department in accordance with the extension request requirements in Permit Section 9.4.1.1.

5.0 CLOSURE PROCEDURES

Closure activities at the permitted unit will include: removal of hazardous wastes; proper management and disposal of hazardous waste residues and contaminated structures and equipment associated with the permitted unit; verification that the closure performance standards in Permit Section 9.2 have been achieved; and submittal of a final closure certification report. The following sections describe closure activities applicable to the permitted unit.

5.1 Removal of Waste

In accordance with Permit Section 9.4.2, all stored hazardous wastes will be removed from the permitted unit scheduled for closure. Depending upon their size, containers will be removed with forklifts, container dollies, air pallets, or manually. Containers will be placed on flat bed trucks, trailers, or other appropriate vehicles for transport from the permitted unit. Appropriate shipping documentation will be prepared for the wastes during transport. Containers holding hazardous wastes will be moved to a permitted on-site storage unit or a permitted off-site treatment, storage, or disposal facility.

5.2 Records Review and Structural Assessment

After waste removal and before starting closure decontamination and sampling activities, the Facility Operating and Inspection Records for the permitted unit will be reviewed and an assessment will be conducted to determine any previous finding(s) or action(s) that may influence closure activities or potential sampling locations.

5.2.1 Records Review

The Facility Operating and Inspection Records shall be reviewed in accordance with Permit Section 9.4.6.1. The goals of the review will be to:

- a. confirm the specific hazardous waste constituents of concern; and
- b. confirm additional sampling locations (*e.g.*, locations of any spills or chronic conditions identified in the Operating and Inspection Records).

5.2.2 Structural Assessment

An assessment of the permitted unit's physical condition will be conducted in accordance with Permit Section 9.4.6.2. The assessment will include inspecting the floor and walls of the concrete-block room as well as the floor in the dome for any existing cracks or conditions that indicate a potential for, or an actual, release of constituents. If a crack, gap, or stained area is present, the Permittees will amend this closure plan in order to update the sampling and analysis plan (SAP) (*see* Section 6.0 of this closure plan) to add these sampling locations and the applicable sampling methods and procedures. This inspection will be documented with photographs and drawings, as necessary.

5.3 Decontamination and Removal of Equipment and Structures

In accordance with the procedures in Permit Section 9.4.3, all remaining hazardous waste residues and hazardous constituents will be removed from the permitted unit. The permitted unit's surfaces and related equipment will be decontaminated, removed, or both and managed appropriately. All waste material will be controlled, handled, characterized, and disposed of in accordance with Permit Attachment C (*Waste Analysis Plan*), Permit Section 9.4.5, and Facility waste management procedures. Decontamination activities will ensure the removal of all hazardous waste residues and hazardous constituents from the permitted unit to meet the closure performance standards outlined in Permit Section 9.2.

5.3.1 Removal of Structures and Related Equipment

All surfaces and related equipment that are removed will not require decontamination, will be considered solid and potentially hazardous waste (as defined by this Permit) when removed, and will be disposed of in accordance with Permit Section 9.4.5 and Section 7.0 of this closure plan.

The following structures and related equipment will be removed before the assessment: the dome; the aluminum beams, trusses, and ancillary equipment supporting the dome; and the walls and metal roof of the attached concrete-block building. The following structures and related equipment will be removed after the structural assessment: the concrete pad; any materials associated with the concrete pad (*e.g.*, concrete ringwall, sump structures, asphalt, curbing, base course, soil underlying pad); the floor of the attached building; and any surrounding asphalt.

If after the removal of the pad (and underlying soil and base course material) the remaining surface shows evidence that the removal to that point has not gathered all appropriate soils and materials associated with the pad, additional soil and materials will be removed. If it is determined to be appropriate at the time of the assessment, soil samples may be collected through the asphalt (before the pad and its materials have been removed) from areas where contamination is suspected (*i.e.*, locations of stains or known spills).

In the event that alternative closure requirements, in accordance Permit Section 9.2.2.2, are applied to the closure of this permitted unit, the Permittees shall take precautions to not remove or disturb the soil or tuff that overlies the regulated unit (covered under the March 1, 2005 Compliance Order on Consent (Order) (*see* Permit Section 9.3)) beneath the permitted unit.

5.3.2 Decontamination of Surfaces, Structures, and Related Equipment

All surfaces and related equipment that will be reused by the Facility will be decontaminated in accordance with Permit Section 9.4.3.1. Decontamination of the permitted unit's surfaces will include all features located within the unit. This includes: the tanks; the equipment cabinets; the drum venting equipment; the portable air monitors; the electronic devices or tools; and spill cleanup equipment containers. The list of equipment requiring decontamination may be revised during the review and assessment which would result in an amendment to this closure plan.

Equipment and operating machinery that is not sensitive to water intrusion, such as the tanks and equipment cabinets, will be decontaminated by pressure washing or steam cleaning with a solution consisting of a surfactant detergent (*e.g.*, Alconox®) and water and mixed in accordance with the manufacturer's recommendation. All other equipment at the permitted unit that is sensitive to water intrusion (*i.e.*, drum venting equipment, portable air monitors, electronic devices or tools, spill cleanup equipment containers) will be decontaminated by washing using a wipe-down method with a solution consisting of a surfactant detergent (*e.g.*, Alconox®) and water mixed in accordance with the manufacturer's recommendations.

The quantity of the wash solution will be minimized by dispensing from buckets, spray bottles, or other types of containers. Cloths, or other absorbent cleaning devices, will not be reused to wipe down the equipment after being wetted in the wash solution or after spraying solution onto the equipment. Portable berms or other such devices (*e.g.*, absorbent socks, plastic sheeting, wading pools, existing secondary containment) will collect excess wash water and provide containment during the decontamination process.

5.4 Equipment Used During Decontamination Activities

Reusable protective clothing, tools, and equipment used during closure activities will be cleaned with a wash water solution. Residue, disposable equipment, and equipment that cannot be decontaminated will be containerized and managed as waste as summarized in Table G.14-2 and in accordance with Permit Section 9.4.5 and Section 7.0 of this closure plan.

6.0 SAMPLING AND ANALYSIS PLAN

This sampling and analysis plan addresses the specific requirements in Permit Section 9.4.7 and describes the sampling, analysis, and quality assurance/quality control (QA/QC) methods that will be used to demonstrate that the Permittees have met the closure performance standards outlined in Permit Section 9.2.

6.1 Soil Sampling and Decontamination Verification Wipe Sampling Activities

Soil sampling and decontamination verification wipe sampling activities will be conducted at the permitted unit in order to verify that the soils, surfaces, and related equipment at the permitted unit meet the closure performance standards in Permit Section 9.2. All samples will be collected and analyzed in accordance with the procedures in Sections 6.2, 6.3, and 6.4 of this closure plan.

One wipe sample will be collected from each piece of decontaminated equipment related to the permitted unit. In compliance with Permit Section 9.4.7.1.ii.a, this closure plan will ensure the collection of soil samples at the permitted unit at the following locations:

- a. one sample every 900 square feet beneath the permitted unit after the pad is removed for a total of eleven samples (*see* Permit Section 9.4.7.1.ii.a(2));
- b. five soil samples to address stormwater runoff (*see* Permit Section 9.4.7.1.ii.a(3)):
 - i. one from the northwest end of the permitted unit identified as ‘sample location 1’;
 - ii. one from the north end of the permitted unit identified as ‘sample location 2’;
 - iii. one from the southeast end of the permitted unit identified as ‘sample location 3’; and
- c. two from each of the areas immediately off the concrete in front of each roll-up door identified as ‘sample location 4’ and ‘sample location 5’ (*see* Permit Section 9.4.7.1.ii.a(1));
- d. one sample at each of the drainage points in the concrete-block building for a total of four samples (*see* Permit Section 9.4.7.1.ii.a(5));
- e. one sample beneath the sump at the southeast end of the permitted unit (*see* Permit Section 9.4.7.1.ii.a(5));
- f. one sample at all joints and intersections of the underground drainage system (*see* Permit Section 9.4.7.1.ii.a(7)); and
- g. one sample every 30 ft beneath the axis of the trench that runs the length of the dome for a total of five samples (*see* Permit Section 9.4.7.1.ii.a(8)).

A total of 24 samples will be collected from soils beneath the permitted unit as illustrated in Figure G.14-1. If there is liquid found in the trench drains or the dome sump at the time of sample collection, liquid samples will be collected in accordance with Section 6.2.1 of this closure plan.

At the time of sampling, the precise location of the grid samples will be randomly selected within each 900 square foot sampling box (*see* Figure G.14-1). These locations will be determined by applying a sub-grid of potential sampling points and randomly choosing one. This sampling strategy will result in a minimum of eleven samples taken from the soils beneath the permitted unit. If the review or assessment determines the need to obtain additional samples within the area of the sampling box (*e.g.*, at concrete or asphalt cracks), these sample locations will be in addition to the grid sampling locations.

6.2 Sample Collection Procedures

Samples will be collected in accordance with Permit Section 9.4.7.1 and the procedures identified in this sampling and analysis plan which incorporates guidance from the United States Environmental Protection Agency (USEPA) (EPA, 2002), DOE (DOE, 1995), and other Department-approved procedures.

6.2.1 Liquid Sampling

Liquids will be collected and analyzed to determine if residual hazardous constituents remain in the drain lines or sumps at the permitted unit. Liquid samples will be collected using glass or plastic tubes, a composite liquid waste sampler, a bacon bomb, a bailer, or by pouring liquid into sample containers.

6.2.2 Wipe Sampling

Surface wipe samples will be collected and analyzed to determine if residual hazardous constituents remain on the surfaces or related equipment at the permitted unit. Samples will be collected in accordance with the National Institute of Occupational Safety and Health (NIOSH) *Manual of Analytical Methods* (NIOSH, 1994). The appropriate wipe sample methods will consider the type of surface being sampled, the type of constituent being sampled for, the solution used, and the desired constituent concentration detection limit.

The NIOSH method includes wiping a 100 square centimeter area at each discrete location with a gauze wipe wetted with a liquid solution appropriate for the desired analysis (*e.g.*, deionized water for lead). For wipe sampling, guidance from the analytical laboratory must be obtained prior to wipe verification sampling to confirm that the solution chosen for each analysis is appropriate for the analysis to be conducted and that wipe sampling is a proper technique for the analysis.

6.2.3 Soil Sampling

Soil samples will be collected and analyzed to determine if hazardous constituents are present in soils at the permitted unit. Samples will be collected using a spade, scoop, auger, trowel, or other equipment as specified in the approved methods for the type of analytes (*i.e.*, EPA 1996 or 2002) and from the appropriate depths as directed in Permit Section 9.4.7.1.ii. Samples will be kept at their at-depth temperature or lower, protected from ultraviolet light, sealed tightly in the recommended container, and analyzed within the specific holding times listed in Table G.14-4.

6.2.4 Cleaning of Sampling Equipment

Reusable sampling equipment will be cleaned and rinsed prior to use. Sampling equipment rinsate blanks will be collected and analyzed only if reusable sampling equipment is used. Reusable decontamination equipment, including protective clothing and tools, used during closure activities will be scraped as necessary to remove residue and cleaned with a wash water solution. Sampling equipment will be cleaned prior to each use with a wash solution, rinsed several times with tap water, and air-dried to prevent cross contamination of samples. A disposable sampler is considered clean if still in a factory-sealed wrapper.

6.3 Sample Management Procedures

The following sections provide a description of sample documentation, handling, preservation, storage, packaging, and transportation requirements that will be followed during the sampling activities associated with the closure.

6.3.1 Sample Documentation

Sampling personnel will complete and maintain records to document sampling and analysis activities. Sample documentation will include sample identification numbers, chain-of-custody forms, analysis requested, sample logbooks detailing sample collection activities, and shipping forms (if necessary).

6.3.1.1 Chain-of-Custody

Chain-of-custody forms will be maintained by sampling personnel until the samples are relinquished to the analytical laboratory. This will ensure the integrity of the samples and provide for an accurate and defensible written record of the sampling possession and handling from the time of collection until laboratory analysis. One chain-of-custody form will be used to document all of the samples collected from a single sampling event. The sample collector will be responsible for the integrity of the samples collected until properly transferred to another person. The EPA considers a sample to be in a person's custody if it is:

- a. in a person's physical possession;
- b. in view of the person in possession; or
- c. secured by that person in a restricted access area to prevent tampering.

The sample collector will document all pertinent sample collection data. Individuals relinquishing or receiving custody of the samples will sign, date, and note the time on the analysis request/chain-of-custody form. A chain-of-custody form must accompany all samples from collection through laboratory analysis. The analytical laboratory will return the completed chain-of-custody form to the Facility and it will become a part of the permanent sampling record documenting the sampling effort.

6.3.1.2 Sample Labels and Custody Seals

A sample label will be affixed to each sample container. The sample label will include the following information:

- a. a unique sample identification number;
- b. name of the sample collector;
- c. date and time of collection;
- d. type of preservatives used, if any; and
- e. location from which the sample was collected.

A custody seal will be placed on each sample container to detect unauthorized tampering with the samples. These labels must be initialed, dated, and affixed by the sample collector in such a manner that it is necessary to break the seal to open the container.

6.3.1.3 Sample Logbook

All pertinent information on the sampling effort must be recorded in a bound logbook. Information must be recorded in ink and any cross outs must be made with a single line and the change initialed and dated by the author. The sample logbook will include the following information:

- a. the sample location;
- b. suspected composition;
- c. sample identification number;
- d. volume/mass of sample taken;
- e. purpose of sampling;
- f. description of sample point and sampling methodology;
- g. date and time of collection;
- h. name of the sample collector;
- i. sample destination and how it will be transported;
- j. observations; and
- k. name(s) of personnel responsible for the observations.

6.3.2 Sample Handling, Preservation, and Storage

Samples will be collected and containerized in appropriate pre-cleaned sample containers. Table G.14-4 presents the requirements in SW-846 (EPA, 1986) for sample containers, preservation techniques, and holding times. Samples that require cooling to 4 degrees Celsius will be placed in a cooler with ice or ice gel or in a refrigerator immediately upon collection.

6.3.3 Packaging and Transportation of Samples

All packaging and transportation activities will meet safety expectations, QA requirements, DOE Orders, and relevant local, state, and federal laws (including 10 CFR and 49 CFR). Appropriate Facility documents establish these requirements for packaging design, testing, acquisition, acceptance, use, maintenance, and decommissioning and for on-site, intra-site, and off-site shipment preparation and transportation of general commodities, hazardous materials, substances, waste, and defense program materials.

Off-site transportation of samples will occur via private, contract, or common motor carrier; air carrier; or freight. All off-site transportation will be processed through the Facility packaging and transportation organization, unless the shipper is specifically authorized through formal documentation by that organization to independently tender shipments to common motor or air carriers.

6.4 Sample Analysis Requirements

Samples will be analyzed for all the hazardous constituents listed in Appendix VIII of 40 CFR Part 261 and in Appendix IX of 40 CFR Part 264 that have been stored at the permitted unit over its operational history. Samples will be analyzed by an independent laboratory using the methods outlined in Table G.14-3. Analytes, test methods and instrumentation, target detection limits, and rationale for metals and organic analyses are presented in Table G.14-3. If any of the information from these tables has changed at the time of closure, the Permittees will amend this closure plan to update all methods in this SAP.

6.4.1 Analytical Laboratory Requirements

The analytical laboratory will perform the detailed qualitative and quantitative chemical analyses specified in Permit Section 7.5.2. The analytical laboratory will have:

- a. a documented comprehensive QA/ QC program;
- b. technical analytical expertise;
- c. a document control/records management plan; and,
- d. the capability to perform data reduction, validation, and reporting.

The selection of the analytical testing methods identified in Table G.14-3 was based on the following considerations:

- e. the physical form of the waste;
- f. constituents of interest;
- g. required detection limits (*e.g.*, regulatory thresholds); and,
- h. information requirements (*e.g.*, waste classification).

6.4.1.1 Quality Assurance/Quality Control

All sampling and analysis will be conducted in accordance with QA/QC procedures defined by the latest revision of "Test Methods for Evaluating Solid Waste, Physical/Chemical Methods" (*SW-846*) (EPA, 1986) or other Department-approved procedures. Field sampling procedures and laboratory analyses will be evaluated through the use of QA/QC samples to assess the overall quality of the data produced. QC samples evaluate precision, accuracy, and potential sample contaminations associated with the sampling and analysis process, and are described in the following sections, along with information on calculations necessary to evaluate the QC results.

6.4.1.2 Field Quality Control

The field QC samples that will be collected include trip blanks, field blanks, field duplicates, and equipment rinsate blanks. Table G.14-5 presents a summary of QC sample types, applicable analyses, frequency, and acceptance criteria. QC samples will be given a unique sample identification number and submitted to the analytical laboratory as blind samples. QC samples will be identified on the applicable forms so that the results can be applied to the associated sample.

6.4.1.3 Analytical Laboratory QC Samples

QA/QC considerations are an integral part of analytical laboratory operations. Laboratory QA ensures that analytical methods generate data that are technically sound, statistically valid, and that can be documented. QC procedures are the tools employed to measure the degree to which these QA objectives are met.

6.4.2 Data Reduction, Verification, Validation, and Reporting

Analytical data generated by the activities described in this closure plan will be verified and validated. Data reduction is the conversion of raw data to reportable units; transfer of data between recording media; and computation of summary statistics, standard errors, confidence intervals, and statistical tests.

6.4.3 Data Reporting Requirements

Analytical results will include all pertinent information about the condition and appearance of the sample-as-received. Analytical reports will include:

- a. a summary of analytical results for each sample;
- b. results from QC samples such as blanks, spikes, and calibrations;
- c. reference to standard methods or a detailed description of analytical procedures; and,
- d. raw data printouts for comparison with summaries.

The laboratory will describe the analysis in sufficient detail so that the data user can understand how the sample was analyzed.

7.0 WASTE MANAGEMENT

All waste generated during closure will be controlled, handled, characterized, and disposed of in accordance with Permit Section 9.4.5, Permit Attachment C (*Waste Analysis Plan*), and Facility waste management procedures. Closure activities may generate different types of waste materials: these wastes are listed with potential disposal options in Table G.14-2 of this closure plan. Subsequent disposition options for the decontaminated structures and equipment include reuse, recycling, or disposal. Reusable protective clothing, tools, and equipment used during decontamination will be cleaned with a wash water solution. Disposable equipment and other small equipment that cannot be decontaminated, as summarized in Table G.14-2, will be containerized and managed as waste.

8.0 CLOSURE CERTIFICATION REPORT

Upon completion of the closure activities at the permitted unit, a final closure certification report will be prepared and submitted to the Department for review and approval in accordance with Permit Section 9.5.

9.0 REFERENCES

DOE, 1995. "DOE Methods for Evaluating Environmental and Waste Management Samples," DOE/EM-0089T, Rev. 2. Prepared for the U.S. Department of Energy by Pacific Northwest Laboratory, Richland, Washington.

EPA, 1986 and all approved updates. "Test Methods for Evaluating Solid Waste, Physical/Chemical Methods," EPA-SW-846, U.S. Environmental Protection Agency, Office of Solid Waste and Emergency Response, U.S. Government Printing Office, Washington, D.C.

EPA, 2002. "RCRA Waste Sampling Draft Technical Guidance Planning, Implementation, and Assessment," EPA530-D-02-002, August 2002, Office of Solid Waste, U.S. Environmental Protection Agency, Washington, D.C.

LANL, 1999. "Screening Level Ecological Risk Assessment Methods," LA-UR-99-1406, Los Alamos National Laboratory, Los Alamos, New Mexico.

NIOSH, 1994. The National Institute for Occupational Health and Safety (NIOSH) *Manual of Analytical Methods*, 4th ed. Issue 1. 1994.

NMED, 2006. "Technical Background Document for Development of Soil Screening Levels," Rev. 4.0, June 2006, New Mexico Environment Department, Santa Fe, New Mexico.

DRAFT

Table G.14-1

Closure Schedule for the Technical Area 54, Area G, Building 33, Indoor Container Storage Unit

Activity	Maximum Time Required
Notify the Department of intent to close.	-45 days
Final receipt of waste.	Day 0
Complete waste removal.	Day 90
Complete records review and structural assessment.	Day 100
Complete all closure activities and submit final closure certification report to the Department.	Day 180

DRAFT

Table G.14-2
Potential Waste Materials, Waste Types, and Disposal Options

Waste Materials	Waste Types	Disposal Options
Personal protective equipment (PPE)	Non-regulated solid waste	Subtitle D landfill
	Hazardous waste	The PPE will be treated to meet Land Disposal Restriction (LDR) treatment standards, if necessary, and disposed in a Subtitle C or D landfill, as appropriate.
	Low-level radioactive solid waste	Technical Area 54 (TA-54) Area G or off-site radioactive waste disposal facility
	Mixed waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill or the Waste Isolation Pilot Plant (WIPP), as appropriate.
Decontamination wash water	Non-regulated liquid waste	Sanitary sewer
	Hazardous waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill, as appropriate.
	Radioactive liquid waste	Radioactive Liquid Waste Treatment Facility (RLWTF)
	Mixed waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill or WIPP, as appropriate.
Metal	Non-regulated solid waste	Subtitle D landfill or recycled
	Hazardous waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill, as appropriate.
	Low-level radioactive solid waste	TA-54 Area G or off-site radioactive waste disposal facility
	Mixed waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill, or WIPP, as appropriate.

Waste Materials	Waste Types	Disposal Options
Discarded waste management equipment	Non-regulated solid waste	Subtitle D landfill
	Hazardous waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill, as appropriate.
	Low-level radioactive solid waste	TA-54 Area G or off-site radioactive waste disposal facility
	Mixed waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill or WIPP, as appropriate.
Sampling equipment	Non-regulated solid waste	Subtitle D landfill
	Hazardous waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill, as appropriate.
	Low-level radioactive solid waste	TA-54 Area G or off-site radioactive waste disposal facility
	Mixed waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill or WIPP, as appropriate.
Dome structures	Non-regulated solid waste	Subtitle D landfill
	Hazardous waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill, as appropriate.
	Low-level radioactive solid waste	TA-54 Area G or off-site radioactive waste disposal facility
	Mixed waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill or WIPP, as appropriate.
Asphalt	Non-regulated solid waste	Subtitle D landfill or potentially, as included in corrective action activities at Area G.

Waste Materials	Waste Types	Disposal Options
	Hazardous waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill, as appropriate.
	Low-level radioactive solid waste	TA-54 Area G or off-site radioactive waste disposal facility
	Mixed waste	Waste will be treated to meet LDR treatment standards, if necessary, and disposed in a Subtitle C or D landfill or WIPP, as appropriate.

DRAFT

Table G.14-3
Summary of Analytical Methods

Analyte	EPA SW-846 Analytical Method ^a	Test Methods/ Instrumentation	Target Detection Limit ^b	Rationale
<i>Metal Analysis</i>				
Antimony	6010, 7010	ICP-AES, GFAA	20 ug/L	Determine the metal concentration in the samples.
Arsenic	6010, 7010, 7061A	ICP-AES, GFAA, CVAA	10 ug/L	
Barium	6010, 7010	ICP-AES, GFAA	200 ug/L	
Beryllium	6010, 7010	ICP-AES, GFAA	0.2 ug/L	
Cadmium	6010, 7010	ICP-AES, GFAA	2 ug/L	
Chromium	6010, 7010	ICP-AES, GFAA	10 ug/L	
Cobalt	6010, 7010	ICP-AES, GFAA	5 ug/L	
Copper	6010, 7010	ICP-AES, GFAA	5 ug/L	
Lead	6010, 7010	ICP-AES, GFAA	5 ug/L	
Mercury	6010, 7470A, 7471B	ICP-AES, CVAA	0.2 ug/L	
Selenium	6010, 7010, 7741A	ICP-AES, GFAA, CVAA	5 ug/L	
Silver	6010, 7010	ICP-AES, GFAA	10 ug/L	
Thallium	6010, 7010	ICP-AES, GFAA	30 ug/L	
Vanadium	6010, 7010	ICP-AES, GFAA	5 ug/L	
Zinc	6010, 7010	ICP-AES, GFAA	1 ug/L	
<i>Organic Analysis</i>				
Target compound list VOCs plus ten tentatively identified compounds (TIC)	8260B	GC/MS	10 mg/L	Determine the VOCs concentration in the samples.

Target compound list SVOCs plus 20 TICs	8270D, 8275	GC/MS	10 mg/L	Determine the SVOCs concentration in the samples.
<i>Other Parameters</i>				
Cyanide	9010, 9012	Colorimetric	20 ug/L	Determine cyanide concentration

^a U.S. Environmental Protection Agency (EPA), 1986 and all approved updates, "Test Methods for Evaluating Solid Waste, Physical/Chemical Methods," SW-846.

^b Detection limits listed for metals are for clean water. Detection limits for organics are expressed as practical quantitation limits. Actual detection limits may be higher depending on sample composition and matrix type.

- CVAA = Cold-vapor atomic absorption spectroscopy
- FLAA = Flame atomic absorption spectroscopy
- GC/MS = Gas chromatography/mass spectrometry
- GFAA = Graphite furnace atomic absorption spectroscopy
- ICP-AES = Inductively coupled plasma-atomic emission spectrometry
- mg/L = milligrams per liter
- ug/L = micrograms per liter

Table G.14-4
Sample Containers^a, Preservation Techniques, and Holding Times^b

Analyte Class and Sample Type	Container Type and Materials	Preservation	Holding Time
<i>Metals</i>			
Metals: Arsenic, Barium, Cadmium, Chromium, Lead, Selenium, Silver	Aqueous Media: 500-mL Wide-Mouth-Polyethylene or Glass with Teflon Liner	Aqueous Media: HNO ₃ to pH <2 Cool to 4°C	180 Days
	Solid Media: 125-mL Glass	Solid Media: Cool to 4°C	
Total Mercury	Aqueous Media: 500-mL Wide-Mouth-Polyethylene or Glass with Teflon Liner	Aqueous Media: HNO ₃ to pH <2 Cool to 4 °C	28 Days
	Solid Media: 125-mL Glass	Solid Media: Cool to 4°C	
<i>Volatile Organic Compounds</i>			
Target Compound Volatile Organic Compounds	Aqueous Media: Two 40-mL Amber Glass Vials with Teflon-Lined Septa	Aqueous Media: HCl to pH<2 Cool to 4 °C	14 days
	Solid Media: 125-mL Glass or Two 40-mL Amber Glass Vials with Teflon-Lined Septa	Solid Media: Cool to 4°C Add 5 mL Methanol or Other Water Miscible Organic Solvent to 40-mL Glass Vials	
<i>Semi-Volatile Organic Compounds</i>			

Target Compound Semi-volatile Organic Compounds	Aqueous Media: Four 1-L Amber Glass with Teflon-Lined Lid	Aqueous Media: Cool to 4 °C	Seven days from field collection to preparative extraction. 40 days from preparative extraction to determinative analysis.
	Solid Media: 250-mL Glass	Solid Media: Cool to 4°C	

^a Smaller sample containers may be required due to health and safety concerns associated with potential radiation exposure, transportation requirements, and waste management considerations.

^b Information obtained from “Test Methods for Evaluating Solid Waste, Physical/Chemical Methods,” SW-846, U.S. Environmental Protection Agency, 1986 and all approved updates.

°C = degrees Celsius

HNO₃ = nitric acid

HCl = hydrochloric acid

L = Liter

mL = milliliter

TCLP = Toxicity Characteristic Leaching Procedure

Table G.14-5

Quality Control Sample Types, Applicable Analyses, Frequency, and Acceptance Criteria

QC Sample Type	Applicable Analysis ^a	Frequency	Acceptance Criteria
Trip Blank	VOC	One set per shipping cooler containing samples to be analyzed for VOCs	Not Applicable
Field Blank	VOC/SVOC, metals	One sample daily per analysis	Not Applicable
Field Duplicate	Chemical	One for each sampling sequence	Relative percent difference less than or equal to 20 percent
Equipment Rinsate Blank ^b	VOC/SVOC, metals	One sample daily	Not Applicable

^a For VOC and SVOC analysis, if blank shows detectable levels of any common laboratory contaminant (e.g., methylene chloride, acetone, 2-butanone, toluene, and/or any phthalate ester), sample must exhibit that contaminant at a level 10 times the quantitation limit to be considered detectable. For all other contaminants, sample must exhibit the contaminant at a level 5 times the quantitation level to be considered detectable.

^b Collected only if reusable sampling equipment used.

Table G.14-6

List of Equipment at the Technical Area 54, Area G, Building 33 Indoor Container Storage Unit

Equipment	Decontamination	Disposal
Drum venting and associated equipment	X	X
Electrical infrastructure	X	X
Equipment and spill kit cabinets	X	X
Container pallets	X	X
Communication equipment	X	X
Access barriers and chains	X	X

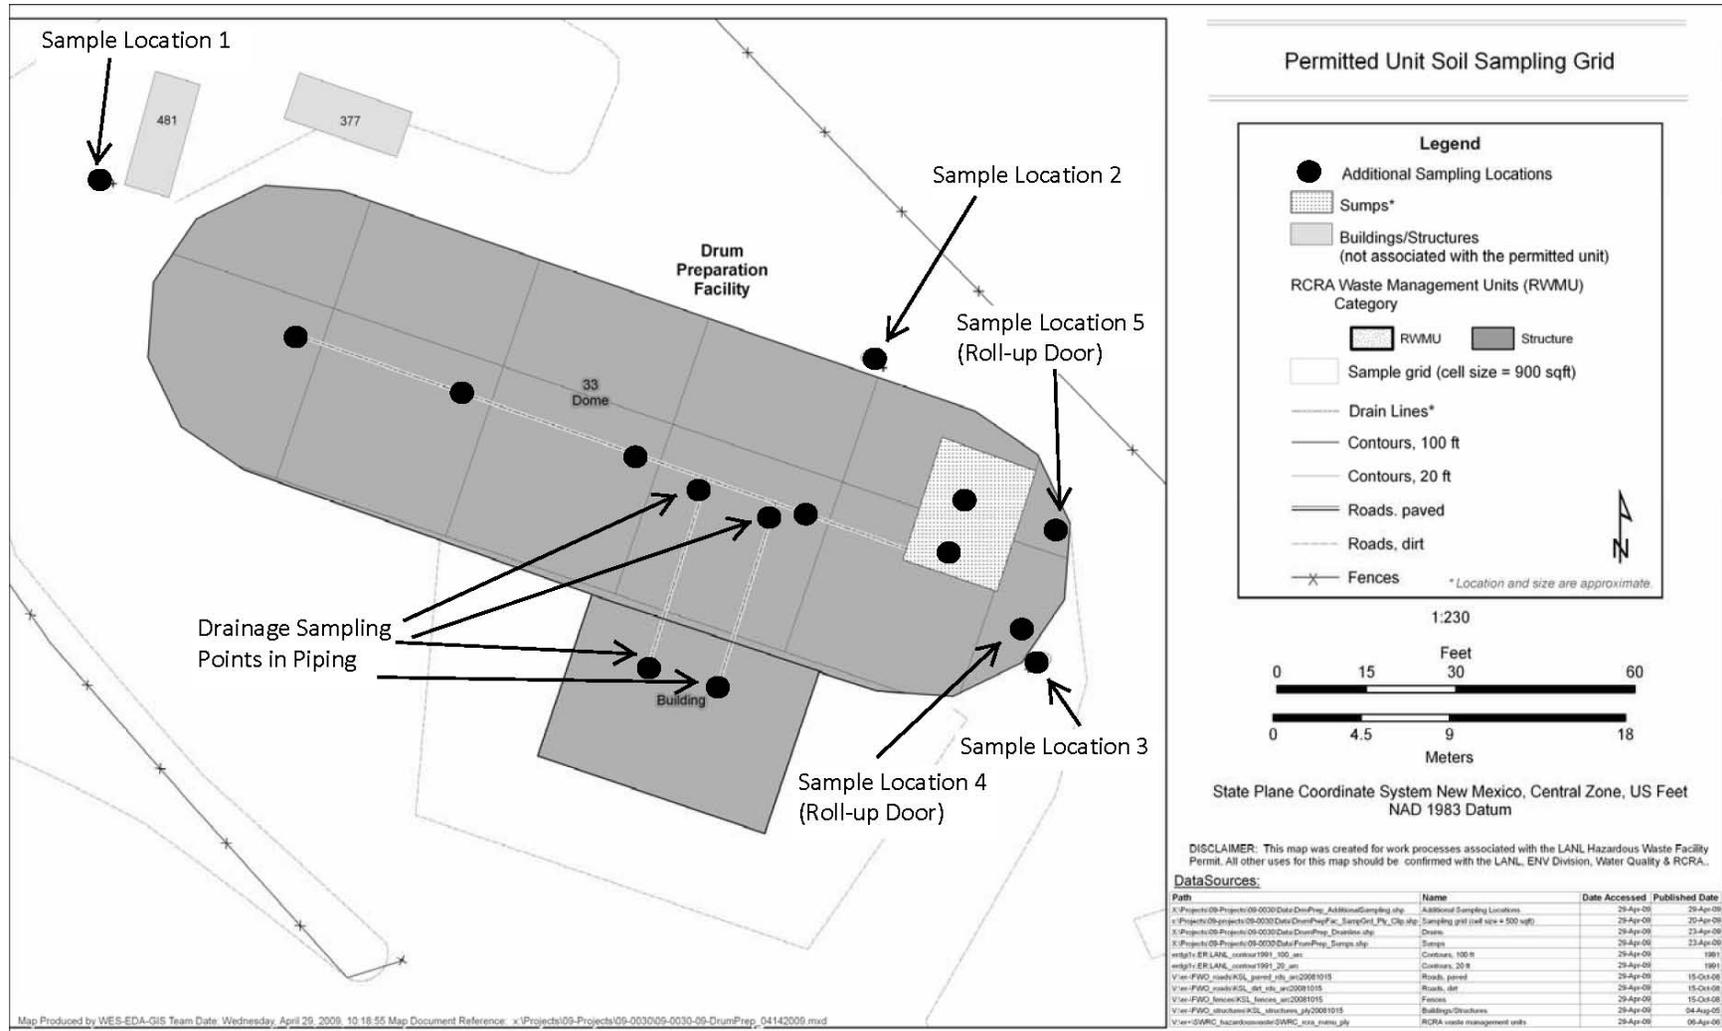


Figure G.14-1: Technical Area 54, Area G, Building 33, Indoor Container Storage Unit Grid Sampling and Additional Sampling Locations